


Total Risk Integrated Methodology (TRIM) Air Pollutants Exposure Model Documentation (TRIM.Expo / APEX, Version 4)

Volume II: Technical Support Document

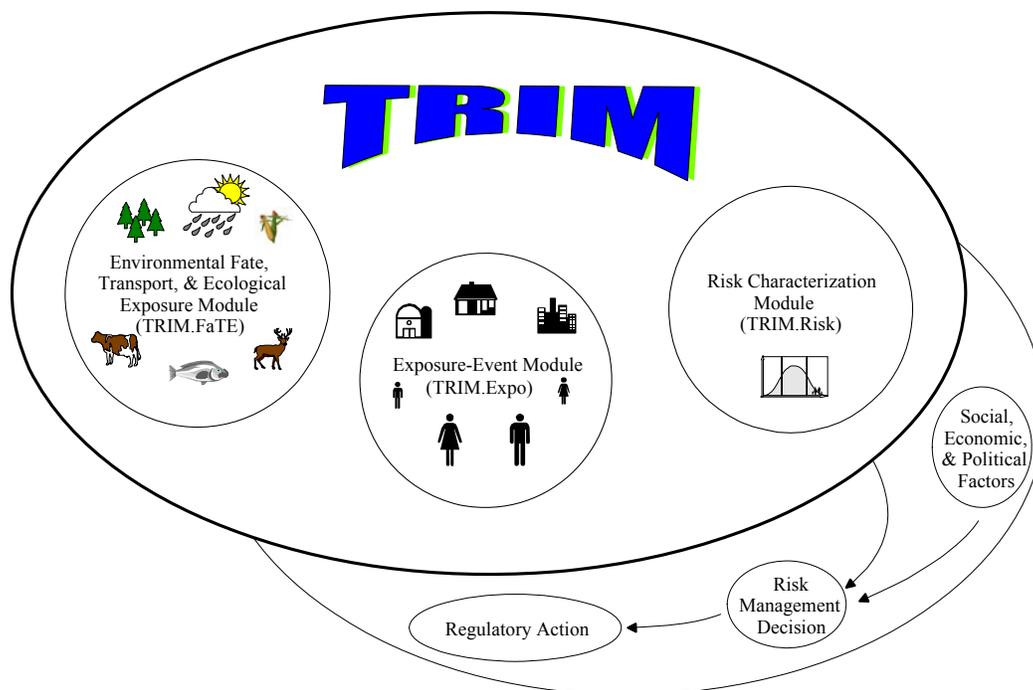

Office of Air Quality Planning and Standards
U.S. Environmental Protection Agency
Research Triangle Park, NC 27711

July 2006

DISCLAIMER

This document has been prepared by Alion Science and Technology, Inc. (through Contract No. 68-D-00-206). Any opinions, findings, conclusions, or recommendations are those of the authors and do not necessarily reflect the views of the EPA or Alion Science and Technology, Inc. Mention of trade names or commercial products is not intended to constitute endorsement or recommendation for use. Comments on this document should be addressed to John E. Langstaff, U.S. Environmental Protection Agency, C539-01, Research Triangle Park, North Carolina 27711 (email: langstaff.john@epa.gov).

ACKNOWLEDGEMENTS

The primary authors of this document are Graham Glen and Kristin Isaacs, Alion Science and Technology, Inc. Contributions have also been made by Luther Smith (Alion Science and Technology, Inc.), Tom McCurdy (EPA), and John Langstaff (EPA), Casson Stallings (Alion Science and Technology, Inc.) and ICF Consulting.

CONTENTS

CHAPTER 1. INTRODUCTION	1
1.1 TRIM and The APEX Model	1
1.2 Scope and Organization of This Document	1
1.3 Introduction to APEX.....	1
1.4 Strengths and Limitations of APEX.....	4
1.4.1 Strengths	4
1.4.2 Limitations	5
1.5 Applicability.....	6
1.6 Brief History of APEX.....	6
CHAPTER 2. OVERVIEW OF MODEL DESIGN AND ALGORITHMS	8
CHAPTER 3. CHARACTERIZING THE STUDY AREA	13
3.1 APEX Spatial Units.....	13
3.1.1 Initial Study Area.....	13
3.1.2 Sectors.....	13
3.1.3 Air Quality Districts.....	15
3.1.4 Meteorological Zones	16
3.2 Determining the Final Study Area	16
3.2.1 Matching Sectors, Air Quality Districts, and Meteorological Zones.....	16
3.2.2 The Distance Algorithm.....	16
3.3 Modeling Commuting	18
3.3.1 Nationwide Commuting Database for 2000	18
3.3.2 Implementation of Commuting in APEX	20
CHAPTER 4. GENERATING SIMULATED INDIVIDUALS (PROFILES).....	21
4.1 Demographic variables.....	24
4.2 Residential Variables.....	25
4.3 Physiological Profile Variables.....	26
4.4 Daily-Varying Variables	30
CHAPTER 5. CONSTRUCTING A SEQUENCE OF DIARY EVENTS.....	32
5.1 Constructing the Diary Pool.....	32
5.1.1 Diary Data.....	32
5.1.2 Grouping the Available Diaries into the Diary Pools	33
5.2 Basic (Random) Composite Diary Construction.....	34
5.3 Longitudinal Activity Diary Assembly.....	34
5.3.1 The Longitudinal Diary Assembly Algorithm.....	35
5.3.2 Selecting Appropriate D and A Values For a Simulated Population.....	39
CHAPTER 6. CALCULATING POLLUTANT CONCENTRATIONS IN MICROENVIRONMENTS	41
6.1 Defining Microenvironments	41
6.2 Calculating Concentrations in Microenvironments.....	44
6.2.1 Mass Balance Method.....	45
6.2.2 Factors Method	53
6.2.3 Microenvironment Parameter Definitions	53
6.2.3.1 Time and Area Mappings.....	57
6.2.3.2 Conditional Variables.....	58

6.2.3.3	Resampling Options.....	60
6.2.3.4	Random Number Seeds.....	61
6.2.3.5	Source Strength Specification.....	62
6.2.3.6	Specification of Distribution Data	64
CHAPTER 7.	ESTIMATING ENERGY EXPENDITURES AND VENTILATION.....	67
7.1	Generating the MET Time-Series	67
7.2	Adjusting the MET Time-Series for Fatigue and Excess Post-Exercise Oxygen Consumption	68
7.2.1	Simulation of Oxygen Deficit.....	70
7.2.1.1	Fast Processes	70
7.2.1.2	Slow Processes.....	71
7.2.1.3	Derivation of Appropriate Values for the Model Parameters.....	72
7.2.2	Adjustments to M for Fatigue.....	73
7.2.3	Adjustments to M for EPOC.....	74
7.2.3.1	Fast Processes	74
7.2.3.2	Slow Processes.....	74
7.3	Calculating PAI and the Ventilation Rates	75
7.3.1	Calculating PAI and Energy Expenditure.....	75
7.3.2	Calculating Oxygen Consumption and Ventilation Rates	75
CHAPTER 8.	CALCULATING EXPOSURES	77
8.1	Estimating Exposure	77
8.2	Exposure Summary Statistics.....	78
8.3	Exposure Summary Tables.....	79
CHAPTER 9.	CALCULATING CARBON MONOXIDE (CO) DOSE.....	82
9.1	Carboxyhemoglobin (COHb) Calculation	83
9.2	Definition of Dose Summary Statistics.....	85

LIST OF TABLES

Table 4-1. Profile Variables in APEX	22
Table 5-1. D and A Statistics Derived from the Southern California Children’s Study	40
Table 6-1. Example Mapping of CHAD Location Codes to APEX Microenvironments	41
Table 6-2. Microenvironmental Parameters	51
Table 6-3. Distributional Parameters.....	65

LIST OF EXHIBITS

Exhibit 6-1. Example of a Microenvironmental Parameter Description.....	55
Exhibit 6-2. Example of the Shortest Possible MP Description.....	56
Exhibit 6-3. Use of Source Number in MP Definition	63
Exhibit 6-4. Second MP Definition with Source Number 2.	63
Exhibit 6-5. Use of #sources Setting in <i>Simulation Control File</i>.....	64

LIST OF FIGURES

Figure 2-1a. Overview of APEX, Part 1.....	10
Figure 3-1. Example of Study Areas, Air Quality Districts, Meteorological Zones, and Sectors.....	14
Figure 4-1. Generating a Simulated Profile.....	24
Figure 5-1. Overview of the Longitudinal Diary Assembly Algorithm.....	36
Figure 6-1. The Mass Balance (MASSBAL) Model.....	46
Figure 7-1. Fast Components of Oxygen Deficit and Recovery.....	71

CHAPTER 1. INTRODUCTION

1.1 TRIM and The APEX Model

The Air Pollutants Exposure model (APEX) is part of EPA's overall Total Risk Integrated Methodology (TRIM) model framework (EPA, 1999), in particular the inhalation exposure component (TRIM.Expo_{Inhalation}). TRIM is a time series modeling system with multimedia capabilities for assessing human health and ecological risks from hazardous and criteria air pollutants; it is being developed to support evaluations with a scientifically sound, flexible, and user-friendly methodology. The TRIM design includes three modules:

- Environmental Fate, Transport, and Ecological Exposure module (TRIM.FaTE);
- Human Exposure-Event module (TRIM.Expo); and
- Risk Characterization module (TRIM.Risk).

APEX is designed to estimate human exposure to criteria and air toxic pollutants at local, urban, and regional scales. The current release of the model is APEX4. Note that APEX has been extensively reviewed. Any changes to the computer code may lead to results that cannot be supported by this documentation. Model enhancements, bug fixes, and other changes are occasionally made to APEX, and thus users are encouraged to revisit the website http://www.epa.gov/ttn/fera/human_apex.html for notices of these changes.

1.2 Scope and Organization of This Document

The documentation of the APEX4 model is currently divided into two volumes. *Volume II: Technical Support Guide* (this document) is intended to be a reference on the scientific basis of the APEX model. The scientific background, original references, and equations for the APEX model algorithms are included in this volume. Topics covered include the methods implemented in APEX for calculating microenvironmental concentrations, modeling ventilation, estimating dose, and assembling composite activity diaries. Other model algorithms, such as those for generating the study area and the simulated population are also described.

Volume I: User's Guide, is designed to be a hands-on guide to using APEX. It is applicable to all levels of expertise, from novice to advanced, and focuses on how to run the APEX computer model, develop the appropriate input files, and interpret the model output files.

1.3 Introduction to APEX

APEX estimates human exposure to criteria and toxic air pollutants using a stochastic, "microenvironmental" approach. That is, the model randomly selects data for a sample of hypothetical individuals from an actual population database and simulates each individual's

movements over time, in different locations (e.g., at home, in vehicles) to estimate their exposure to (and, optionally, dose of) the modeled pollutants. APEX can assume people live and work in the same general area (i.e., that the ambient air quality is the same at home and at work) or optionally can model commuting and thus exposure at the work location for employed individuals.

The APEX4 model uses the personal profile approach to generate simulated individuals, for whom exposure time series are calculated. The *profile* is a description of the characteristics of an individual that may affect either their activities or the concentrations in the microenvironments. Typically, the profile includes demographic variables such as age, gender, and employment status, as well as physiological variables such as height and weight, and finally some situational variables such as possession of a gas stove or air conditioning. The demographic variables are used in the selection of *activity diaries* from EPA's Consolidated Human Activity Database (CHAD, McCurdy et al., 2000) to represent the individual, while the situational variables are used to help calculate the microenvironmental concentrations. The physiological variables are used in the calculation of pollutant dose.

An APEX4 model run consists of calculating the exposure (and optionally dose) time series for a user-specified number of profiles. Collectively, these profiles are intended to be a representative random sample of the population in a given study area. To this end, tables of demographic data from the decennial census are used, so appropriate probabilities for any given geographical area can be derived. In APEX4 the geographical units are called *sectors*. Using the standard input files provided with the model, each sector is a census tract. Ambient air quality and meteorological data for the study area are also required by the model; the area covered by an air quality monitor is called a *district*, and the area covered by a meteorological monitor is called a *zone*. APEX matches up each sectors of the study area with an appropriate air quality district and meteorological zone to provide all the data necessary to simulate exposure and dose for an individual.

APEX can be thought of as a simulation of a field study that would involve selecting an actual sample of specific individuals who live in (or work and live in) a geographic area and then continuously monitoring their activities and subsequent inhalation exposures to a specific air pollutant during a specific period of time. The main differences between the model and an actual field study are that in the model:

- The sample of individuals is a “virtual” sample, created by the model according to various demographic variables and census data of relative frequencies, in order to obtain a representative sample (to the extent possible) of the actual people in the study area;
- The activity patterns of the sampled individuals (e.g., the specification of indoor and other microenvironments, the duration of time spent in each) are assumed by the model to be similar to individuals with similar demographic characteristics, according to activity data such as diaries compiled in EPA's Consolidated Human Activities Database (CHAD) (EPA, 2002c; McCurdy et al., 2000);

- The pollutant exposure concentrations and doses are estimated by the model using temporally and spatially varying ambient outdoor concentrations, coupled with information on the behavior of the pollutant in various microenvironments; and
- Various reductions in ambient air quality levels can be simulated by either adjusting air quality concentrations to reflect scenarios under consideration or by reducing source emissions and obtaining air quality modeling outputs that reflect these potential emission reductions.

Thus, the model accounts for the most significant factors contributing to inhalation exposure—the temporal and spatial distribution of people and pollutant concentrations throughout the study area and among the microenvironments—while also allowing the flexibility to adjust some of these factors for regulatory assessments and other reasons.

Nomenclature. The following terms are used throughout this guide:

- Diary—a set of events or activities (e.g., cooking, sleeping) for an individual in a given time frame (e.g., a day).
- Air quality district—the geographical area represented by a given set of ambient air quality data (either based on a fixed-site monitor or output from an air quality model).
- Event—an activity (e.g., cooking) with a known starting time, duration, microenvironment, and location (usually home or work).
- Microenvironment—a space in which human contact with an environmental pollutant takes place.
- Profile—a set of characteristics that describe the person being simulated (e.g., age, gender, height, weight, employment status, whether an owner of a gas stove or air conditioner).
- Sector—the basic geographical unit for the demographic input to APEX (usually census tracts).
- Study Area—the geographical area modeled.
- Study Area Population—total population of persons who live in the study area.
- Meteorological zone—similar to air quality district, but for the meteorological data.

Labeling Conventions. The labeling used in this document is as follows.

- *Input and output file names* are in italics.
- ***Model Variables*** are in bold italics, generally only when first used in a section.
- **KEYWORDS**, which are used in the input files to identify variables and settings, are given in uppercase bold italics.

- `Input and output file excerpts` are in a box surrounded by a single line, indicating that the text inside the box is shown exactly as it exists in electronic form.
- This document also contains references to the APEX4 model code. Specifically, the discussions of the model algorithms include mention to the module and function or subroutine in which they are implemented. The code locations are given in bold non-italic text in the format **Module:Subroutine** or **Module:Function**.

1.4 Strengths and Limitations of APEX

All models have strengths and limitations, and for each application it is important to carefully select the model that has the desired attributes. With this in mind, it is equally important to understand the strengths and weaknesses of the chosen model. The following sections provide a summary of the strengths and potential limitations of APEX.

1.4.1 Strengths

APEX simulates the movement of individuals through time and space to estimate their exposure to a given pollutant in indoor, outdoor, and in-vehicle microenvironments. Compared to conducting a field study that would involve identifying, interviewing, and monitoring specific individuals in a study area, APEX provides a vastly less expensive, more timely, and more flexible approach. The model also allows different air quality data, exposure scenarios, and other inputs and thus is very useful for decision making applications.

An important feature of APEX is its versatility. The model is designed with a great deal of flexibility so that different levels of detail in input data can be applied for different applications. The input data sets supplied with APEX contain information for several microenvironments, covering the needs of most applications. The air quality data input to the model can be in the form of monitoring or modeling data. The data can be for specific locations, or geo-political units such as counties, or census units such as tracts, or the locations of air dispersion model receptors, or the grid cells of Eulerian model output. Criteria and hazardous air pollutants can be modeled by APEX.

A key strength of APEX is the way it incorporates stochastic processes representing the natural variability of personal profile characteristics, activity patterns, and microenvironment parameters. In this way, APEX is able to represent much of the variability in the exposure estimates resulting from the variability of the factors effecting human exposure.

Another strength of APEX is its ability to estimate hourly exposures and doses for all simulated individuals in the sample population from the study area. This ability allows for powerful statistical analysis of a number of exposure characteristics (e.g., acute and chronic exposure, correlations with activities and demographics), many of which are provided automatically by APEX in output tables.

APEX also estimates the exposures of workers in the areas where they work, in addition to the areas where they live. The pollutant concentrations in these respective locations may be very different from each other.

Exposure analysis with APEX has been facilitated by the development of supplied input files derived from the databases discussed above: national population demographics and commuting information from the 2000 U.S. Census; CHAD activity data; and microenvironment definitions.

1.4.2 Limitations

The following limitations of APEX have been identified:

- The population activity pattern data supplied with APEX (CHAD activity data) are compiled from a number of studies in different areas, and for different seasons and years. Therefore, the combined data set may not constitute a representative sample. Nevertheless, the largest portion of CHAD (about 40 percent) is from a study of national scope, carried out from 1992-1994 (Klepeis et al., 1995), which could be extracted by the user if desired to create a representative sample.
- The commuting data address only home-to-work travel. The population not employed outside the home is assumed to always remain in the residential census tract. Furthermore, although several of the APEX microenvironments account for time spent in travel, the ambient air quality during travel is assumed to be a composite of the air quality in the home and work tracts (as opposed to the air quality in the tracts traveled through).
- APEX creates seasonal or year-long sequences of activities for a simulated individual by sampling human activity data from more than one subject in CHAD. Thus, uncertainty exists about season-long exposure event sequences. This approach can tend to underestimate the variability from person to person, because each simulated person essentially becomes a composite or an “average” of several actual people in the underlying activity data (which tends to dampen the variability). At the same time, this approach may overestimate the day to day variability for any individual if each simulated person is represented by a sequence of potentially dissimilar activities from different people rather than more similar activities from one person. These uncertainties have been partly removed with the implementation in APEX of an algorithm for combining diaries which addresses these limitations to some extent.
- The model currently does not capture certain correlations among human activities that can impact microenvironmental concentrations (e.g., cigarette smoking leading to an individual opening a window, which in turn affects the amount of outdoor air penetrating the residence).
- Certain aspects of the personal profiles are held constant, though in reality they change every year (e.g., age). This is only an issue for simulations spanning several years.

Other data and model limitations exist besides those identified above, including physiological, meteorological, and those associated with estimating concentrations in microenvironments. EPA will continue to refine the model and data to reduce these limitations to the extent possible. Work is in progress to characterize the uncertainties which result from these limitations of APEX.

1.5 Applicability

APEX is an advanced air inhalation exposure model which can be used for a range of applications. APEX can be employed to model episodic "high-end" inhalation exposures that result from highly localized pollutant concentrations (e.g., residual risk assessments). APEX can also provide detailed probabilistic estimates of exposure for urban and greater metropolitan areas (e.g. for regulatory analyses supporting national decisions such as NAAQS reviews). APEX is appropriate for assessing both long-term chronic and short-term acute inhalation exposures of the general population or of specific segments of the population. The model is designed to look at the range of inhalation exposures of different groups of people across a population, for a range of averaging times, in a single simulation. The current version of APEX produces results for averaging times of 1 hour, 8 hours, 24 hours, and annual (or the length of a simulation, if shorter than one year).

Due to the computational demands (run time and disk space) of running APEX, it is not appropriate for national-level assessments of population exposure. However, this is not an inherent limitation in the model code or algorithms.

1.6 Brief History of APEX

APEX was originally derived from the probabilistic National Ambient Air Quality Standards Exposure Model (pNEM). The NEM series was developed to estimate exposure to the criteria pollutants (e.g., CO, ozone). In 1979, EPA began to develop NEM by assembling a database of human activity patterns that could be used to estimate exposures to outdoor pollutants (Roddin et al., 1979). The data were then combined with measured outdoor concentrations in NEM to estimate exposures to CO (Biller et al., 1981; Johnson and Paul, 1983). In 1988, OAQPS began to incorporate probabilistic elements into the NEM methodology, using activity pattern data based on various human activity diary studies in an early version of probabilistic NEM for ozone (pNEM/O₃). In 1991, a probabilistic version of NEM was developed for CO (pNEM/CO) that included a one compartment mass-balance model to estimate CO concentrations in indoor microenvironments (Johnson et al., 1992). A newer version of pNEM/O₃ was developed in the 1990's and applied to nine urban areas for the general population, outdoor children, and outdoor workers (Johnson et al., 1996a,b,c). During 1999-2001, an updated version of pNEM/CO (versions 2) was developed that relied on activity diary data from CHAD and enhanced algorithms for simulating gas stove usage, estimating alveolar ventilation rate (a measure of human respiration), and modeling home-to-work commuting patterns.

APEX evolved from pNEM to provide greater applicability, flexibility, and accuracy. The APEX model was substantially different than pNEM, particularly in the use of a personal profile

approach rather than a cohort simulation approach. APEX introduced a number of new features including automatic site selection from large (e.g., national) databases, a series of new output tables providing summary statistics, and a thoroughly reorganized method of describing microenvironments and their parameters. Most of the spatial and temporal constraints were removed or relaxed in APEX. Several major improvements to APEX have been introduced in the most recent version, APEX4. Specifically, APEX4 includes:

- algorithms for the assembly of multi-day (longitudinal) activity diaries that model intra-individual variance, inter-individual variance, and day-to-day autocorrelation in diary properties.
- methods for adjusting diary-based energy expenditures for fatigue and excess post-exercise oxygen consumption
- new equations for estimation of ventilation
- the ability to model commuters leaving the study area
- new output files containing diary event-level and hourly-level exposure, dose, and ventilation data, and hourly-level microenvironmental data
- the ability to model the prevalence of disease states such as asthma
- new output exposure tables that report exposure statistics for subpopulations such as children and active people.
- the inclusion of commuting data from the 2000 census

CHAPTER 2. OVERVIEW OF MODEL DESIGN AND ALGORITHMS

This chapter provides a brief outline of the key modeling steps, logic processes, and databases used in APEX4.

APEX is designed to simulate population exposure to criteria and air toxic pollutants at local, urban, and regional scales. The user specifies the geographic area to be modeled and the number of individuals to be simulated to represent this population. APEX then generates a personal profile for each simulated person that specifies various parameter values required by the model. The model next uses diary-derived time/activity data matched to each personal profile to generate an exposure event sequence (also referred to as “activity pattern” or “composite diary”) for the modeled individual that spans a specified time period, such as one year. Each event in the sequence specifies a start time, an exposure duration, a geographic location, a microenvironment, and an activity. Probabilistic algorithms are used to estimate the pollutant concentration and ventilation (respiration) rate associated with each exposure event. The estimated pollutant concentrations account for the effects of ambient (outdoor) pollutant concentration, penetration factor, air exchange rate, decay/deposition rate, and proximity to emission sources, depending on the microenvironment, available data, and the estimation method selected by the user. The ventilation rate is derived from an energy expenditure rate estimated for the specified activity. Because the modeled individuals represent a random sample of the population of interest, the distribution of modeled individual exposures can be extrapolated to the larger population.

The model simulation includes up to seven steps:

1. Characterize the study area - APEX selects sectors (e.g., census tracts) within a study area—and thus identifies the potentially exposed population—based on the user-defined center and radius of the study area and availability of air quality and weather input data for the area.
2. Generate simulated individuals - APEX stochastically generates a sample of simulated individuals based on the census data for the study area and human profile distribution data (such as age-specific employment probabilities). The user can specify the size of the sample. The larger the sample, the more representative it is of the population in the study area (but also the longer the computing time).
3. Construct a sequence of activity events - APEX constructs an exposure event sequence (activity pattern) spanning the period of simulation for each of the simulated persons (based on the supplied Consolidated Human Activity Database (CHAD) data, although other data could be used).
4. Calculate hourly concentrations in microenvironments - APEX enables the user to define microenvironments that people in a study area would visit (e.g., by grouping location codes included in the supplied CHAD database). The model then calculates hourly concentrations of a pollutant in each of the microenvironments for the period of

simulation, based on the user-provided hourly ambient air quality data. All the hourly concentrations in the microenvironments are re-calculated for each of simulated individuals.

5. Estimate energy expenditures and ventilation – APEX constructs a time-series of energy expenditures for each profile based on the the activity event sequence. These expenditures are adjusted for physiological realism, and then used to estimate a number of ventilation metrics that are later used in estimating dose and in identifying an active subpopulation of active persons for use in creating exposure summary tables.
6. Calculate exposures - APEX assigns a concentration to each exposure event based on the microenvironment occupied during the event and the person’s activity. These values are averaged by clock hour to produce a sequence of hourly-average exposures spanning the specified exposure period (typically one year). These hourly values may be further aggregated to produce daily, monthly, and annual average exposure values.
7. Calculate doses - APEX optionally calculates hourly, daily, monthly, and annual average dose values for each of the simulated individuals. This option currently is available only for CO.

The model simulation continues until exposures are calculated for the user-specified number of simulated individuals. Figure 2-1a. Overview of APEX, Part 1 presents these steps within a schematic of the APEX model design. The following chapters provide additional detail on the algorithms used in each of the above simulation steps.

The above steps are largely self-contained in the APEX computer code and do not depend on subsequent steps. For example, the generation of simulated individuals (step 2) is independent of any other profile characteristics or modeling results. This means that the profile variables do not depend on the diaries assigned to that profile or to the properties of the microenvironments for that profile. The assignment of diaries to the profile (step 3) depends on the profile variables but not on the microenvironments, the exposure, the dose, or the properties of any other profile. The calculation of microenvironment concentrations (step 4) can depend on the profile variables through the use of conditional variables, but in APEX this step cannot depend on the contents of the selected activity diaries. Conceptually, this means that the microenvironments essentially have an existence of their own that is independent of the activities of the profile. For example, activities such as smoking and cooking can “occur” in a residence even when the person being profiled is not at home. In reality, the activities of the profiled person can have some effect on the microenvironments they visit, but this is not captured in the present version of the model. However, through the judicious use of source terms in microenvironments, APEX can simulate changes in concentrations due to the presence of the person (e.g., a “personal cloud” effect).

1. Characterize study area

2. Characterize study population

3. Generate N number of simulated individuals (profiles)

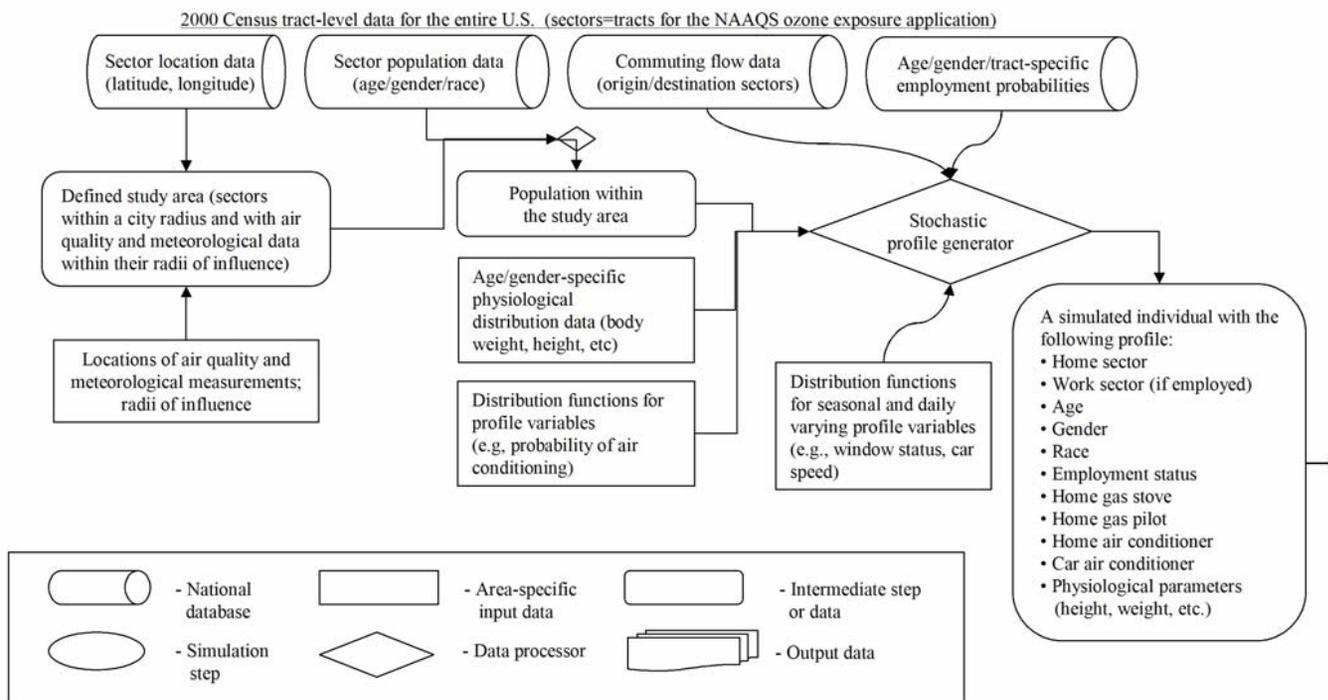


Figure 2-1a. Overview of APEX, Part 1

**4. Construct sequence of activity events
for each simulated individual**

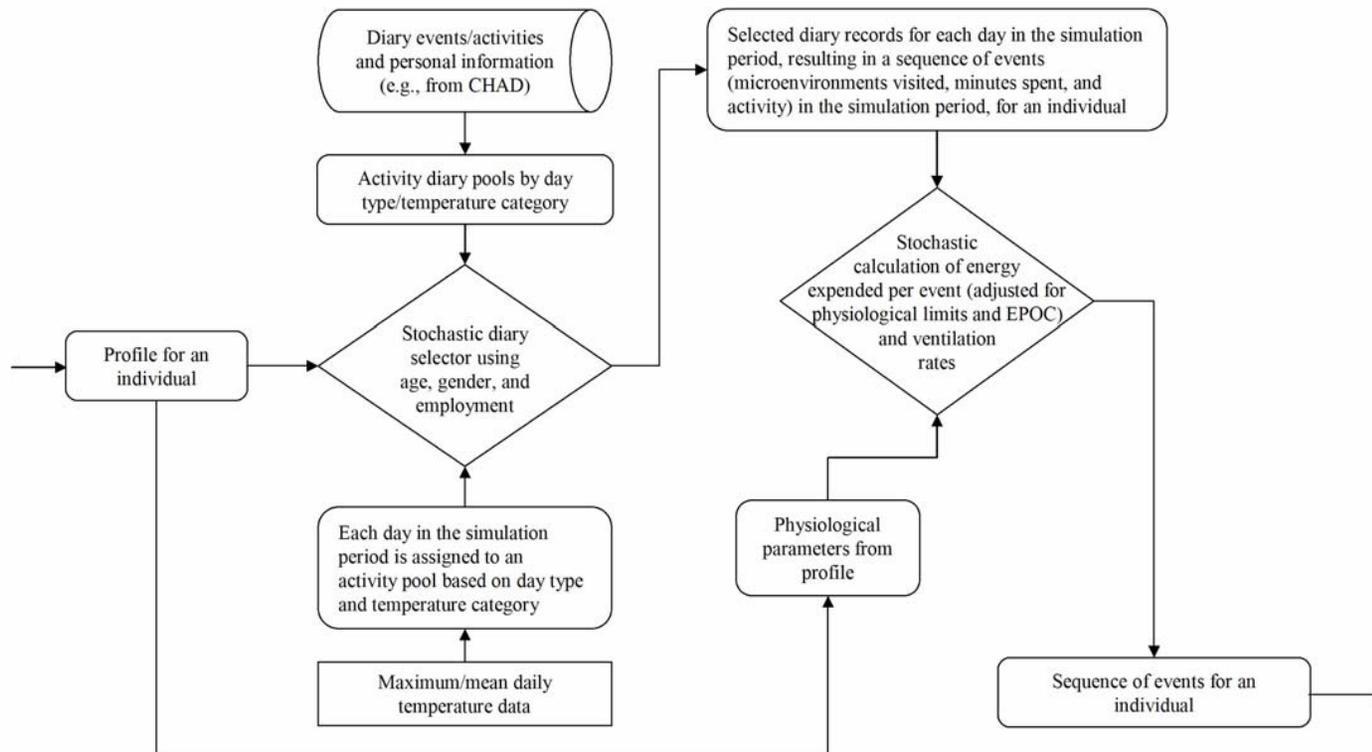


Figure 2-1b. Overview of APEX, Part 2

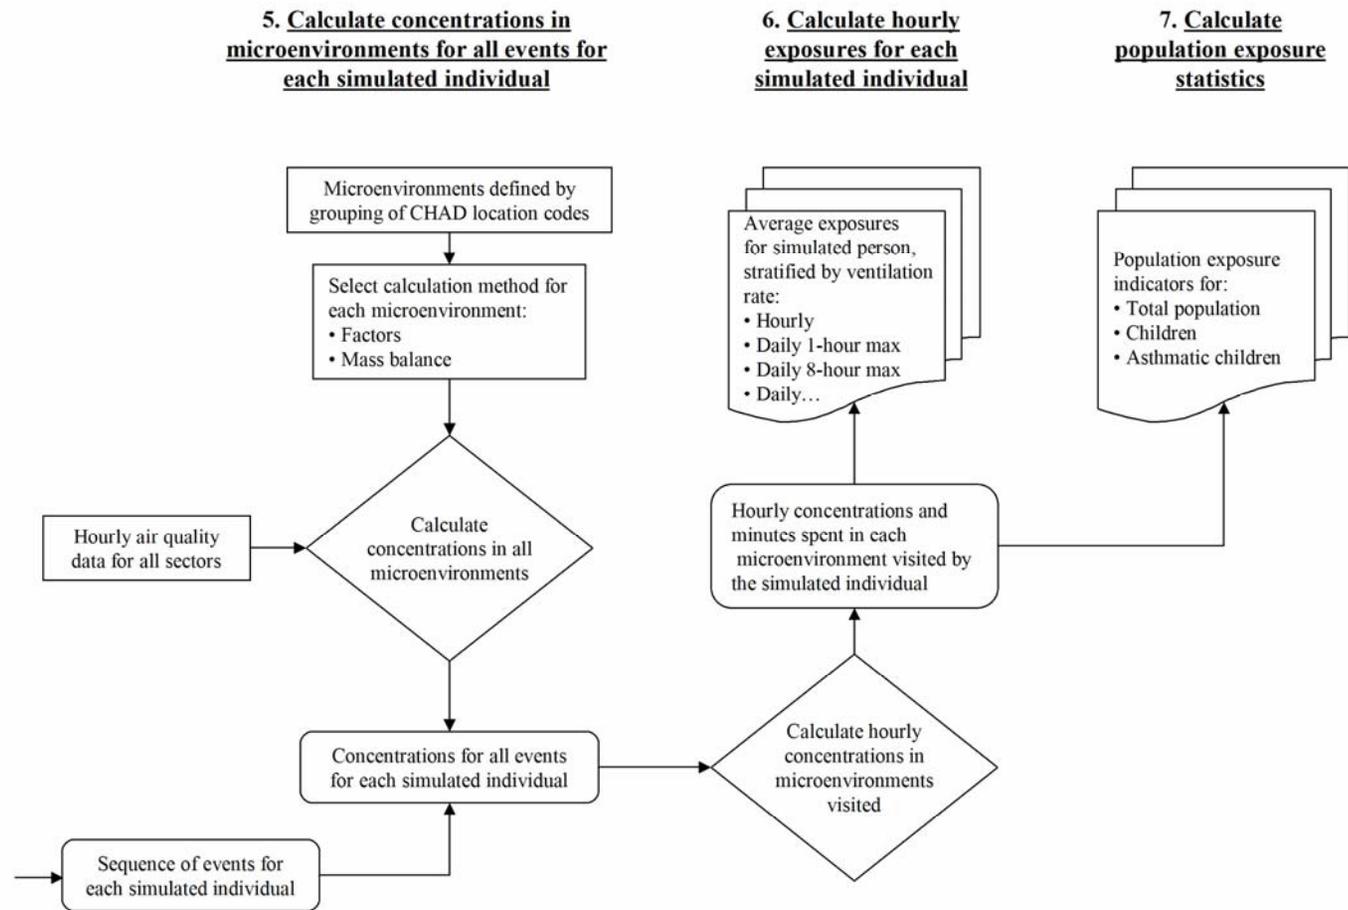


Figure 2-1c. Overview of APEX, Part 3

CHAPTER 3. CHARACTERIZING THE STUDY AREA

An initial study area in an APEX analysis consists of a set of basic geographic units called sectors, typically defined as census tracts. (See **Nomenclature**, section 1.3) The user provides the geographic center (latitude/longitude) and radius of the study area. APEX calculates the distances to the center of the study area of all the sectors included in the sector location database, and then selects the sectors within the radius of the study area. APEX then maps the user-provided hourly air quality district and daily meteorological zone data to the selected sectors. The sectors identified as having acceptable air and meteorological data within the radius of the study area are selected to comprise a final study area for the APEX simulation analysis. This final study area determines the population make-up of the simulated persons (profiles) to be modeled.

The following sections describe in more detail how a final study area is determined in an APEX simulation analysis.

3.1 APEX Spatial Units

3.1.1 Initial Study Area

The APEX study area has typically been on the scale of a city or larger metropolitan area. Larger study areas are possible to simulate, depending on computing capabilities, available data, and the desired precision of the run.

The user defines an initial study area by specifying the latitude and longitude of a central point (referred to here as the *study area central location*), together with a radius. The user also has the option of providing a list of counties to be modeled. If present, this list further restricts the area to the counties to be modeled which are within the specified study area radius. The final study area is a function of the availability of the user-supplied demographic data, pollutant concentration data, and the meteorological data within the initial or intermediate study area, as determined respectively by population sectors, air quality districts, and meteorological zones. Figure 3-1 and the subsections below provide additional details about these geographical units.

3.1.2 Sectors

The demographic data used by the model to create personal profiles is provided at the sector level. For each sector the user must provide demographic information allowing the determination of age, gender, race, and work status. This is most commonly done by equating sectors with census tracts and providing input files with counts at the tract level for each age, gender, and race combination. The current release of APEX includes input files that already contain this demographic and location data for all census tracts in the 50 states and D.C., based on the 2000 Census. One of the APEX input files (generically named *Sector Location* file in this guide) lists the sector ID and location for all sectors that have associated population data. The supplied *Sector Location* file has been prepared listing all the census tracts in the 2000 U.S.

Census. Corresponding *Population* files have been supplied as well. This allows the user to model any desired study area in the country without having to make any changes to these input files.

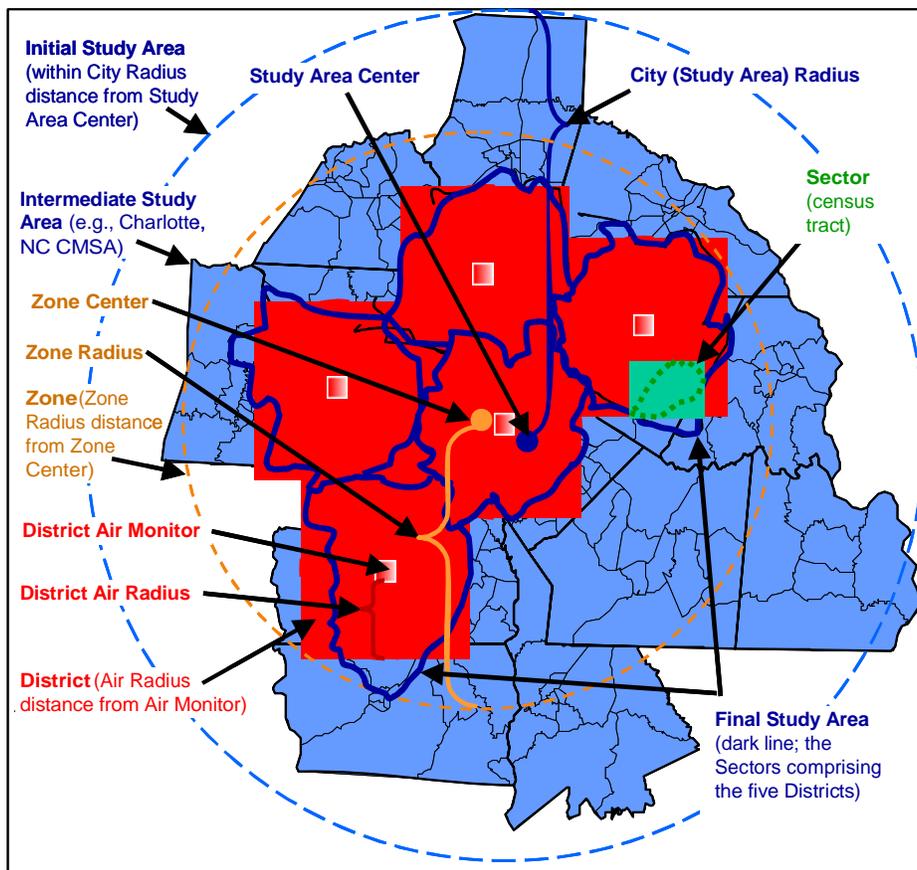


Figure 3-1. Example of Study Areas, Air Quality Districts, Meteorological Zones, and Sectors

If available, finer scales such as census block groups could be used instead. Also, data could be aggregated to larger regions such as counties if fewer sectors were desired. Regardless of the specific meaning for sectors, in APEX the shape of sectors is irrelevant in the sense that the model only uses the central location each sector, determined by the latitude and longitude for some representative point.

In the *Simulation Control* file for an APEX run, the user specifies the area to be modeled by specifying the latitude and longitude of a central location for the study area, along with a radius (the **CityRadius** parameter). Optionally, the user may also provide a list of counties to be modeled. If present, this list further restricts the study area.

For each model run, APEX selects the sectors that meet the study area conditions in the following way. First, the sector location must be within the specified distance (radius) of the designated center of the study area. Second, if the user provided a specific list of counties (identified by their FIPS codes), then the sector must belong to one of these counties. This is achieved using the first five characters of the sector ID, which should contain the FIPS code for the county in which the sector is located. If no county list is provided, the initial study area is

roughly circular, consisting of all sectors with sector locations within the specified radius. The final study area consists of the subset of sectors in the initial study area for which air quality and meteorological data are available. This is discussed under the next two subsections (3.1.3 and 3.1.4).

One way to exert greater control over the selection of sectors is to edit the Census input files to eliminate any undesired sectors. However, the *Sector Location* file and the various *Population* files must all have the same set of sectors in them, so consistent editing is necessary. The *Sectors* and *Population* files provided with the current release of APEX4 contain data for all census tracts in the 50 states and D.C. from the 2000 Census.

The sectors are read in **SpaceTimeModule:ReadSiteLists**.

3.1.3 Air Quality Districts

The spatial units for ambient air quality data are called air quality districts. Ambient air quality data are provided as hourly time series at specific locations. These locations could be monitoring sites, or political units such as counties, or census units such as tracts, or receptor locations or grid points as used by some air quality models. As with sectors, each air quality district has a nominal central location consisting of a latitude and a longitude. The air quality district locations are stored in the *Air Quality District Location* input file. The user designates the maximum representative radius of the air quality districts as a modeling parameter called ***AirRadius***. In a given APEX run, all air quality districts have the same maximum representative radius.

The model checks each air quality district listed in the *Air Quality Data* input file to determine if the district has data covering the entire simulation period. Note that each air quality district may have a different period of operation (i.e., different start and/or stop dates), but there can be no missing data or gaps between the simulation start and stop dates. If the user is supplying monitoring data as inputs, for example, then any missing values within each monitoring period must be filled in. The monitoring period can exceed the simulation period for the model run because APEX extracts the portion of the input data that corresponds to the simulation period. If the monitoring period does not cover the entire simulation period, the air quality district is deleted in its entirety.

APEX calculates the distance from each sector location to each air quality district center, and assigns the sector to the nearest air quality district, provided it is within the maximum representative air quality radius. If there is no air quality district within range (that is, all air quality district centers are further than ***AirRadius*** from the sector center), the sector is deleted from the study area and is not modeled. It is possible and perhaps even likely that some air quality districts in the *Air Quality Data* input file will have no sectors assigned to them. Such air quality districts are not used. This feature allows the user to prepare an input file in the simplest manner, perhaps containing more air quality districts than are necessary. For example, one might prepare a single *Air Quality Data* input file for all air quality districts in the state of Texas. This same input file could then be run on a study area around Houston, or Dallas, or some other location in Texas, without having to alter the input file. In principle, although the file would be very large, a single nationwide *Air Quality Data* file could be prepared and used.

The air quality districts are read in from the input file in **SpaceTimeModule:ReadSiteLists**. The actual air quality is read from the *Air Quality Data* file in **SpaceTimeModule:ReadAirQuality**.

3.1.4 Meteorological Zones

Another spatial unit in APEX is the *meteorological zone*, which is the equivalent to air quality districts but for meteorological data. Most of the rules that apply to air quality districts also apply to meteorological zones. Each meteorological zone is associated with a central location (specified by latitude and longitude), a maximum representative radius given by **ZoneRadius**, a **Start Date**, and a **Stop Date**. The start and stop dates may differ for each meteorological zone, and must encompass the entire simulation period or else the meteorological zone is deleted. There can be no missing data between the start and stop dates of the simulation.

APEX calculates the distance from each sector location to each meteorological zone center, and assigns each sector to the nearest meteorological zone if within range (**ZoneRadius**), or deletes the sector otherwise.

The meteorological zone locations are read in from the *Meteorological Zone Location* input file in **SpaceTimeModule:ReadSiteLists**. The actual temperature data is read from the *Temperature Data* file in **SpaceTimeModule:ReadTemperatures**.

3.2 Determining the Final Study Area

3.2.1 Matching Sectors, Air Quality Districts, and Meteorological Zones

The APEX code for reading the locations of sectors, air quality districts, and meteorological zones, and for pairing the sectors to the nearest air quality districts and meteorological zones, is found in **SpaceTimeModule: SelectSites**.

The final study area consists of all the sectors within **CityRadius** of the study area central location, restricted to the listed counties (if provided), that have both an air quality district and a meteorological zone within range. Sectors for which a valid air quality district (one within **AirRadius**) or a valid meteorological zone (one within **ZoneRadius**) cannot be found are discarded from the final study area. The study area population is the total population in the input *Population* files that reside in these sectors.

The **SelectSites** subroutine makes use of the function **SpaceTimeModule: Distance** which calculates the distance between two points given their latitudes and longitudes. It is discussed below.

3.2.2 The Distance Algorithm

APEX uses a computational algorithm (implemented in **SpaceTimeModule:Distance**) to calculate the distances (e.g. study center to sector center, sector center to air quality district

center) required to determine the final study area. The method is accurate, simple in terms of program code, and works well everywhere on the globe. It calculates the distance between two points based on their latitudes and longitudes. It is based on projecting the points onto a **sphere**, rather than onto a plane, using the following steps:

- The latitude and longitude of the two points (locations) in question are identified
- The two sets of angles, (θ_1, ϕ_1) and (θ_2, ϕ_2) , subtended at the Earth's center by the radial vectors to the two points are calculated
- The net angle between these two radial vectors is found
- The Earth's radius at the average latitude of the two points is calculated
- The results from the previous 2 steps are multiplied to give the distance between the points, D

All angles are measured in radians. In step 1, the angles ϕ subtended by the radial vectors at the Earth's center are the same as the longitudes of the points in question. However, calculating the θ from latitude is more complicated since it is affected by the flattening of the poles. The intersection of the Earth's surface with a plane through the poles is an ellipse. Let the eccentricity of the ellipse be given by e . Latitude measures the angle between the polar axis and a locally horizontal surface such as sea level (a tangent surface to the Earth). For a point on an ellipse at an angle θ from the semimajor axis, the tangent line has slope s :

$$s = -(1 - e^2) \cot(\theta) \quad (3-1)$$

where the square of the eccentricity of the earth is $e^2 = 0.00672265$.

This slope is equal to the negative cotangent of the latitude. Hence

$$\theta = \tan^{-1}[(1 - e^2) \tan(\text{lat})] \quad (3-2)$$

When applied to both points, this gives angles θ_1 and θ_2 .

The radius of the Earth varies with latitude but not with longitude. At an angle θ relative to the semimajor axis, the distance from the center to a point on the ellipse is given by

$$R = A \sqrt{\frac{1 - e^2}{1 - e^2 \cos^2(\theta)}} \quad (3-3)$$

where A is the semimajor axis length, $A = 6378.388$. For purposes of the distance calculation, θ is set to the average of θ_1 and θ_2 .

For two points at (θ_1, ϕ_1) and (θ_2, ϕ_2) on a sphere of radius R , the arc length of the great circle connecting them, the distance D , is given by the product of the radius and the net angle between them:

$$D = R\cos^{-1}[\cos(\theta_1)\cos(\theta_2)\cos(\phi_1 - \phi_2) + \sin(\theta_1)\sin(\theta_2)] \quad (3-4)$$

which follows from the formula for the dot product of the radial vectors, expressed in spherical coordinates.

All of the above formulas are exact. The only approximation being made is in claiming that the arc of the Earth's surface between the two points lies exactly on a sphere. In most practical cases, the error resulting from this approximation is in the range of one to ten parts per million.

3.3 Modeling Commuting

APEX models commuting by assigning a work sector to each modeled individual based on commuting data for the individual's home sector from the 2000 Census. A single nationwide file of commuting data (the *Commuting* file) is supplied with APEX. Both the nationwide *Population Data* and *Commuting* input files use census tracts as the sectors. The *Population Data* files contain year 2000 tract-level U.S. Census counts, tract locations, and national employment probabilities by age. The *Commuting* file contain adult commuting patterns based on the 2000 Census. As part of step 2 (Figure 2-1), APEX can extract the flows for the selected home sectors from this large *Commuting* file. The development of this file is described below.

3.3.1 Nationwide Commuting Database for 2000

A national commuting database was generated from a set of US Census files listing the number of persons living in one tract and working in another. The original files, derived from the 2000 Census, are distributed by the US DOT Bureau of Transportation Statistics at their web site <http://transtats.bts.gov/>. The data used were collected as part of the Census Transportation Planning Package (CTPP). The files used are from CTPP Part 3-The Journey To Work files. They contain counts on individuals commuting from home to work locations at a number of geographic scales. Tract-to-tract data were used for the commuting databases.

One concern identified from these data was that some home-work pairs are very widely separated geographically. For example, some people live in Alabama but work in Alaska. This may be the case for either military personnel, or others who are stationed in remote workplaces for weeks or months at a time, but in APEX the need is for daily commuting flows and there is no way to determine from these data which workers commute on a daily basis. A preliminary analysis of the home-work counts showed that a graph of Log(flows) versus Log(distance) had a near-constant slope up to somewhere around 100 kilometers. Beyond 150 kilometers the slope is also fairly constant but flatter, meaning that flows were not as sensitive to distance. Between these two distances there is a smooth transition from one slope to the other. A simple interpretation of this result is that at distances below 100 km the vast majority of the flow was due to persons traveling back and forth daily, and the numbers of such persons decrease fairly rapidly with increasing distance. At large distances the majority of the flow are persons who stay at the workplace for extended times, in which case the separation distance is not as crucial in determining the size of the flow.

To apply the home-work data to commuting patterns in APEX, a simple rule was chosen. It was assumed that all persons in home-work flows up to 120 km are daily commuters, and no persons in more widely separated pairs commute daily. This meant that the list of destinations for each home tract can be restricted to only those work tracts that are within 120 km of the home. In practice, this cutoff has little impact in an APEX model run since persons who live and work more than 120 km apart are not likely to have both their home and work sectors inside the same study area. Such persons would be excluded from an APEX model run anyway, even if retained on the commuting database.

The resulting database contained a total of 64,958 distinct home sectors, and 65,075 work sectors, based on data from 117,792,172 persons. The home-work tract pairs were sorted by the home tract ID, and for each home tract the possible destinations were listed, one per line. The flows were converted to fractions of the home tract total, and then expressed as cumulative fractions since this is the form that will be needed by APEX. The work sectors were sorted by decreasing fraction of the home tract total, and the information was written to an ASCII text file. Every record in this file contains three variables: a tract ID, a flow fraction, and a distance. A convention was used that the flow fraction and distance were set to -1.0 to indicate a home tract. The first three records on the nationwide ASCII file are as follows:

```
01001020100 -1.00000 -1.0
01001020700 0.10412 5.5
01101000100 0.20097 19.6
```

The first record contains the ID of the first home tract by sort order, followed by two placeholder values. The second record contains ID for the first destination tract for the current home tract. The destination tracts are sorted in order of decreasing commuting fraction. The number 0.10412 indicates that the largest percentage of commuters of the commuters who live in this home tract (around 10.4%) commute to tract 01001020700. The third number on each line is the separation distance in kilometers between the home and work tracts. The third record shows the second destination tract for this same home tract, followed by a cumulative fraction of 0.20097. This means that about 9.7% of the workers in that home tract go to second work tract, despite the two being greater than 19 kilometers apart. Further examination of this file reveals that this particular home tract has 38 destination tracts to which workers commute. Note that fractions down to 0.00001 (one in one hundred thousand) are reported. Fractions that round to zero at this precision are deleted from the database.

The number of destinations per home tract is not constant. There are two ways to know when the last destination for a given home tract has been reached. First, the cumulative flow fraction for the last destination is always 1.00000. Second, the next record in the file has negative flow and distance indicators as placeholders, indicating that the record contains the ID of the next home tract. The mean number of associated work tracts per home tract is 79, with a minimum of 1 and a maximum (within 129 km) of 413. Overall, this file has over 5.2 million records and occupies 131 megabytes of disk space.

3.3.2 Implementation of Commuting in APEX

The APEX model only extracts the commuting data that pertains to the selected study area. For each sector in the study area (home sector) APEX reads in a list of possible work sectors and the cumulative probabilities associated with each. The cumulative probabilities range from 0 to 1; the work sectors having higher probabilities are associated with a larger “range” of this interval. For each worker (each profile with Employed=YES), a uniform random number R from zero to one is generated. This random number is used to select a corresponding work sector (the one that is associated with smallest cumulative probability that is $\geq R$) for the profile.

When a profile’s activity diary events are read from the *Diary Events* file, they are characterized as occurring in one of three places: “Work”, “Home” or “Other” based on the CHAD location code. For profiles who are commuters, all “Work” events will use the work sector’s air quality data when calculating microenvironmental concentrations. “Home” events will use the home sector data; “Other” events will use a average of the home and work sector data. Profiles who do not commute will always use the air quality data associated with the home sector.

It is likely that some profiles will commute to sectors outside of the final study area. The user may choose to include these profiles in the analysis or discard them by setting the *Simulation Control* file variable **KeepLeavers**. If KeepLeavers=YES, the air quality data for the work sector is unknown. Therefore, it is assumed to be related to the average concentration over all of the study area air quality districts at the same point in time. Calling this average C_{avg} , the ambient concentration C for the person is:

$$C = LeaverMult * C_{avg} + LeaverAdd \quad (3-5)$$

where **LeaverMult** and **LeaverAdd** are also set in the *Simulation Control* file. If KeepLeavers = N, then these individuals are not modeled.

CHAPTER 4. GENERATING SIMULATED INDIVIDUALS (PROFILES)

APEX stochastically generates a user-specified number of simulated persons to represent the population in the study area. Each simulated person is represented by a “personal profile.” The personal profile (see step 2 in Figure 2-1) is a set of parameters that describe the person being simulated. The simulated person has a specific age, a specific home sector, a specific work sector (or does not work), specific housing characteristics, specific physiological parameters, and so on.

The profile does not belong to any particular real person, instead it is a fictional or simulated person. A single profile does not have much meaning in isolation, but a collection of profiles represents a random sample drawn from the study area population. This means that statistical properties of the collection of profiles should reflect statistical properties of the real population in the study area.

APEX generates the simulated person or profile by probabilistically selecting values for a set of profile variables. The profile variables fall into four categories:

- Demographic variables, which are generated based on the census data;
- Residential variables, which are generated based on sets of user-defined distribution data;
- Physiological variables, which are generated based on age- and gender-specific distribution data; and
- Daily varying variables, which (in most cases) are based on distribution data that change daily during the simulation period.

The individual profile variables are given in Table 4-1. The profile variables do not depend on the results for any other profile, and in general do not depend on any results (diary selection, microenvironment concentrations, exposure, or dose) for the current profile. The exception is the person’s physical activity index (PAI), which is calculated using the activity diary.

At present, APEX does not allow the user to select which variables are part of the personal profile. If such an enhancement were included, the user would be able to assign (say) a family size to each profile using input files rather than by reprogramming the source code.

The process by which APEX generates the personal profile is illustrated in Figure 4-1. The demographic and residential variables are set in **ProfileModule:GenerateProfiles**, the physiological variables are generated in **ProfileModule:GeneratePhysiology**, and the daily-varying variables are set in **ProfileModule:GenerateDailyVars**.

The following subsections describe the different categories of profile variables in more detail.

Table 4-1. Profile Variables in APEX

<i>Variable Type</i>	<i>Profile Variable</i>	<i>Description</i>
Demographic variables	Index	Internal APEX profile index
	Gender	Male/Female
	Race	White, Black, Native American, Asian, and Other
	Age	Age (years)
	Home sector	Sector in which a simulated person lives
	Work sector	Sector in which a simulated person works
	Home District	Air quality district assigned to home sector
	Work District	Air quality district assigned to work sector
	Meteorological zone	Meteorological zone assigned to home sector
	Employment Status	Indicates employment outside home
Residential variables	Gas stove	Indicates presence of gas stove
	Gas pilot	Indicates presence of gas pilot light
	Home air conditioning	Indicates type of home ventilation/air conditioning system
	Car air conditioner	Indicates presence of air conditioning in the simulated person's car
Physiological variables	Blood volume	Blood volume of a simulated person (ml)
	Body Mass	Mass of simulated person (kg)
	Weight	Body weight of a simulated person (lbs)
	Height	Height of a simulated person (in)
	Resting metabolic rate	Resting metabolic activity rate (kcal/min)
	Body surface area	Surface area of the body (m ²)
	Maximum permitted MET value	Maximum metabolic activity level (multiple of resting metabolic rate) that can be obtained by the individual (dimensionless)
	Energy conversion factor	Oxygen uptake per unit of energy expended (liters/kcal)
	Lung CO diffusivity	Lung CO diffusivity parameter used in COHb calculation (ml/min/torr)

<i>Variable Type</i>	<i>Profile Variable</i>	<i>Description</i>
Physiological variables	Endogenous CO production rate #1	Endogenous (internally produced) CO production rate #1 (ml/min)
	Endogenous CO production rate #2	Endogenous CO production rate #2 (ml/min) used only for women between ages of 12 and 50 for half the menstrual cycle
	Hemoglobin altitude factor	Correction for blood hemoglobin density at high altitudes
	Recovery Time	Time to recover a maximum oxygen debt (hours)
	Ventilation slope	Slope term for MET to ventilation conversion
	Ventilation intercept	Intercept term for MET to ventilation conversion
	Ventilation residual	Residual term for MET to ventilation conversion
	Hemoglobin density in the blood	Amount of hemoglobin in the blood (g/ml)
	Normalized maximum oxygen consumption	Maximum rate of oxygen consumption by the individual, normalized to body mass (ml of oxygen/min/kg)
	Starting day of menstrual cycle	The day during the first 28 days of the simulation period that menstruation begins; used for calculating endogenous CO
Daily varying variables	Daily endogenous CO production rate	Daily endogenous CO production rate in the simulation period (ml/min)
	Diary Number	Index for the selected diary for the day
	First Event #	Index of the first event for the day in the composite activity diary
	Last Event #	Index of the last event for the day in the composite activity diary
	Residence window position	Daily residence window position (open or closed) during the simulation period
	Car window position	Daily car window position (open or closed) during the simulation period
	Daily average car speed category	Daily average car speed category during the simulation period
	Conditional variable # 1	Generic user-defined conditional variable # 1
	Conditional variable # 2	Generic user-defined conditional variable # 2

Conditional variable # 3	Generic user-defined conditional variable # 3
PAI	Daily physical activity index (MET)

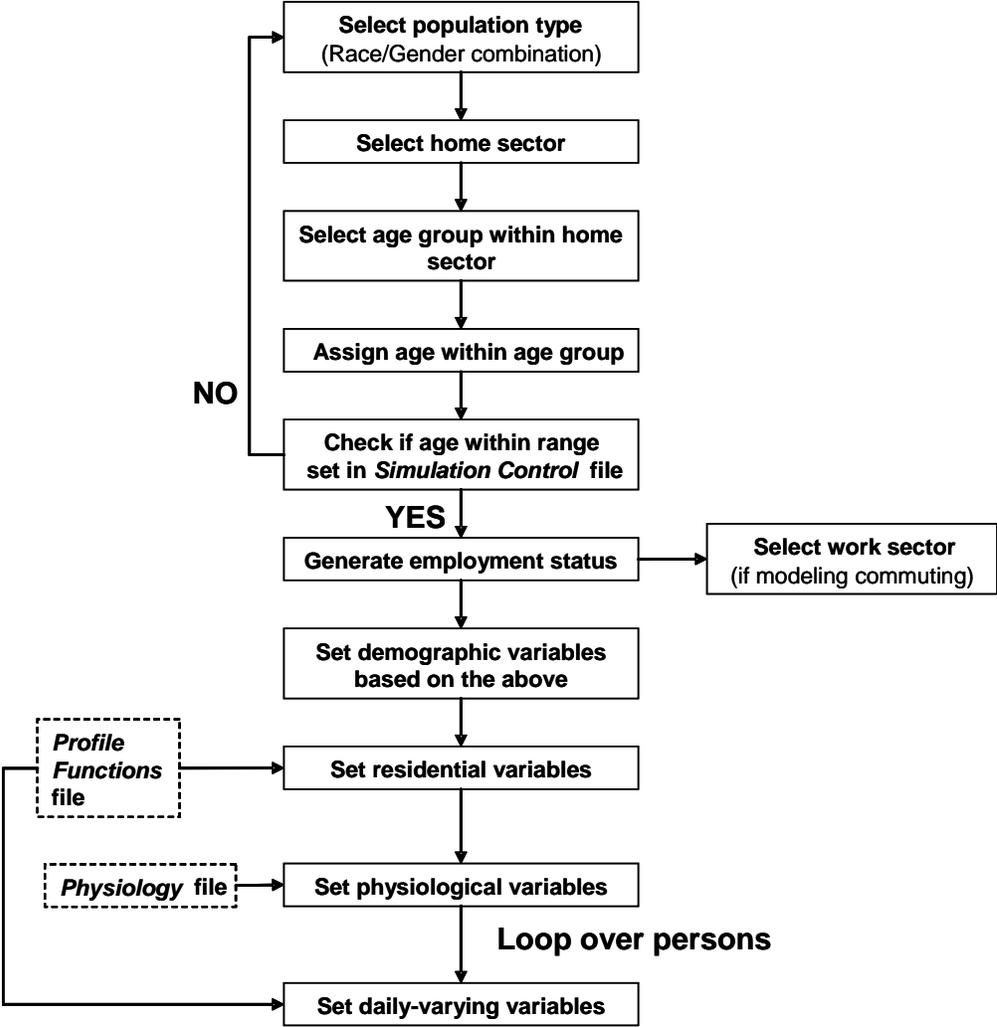


Figure 4-1. Generating a Simulated Profile

4.1 Demographic variables

The following are the profile variables of a demographic nature:

- **Age:** Age in years (integer)
- **Employed:** YES if employed outside home, NO otherwise

- **Gender:** Male or Female
- **HomeD:** Number of air quality district assigned to home sector
- **HomeSec:** Number of home sector for this profile
- **Race:** White, Black, Native American, Asian, Other
- **WorkD:** Number of air quality district assigned to work sector
- **WorkSec:** Number of work sector (if any)
- **Index:** Sequential number indexing the set of profiles
- **Zone:** Number of meteorological zone for home sector

The values of demographic variables (gender, age, etc.) for a simulated profile are selected probabilistically according to the following steps (see Figure 4-1):

- The fractions of people in each of the gender/race combinations (“population types”) in the final study area are calculated and then used as probabilities to randomly select a gender/race type for a simulated individual.
- The fractions of the selected population type in each sector within a study area are found and then used as probabilities to randomly select a home sector for the simulated person.
- The fractions of people in each age group in the selected population type in the selected sector are calculated and then used as probabilities to randomly select an age group for the simulated person.
- A specific age within the selected age group is randomly selected, assuming a uniform distribution.
- The employment probability for the selected age group (for the home sector) is used to randomly determine whether a simulated person will work.
- If the commuting option is used and a simulated person works, use the fractions of people commuting to each of the work sectors for the selected home sector to randomly select a work sector that a simulated person will commute to. If the commuting option is not used, assume a person who works does so in their home sector.

4.2 Residential Variables

The residential variables are set after the demographic variables described above. The residential variables are categorical variables that are used to indicate whether a residence or a car associated with a simulated person has a specified appliance or component that may affect exposure. The rules for assigning these four variables are specified by the user in the *Profile Functions (Distributions)* input file (see Volume I). The residential variables are:

- **AC_Home:** An integer indicating the type of home ventilation systems (e.g., central air, attic fan, window unit, no A/C).
- **AC_Car:** YES if has air conditioning in car, NO otherwise
- **HasGasStove:** YES if has gas stove in home, NO otherwise
- **HasGasPilot:** YES if has gas pilot for gas stove in home, NO otherwise

APEX randomly determines the result for the variable based on the probabilities specified in the input files. For example, suppose a user specifies probabilities of 0.3 for not having a car conditioner (AC_Car= NO) and 0.7 for having a car air conditioner (AC_Car=YES). APEX randomly generates a value in the range of 0 to 1, assuming a uniform distribution. If this value is larger than 0.3, the simulated person will own an air conditioner, otherwise not.

These variables may be used as conditional variables for calculating concentrations in microenvironments (see Chapter 6).

4.3 Physiological Profile Variables

The physiological variables are used for estimating ventilation, calculating dose (as described in Chapters 7 and 9) and classifying profiles in reporting results. This section covers the calculation of these variables. The profile variables relating to physiology are as follows:

- **Blood:** Volume of blood (milliliters)
- **BM:** Body mass (kilograms)
- **BSA:** Body surface area (m²)
- **Diff:** Lung CO diffusivity(ml/min/torr)
- **ECF:** Energy conversion factor (liters of oxygen per kcal)
- **Endgn1:** Endogenous CO production rate #1 (ml/min)
- **Endgn2:** Endogenous CO production rate #2 (ml/min)
- **Height:** Body height (inches)
- **Hemfac:** Hemoglobin altitude adjustment
- **Hmglob:** Hemoglobin density (grams per milliliter of blood)
- **METmax:** Maximum obtainable MET value (unitless)
- **MOXD:** Maximum obtainable oxygen debt (ml/kg body mass)

- **NVO2max:** Maximum normalized oxygen consumption (milliliter of oxygen per minute per unit body mass)
- **PAI:** Median daily physical activity index (MET)
- **RMR:** Resting metabolic rate (kcal/min)
- **RecTime:** Oxygen debt recovery time (hours)
- **Start:** Starting day (phase) for menstrual cycle (if applicable)
- **VeSlope:** Slope for MET to ventilation rate conversion
- **VeInter :** Intercept for MET to ventilation rate conversion
- **VeResid :** Residual for MET to ventilation rate conversion
- **Weight:** Body weight (pounds)

The physiological profile variables do not affect the exposure calculations for individuals in any way, as none of them affect either the selection of diaries or the concentrations in the various microenvironments. However, the physiology of a profile affects the ventilation calculations and thus influences (1) the calculation of dose (see Chapter 9) and (2) the calculation of exertion level, which is used to group exposure results in the output *Tables* file (see Volume I).

The physiological variables are calculated from input data. The *Physiology* input file contains the data that are used to set the physiological profile variables NVO2max, BM, RMR, Blood, Hmglob, Height, BSA, and MOXD. Specifically, the physiology file contains the following parameters for each age and gender cohort (see Volume I for more information):

- **NVO2MN and NVO2SD:** NVO2max mean and standard deviation in ml O₂/min/kg (Isaacs and Smith 2005)
- **BMMN and BMSD:** BM mean and standard deviation in kg (Isaacs and Smith 2005)
- **RMRS, RMRI, and RMRE:** Regression coefficients for RMR (slope, intercept, and error) as a function of BM in MJ/Day (Johnson et al., 2000, adapted from Schofield et al., 1985)
- **BLDF1 and BLDF2:** Blood volume factors for calculation of volume (ml) from height and weight (Johnson et al., 2002)
- **HGMN and HGDS:** Blood hemoglobin density (g/lm of blood) mean and standard deviation (Johnson et al., 2002)

Other parameters are defined within the APEX code:

- **HTSLP, HTINT, and HTSTD:** Regression coefficients for height in inches (slope, intercept, and error) as a function of age (children 0-17) or body mass (adults) (Johnson et al., 2000)
- **BSAEXP1 and BSAEXP2:** Exponents for calculating body surface area (m²) as a function of body mass (Burmater, 1998)
- **MOXDMN and MOXDSD:** Mean and standard deviation for maximum obtainable oxygen debt in ml per kg body weight (Isaacs et al., 2005)

The *Ventilation* input file contains data for a set of regression parameters used by APEX to estimate the ventilation-related profile variables *VeSlope*, *VeInter*, and *VeResid*. See Volume I for an example of the *Ventilation* file; see Graham and McCurdy (2005) for the derivation of these parameters. The file contains the following parameters for 5 age groups:

- **VEB0 and VEB0SE:** Mean and standard error for regression parameter b0
- **VEB1 and VEB1SE:** Mean and standard error for regression parameter b1
- **VEB2 and VEB2SE:** Mean and standard error for regression parameter b2
- **VEB3 and VEB3SE:** Mean and standard error for regression parameter b3
- **VEEB:** Interpersonal variance
- **VEEW:** Intrapersonal variance

Note: the standard error terms defined in the *Ventilation* file are not currently used by APEX, but could be used for future uncertainty analyses.

Once the above parameters are read/set by APEX, the physiological profile variables are formulated as follows in **ProfileModule:GeneratePhysiology** using the appropriate parameter values for the profile age and gender. First, 2 uniform random numbers Y_1 and Y_2 (between 0 and 1) and 11 random normal numbers Z_1 - Z_{12} (ranging from -4 to 4) are generated. Then the physiological profile variables are then calculated as follows (see above for the units of the variables in these equations):

$$NVO2max = NVO2MN + Z_1(NVO2SD) \quad (4-1)$$

$$BM = BMMN + Z_2(BMSD) \quad (4-2)$$

$$Weight = 2.2046 (BM) \quad (4-3)$$

Body surface area (Burmater 1998) is calculated as

$$BSA = e^{BSAEXP1} BM^{BSAEXP2} \quad (4-4)$$

Resting metabolic rate (Johnson et al., 2000) is given by

$$RMR = 0.166(RMRS)(BM) + RMRI + Z_3(RMRE) \quad (4-5)$$

where 0.166 is the conversion factor for converting kcal/min to MJ/day.

The maximum MET value an individual can obtain is given by

$$MET_{max} = \frac{(0.001)(BM)(NVO2_{max})}{ECF * RMR} \quad (4-6)$$

where ECF is the energy conversion factor in liters of oxygen per kcal (Johnson et al., 2000, adapted from Esmail et al., 1995),

$$ECF = 0.2 + (0.01)(Y_1) \quad (4-7)$$

where 0.001 is the conversion factor for ml to liters O₂. The lower bound for MET_{max} is 5, and the higher bound is 20; values outside of this range are set to the corresponding bound.

Recovery time (Isaacs et al., 2005) is estimated as

$$RecTime = 8 + 8Y_2 \quad (4-8)$$

(see Section 7.2 for a discussion of this equation).

For children under the age of 18, height (in inches) is a function of age:

$$Height = HTINT + age * HTSLP + Z_4(HTSTD) \quad (\text{children under 18}) \quad (4-9)$$

for adults, height (in inches) is a function of body weight:

$$Height = HTINT + \ln(\text{weight}) * HTSLP + Z_4(HTSTD) \quad (\text{adults 18 and older}) \quad (4-10)$$

Several physiological variables are calculated differently for males and females. These include lung CO diffusivity (ml/min/torr) and the endogenous CO production rates (ml/min) (Johnson et al., 2000). These variables are only used in the APEX CO dose algorithm.

$$Diff = 0.361(Height) - 0.232(Age) + 16.3 \quad (\text{males}) \quad (4-11)$$

$$Diff = 0.556(Height) - 0.115(Age) - 5.97 \quad (\text{females}) \quad (4-12)$$

$$Endgn1 = \frac{(0.473)(1.316)^{Z_5}}{60} \quad (\text{males}) \quad (4-13)$$

$$Endgn1 = \frac{(0.497)(1.459)^{Z_5}}{60} \quad (\text{females}) \quad (4-14)$$

$$Endgn2 = \frac{(0.311)(1.316)^{Z_5}}{60} \quad (\text{females}) \quad (4-15)$$

The variable *Endgn2* is only used for women between ages 12 and 50 inclusive, for half of the menstrual cycle.

The hemoglobin density for both genders is given by

$$Hmglob = HBMN + Z_6(HBSD) \quad (4-16)$$

Blood volume (Johnson et al., 2000) is calculated as:

$$Blood = BLDF1(Weight) + BLDF2(Height)^3 - 30 \quad (4-17)$$

For males, *VeInter* is calculated as

$$VeInter = Intterm - [VEB3] \quad (\text{males}) \quad (4-18)$$

and for females

$$VeInter = Intterm + [VEB3] \quad (\text{females}) \quad (4-19)$$

where

$$Intterm = VEB0 + Z_7(VEB0SE) + Z_8(VEEB) + [VEB2][\ln(1 + Age)] \quad (4-20)$$

For both genders

$$VeSlope = VEB1 \quad (4-21)$$

$$VeResid = VEEW \quad (4-22)$$

The variables *VeSlope*, *VeInter*, and *VeResid* are used in the APEX ventilation algorithm (see Chapter 7 and Graham and McCurdy, 2005).

Finally, maximum oxygen deficit (*MOXD*) is calculated as

$$MOXD = MOXDMN + Z_{12}(MOXDSD)$$

MOXD is used in the adjustment of METS values; see section 7.2.

4.4 Daily-Varying Variables

The daily varying variables are generated for each day in the model simulation for each profile in **ProfileModule:GenerateDailyVars**. There are eight daily varying profile variables:

- **Conditional1** User-defined conditional variable #1
- **Conditional2** User-defined conditional variable #2

- **Conditional3** User-defined conditional variable #3
- **Endgn** Endogenous CO production rate on given day (ml/min)
- **PAI** Daily physical activity index (MET)
- **SpeedCat** Category for average vehicle speed on given day
- **WindowRes** Residence window status (open or closed) for given day
- **WindowCar** Car window status (open or closed) for given day

The rules for defining WindowRes, WindowCar, SpeedCat, Conditional1, Conditional2, and Conditional3 are provided by the user in the *Profile Functions (Distributions)* input file. These variables may be used as conditional variables for use in calculating the concentrations in microenvironments. The *Profile Functions* file and conditional variables are covered in detail in Volume I. Conditional variables are also explained further in the Microenvironments chapter (Chapter 6) of this Volume.

The variable Endgn is used in the evaluation of the blood COHb level. Even though it is stored in an array of daily values, for males it always has the same value from day to day, that is, it is always set to the physiological profile variable Endgn1. For females it may have one of two values (the physiological profile variables Endgn1 and Endgn2) depending on the phase of the menstrual cycle.

The variable PAI is calculated as the time-averaged MET value for the entire simulation day. As it depends on the daily activity diaries, it is not set in the profile module, but rather later, in the ventilation subroutine **ExposureDoseModule:Ventilation**.

CHAPTER 5. CONSTRUCTING A SEQUENCE OF DIARY EVENTS

APEX probabilistically creates a composite diary for each of the simulated persons by selecting a 24-hour diary record—or diary day—from an activity database for each day of the simulation period. The Consolidated Human Activity Database (CHAD) has been supplied with APEX for this purpose. A composite diary is a sequence of events that simulate the movement of a modeled person through geographical locations and microenvironments during the simulation period. Each event is defined by geographic location, start time, duration, microenvironment visited, and activity performed.

The APEX model generates sets of exposure time series, one for each simulated individual, and both mean exposures over time and variation in exposures are important. The ability to realistically reproduce these exposure metrics depends on the method used to construct the composite activity diaries for the simulated population. APEX provides two methods of assembling composite diaries. The first (basic) method, which is adequate for estimating mean exposures, simply involves randomly selecting an appropriate activity diary for the simulated individual from the available diary pool. The second method is a more complex algorithm for assembling longitudinal diaries that realistically simulates day-to-day (within-person) and between-person variation in activity patterns (and thus exposures). Both methods are covered in this chapter.

As both methods of composite diary assembly require the creation of diary pools, their construction is covered first.

5.1 Constructing the Diary Pool

5.1.1 Diary Data

The composite diary is created by concatenating individual one-day activity diaries from the CHAD database. APEX currently provides this database as two files: a file containing personal information of the studied individual, and one containing the actual diary events (see Volume I for more information). The *Personal Info (Diarysum)* file contains the following variables, in this order, as comma-separated values:

- CHAD ID
- Day of the week (e.g., Monday)
- Gender (M/F)
- Race
- Status of employment (Y/N)

- Age (years)
- Maximum hourly temperature on day of study (°F)
- Average temperature on day of study (°F)
- Occupation
- Count of missing time (when activity and/or location codes are missing from the activity file)
- Number of events

The *Diary Events* file contains the following variables as comma-separated values:

- CHAD ID
- Start time (of the event)
- Duration (minutes)
- Activity code
- Location code

See Volume I for a description of the CHAD activity and location codes. The events file contains a record for each of the events indicated by the number of events in the personal information file. Note that while CHAD data are provided with APEX, other activity data could be used instead, as long as the input file formats are followed and the CHAD coding conventions are used.

The APEX diary input files are read by **DiaryModule:ReadDiaries**.

5.1.2 Grouping the Available Diaries into the Diary Pools

A diary pool is a group of CHAD diaries, appropriate for a given simulation day, from which a daily diary may be drawn. The criteria for creation of the Diary Pools are defined using the *DiaryPool* variable in the *Profile Functions (Distributions)* input file (see Volume I). Briefly, the user can define different pools for different combinations of ranges of maximum temperature, average temperature, and day of the week. Thus, the definition of a diary pool for a single (hypothetical) simulated day may be something like “all CHAD activity diaries for a weekend day for which the maximum temperature was between 70 and 80 degrees, and the average temperature was between 50 and 80 degrees.” The idea behind this logic is that temperature and day of the week affect the type of activities people perform, and thus it is important to match these real properties of the activity diaries to corresponding simulated days. It should be noted that in APEX, CHAD diaries that are missing temperature data are thrown out (ie. not assigned to any diary pool.)

The number of diary pools that are defined affects the number of diaries that available for selection on a given day. Therefore, it is important not to define the pools too narrowly, as it could result in the same activity diaries being selected over and over again.

The diary pools are created in **DiaryModule:ReadDiaries**.

5.2 Basic (Random) Composite Diary Construction

Basic (random) composite diary construction is implemented in **DiaryModule:CompositeDiary**. In basic composite diary construction, APEX develops a composite diary for each of the simulated individuals (profiles) in the following manner:

Once the pools diary have been created (based on temperature and day of the week as described above), a selection probability for each diary within the pool is calculated based on age/gender/employment similarity of the simulated person to the “real” diaries. The probabilities are calculated in **DiaryModule:DairyProbabilities**. The selection probability is actually a product of three probabilities between 0 and 1, one each for age, gender, and employment. The gender and employment probabilities are straightforward: if the gender or the employment status of the diary matches that of the profile, then the probability for these factors is set to 1. If they do not match, the probability is set to 0. The exception is for the employment probability for children under 16. Since APEX does not model employment status for children under sixteen (the employment profile variable will always be 0), then the employment probability is always set to 1 for this age group. This prevents APEX from discarding the CHAD activity diaries for children under age 16 that had an employment status=YES.

The age selection probability is a bit more complicated. APEX provides the user with the option of using activity diaries that have an age close to that of the simulated profile, although it may not match exactly. This range is controlled by the *Simulation Control* file setting **AgeCut2Pct** (see Volume I). Ages in this range will be given a probability of 1. In addition, APEX allows for the use of “shoulder ages,” which are the age ranges (of width **AgeCutPct**) above and below the main age window. These ages are given reduced probability equal to the value of the *Simulation Control* file setting **Age2Prob**.

If the employment status, gender, or age for an activity diary is missing, then the selection probability for that variable is determined directly from the *Simulation Control* file variables **MissEmpl**, **MissGender**, and **MissAge**, respectively.

The final selection probability for each diary is the product of the age, gender, and employment selection probabilities. Then, on each day of the simulation period, APEX randomly selects a diary day from the appropriate diary pool, based on selection probability value.

5.3 Longitudinal Activity Diary Assembly

The second method of multi-day diary construction in APEX, which is required for characterizing within-person and between-person exposure variability, is a longitudinal diary assembly algorithm that constructs multi-day diaries based on reproducing realistic variation in a

user-selected key diary variable. The variable may reflect any diary property, and is provided to APEX in the *Diary Statistics* input file. It is assumed that the key variable has a dominant influence on exposure. The APEX4 release provides *Dairy Statistics* files for outdoor time and vehicle time, which were constructed by summing the total time associated with “outdoor” and “vehicle” CHAD location codes for each diary (see Volume I). For some scenarios, the key variable might be travel time or time performing a particular activity. The key variable could also be a composite formed from several different variables, for example, a weighted average of diary variables. The necessary condition for implementing the method is that every single-day diary be assigned a numeric value for this key variable. This allows the set of available diaries in every diary pool to be ranked in terms of this key variable, from lowest to highest. The method uses this key variable to preferentially select appropriate diaries from the available pool on the different days in order to produce a final longitudinal activity diary that has specific statistical properties. The method is primarily contained within **DiaryModule:DiaryRanks**, which is called from **DairyModule:DiaryProbabilities**.

The longitudinal diary construction method targets two statistics, **D** and **A**. The **D** statistic reflects the relative importance of within-person variance and between-person variance in the key variable. The **A** statistic quantifies the lag-one (day-to-day) variable autocorrelation, which characterizes the similarity in diaries from day to day. Desired **D** and **A** values for the key variable are selected by the user and set in the *Simulation Control* file, and the algorithm constructs a longitudinal diary that preserves these parameters. See Section 5.3.2 for guidance on selecting appropriate **D** and **A** values for a particular simulation.

5.3.1 The Longitudinal Diary Assembly Algorithm

The longitudinal diary selection method is based on the scaled rank, or “x-score” for the key variable for each diary. The x-scores are calculated within diary pools. First, a pool is sorted from lowest to highest on the key variable and given a corresponding rank, **R**. If there are **K** diaries in a pool, and each diary has equal statistical weight then the x-score for the diary at rank **R** is

$$x = \frac{\left(R - \frac{1}{2}\right)}{K} \tag{5-1}$$

If the diaries have unequal statistical weight, then the x-scores will not be evenly spaced from 0 to 1 (as some diaries will correspond to a greater “interval” on the 0 to 1 scale). In APEX, eq 5-1 is not used, but rather the x-scores are assigned to each diary by sorting the diary pool on the key statistic, and then applying the age, gender, and employment probabilities as described in Section 5.2. The diaries are then assigned to days in the simulation based on their x-scores by the algorithm described below.

An overview of the longitudinal diary method is shown in Figure 5-1. For each simulated person, the following steps are performed:

1. An individual target x-score T_i is selected from a beta distribution (β_1) that depends on the value of **D**.

2. For each day in the simulation, a daily scaled x-score (scaled rank) is generated. It is picked from a different beta distribution (β_2) having a peak near T_i .
3. An individual target correlation A_i is sampled from a beta distribution (β_3) having a peak near the population autocorrelation A .
4. The independently sampled daily x-score values are re-ordered to induce the target autocorrelation A_i .
5. Diaries are assigned from the diary pool according to the final time-series of daily x-score values.

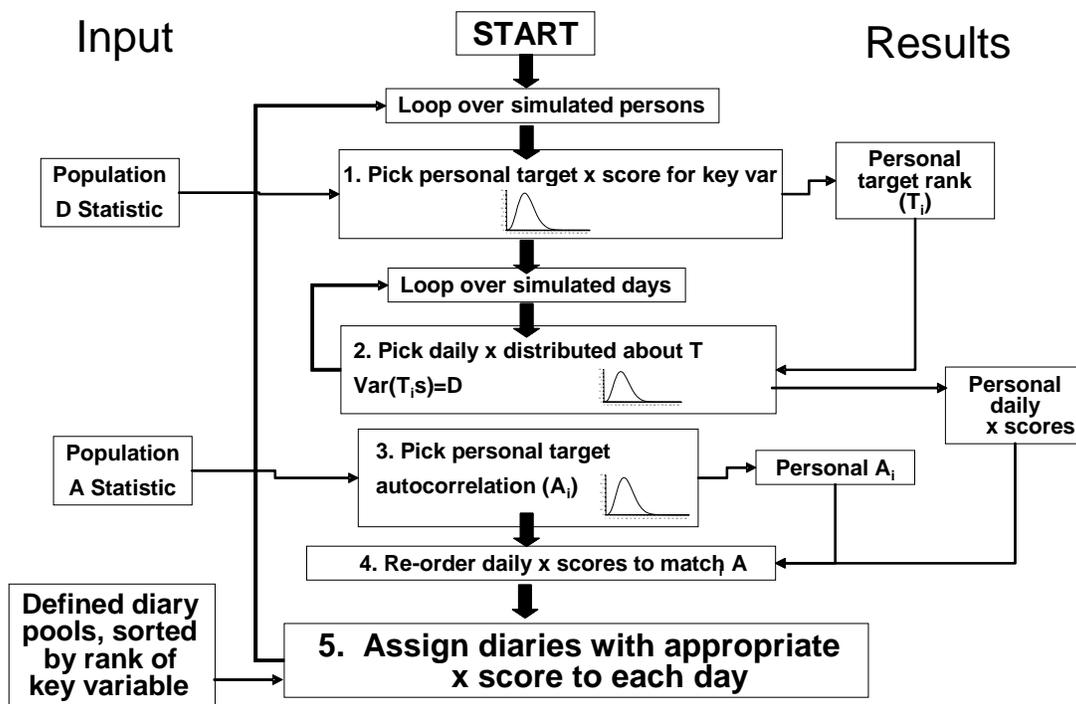


Figure 5-1. Overview of the Longitudinal Diary Assembly Algorithm

All of the random number generation in the new method involves drawing numbers from Beta distributions. All of the random number distributions are bounded both above and below, which is a natural property of the Beta distribution. Given these fixed end points, the Beta distribution has two shape parameters which allow a great variety of forms. Both shape parameters (for all the distributions) are positive. The means and shape parameters for each of the Beta distributions were formulated to 1) properly reproduce D for the population, while 2) producing unbiased x-scores across the population. The resulting equations for the parameters are given below. See Glen and Smith (2005) for the derivation of these equations. Each of the above steps of the algorithm is described in detail below:

1. An individual target x-score T_i is selected from a beta distribution (β_1) that depends on the value of D . The distribution of T_i depends on the value of D . The β_1 distributions for T_i are symmetric about their midpoint, so the distribution shape parameters are equal. They are equal to α , where

$$\alpha = 1 - 0.08(4\sqrt{D}(1 - \sqrt{D}))^3 \quad (5-2)$$

The mean of the distribution, μ , is equal to 0.05. The bounds of β_1 are at $(1/2 - w_1/2)$ and $(1/2 + w_1/2)$, where w_1 is a function of D and α :

$$w_1 = \sqrt{\frac{D(1 + 2\alpha)}{3}} \quad (5-3)$$

Thus the final T_i for the profile is generated as:

$$T_i = 0.5 + w_1(\beta(\alpha, \alpha) - 0.5) \quad (5-4)$$

2. For each day in the simulation, a daily x-score is generated. To generate daily scores, a beta distribution (β_2) dependent on D with a peak near the target value T_i is constructed. Since each individual has a personal value of T_i , each will have a unique β_2 . As D approaches zero, β_2 flattens into a uniform distribution. As D approaches one, β_2 narrows to a spike at T_i . One x value is selected randomly from the PDF for each day in the simulation, plus a few extra (15 extra is sufficient for a one-year simulation). Since the β_2 for two individuals differ, the between-person variance does not go to zero as the number of draws becomes large. The shape parameters a and b for β_2 are a function of T_i and D :

$$a = \frac{2T_i}{(1-D)} \quad (5-5)$$

$$b = \frac{2(1-T_i)}{(1-D)} \quad (5-6)$$

Thus for each day in the simulation, an x-score is generated as

$$x = \beta_2 = \beta(a, b) \quad (5-7)$$

3. An individual target correlation A_i is sampled from a different beta distribution (β_3) having a peak near the population autocorrelation A . The width of this distribution is w_2 :

$$w_2 = \min(2 - 2|A|, 1) \quad (5-8)$$

The personal target for A , A_i , is then generated as:

$$A_i = A + w_2(\beta(2.65, 2.625) - 0.5) \quad (5-9)$$

4. The independently sampled daily x-scores are re-ordered to induce the target autocorrelation A_i . This is done with a single pass, from first simulation day to the last. The reordering process involves selecting each x-score in the time series from another beta

distribution (β_4) that is a function of both the individual autocorrelation target A_i and the previous x-score. The “extra” diaries come into play here; they allow the avoidance of undesirable forced selections. The shape parameters c and d for β_4 for day j are:

$$c = s \left(\frac{1 - A_i}{2} + A_i x_{j-1} \right) \quad (5-10)$$

$$d = s \left(\frac{1 + A_i}{2} - A_i x_{j-1} \right) \quad (5-11)$$

where

$$s = \frac{2}{(1 - A_i^2)} \quad (5-12)$$

and x_{j-1} is the previous day’s x-score. The x-score for the first day is picked at random from a uniform distribution ranging from 0 to 1. Then, for day j , the x-score is selected as:

$$x_j = \beta(c, d) \quad (5-13)$$

The APEX code for performing this process keeps track of which x-scores are picked. If the same score is selected more than once, then the algorithm finds the closest unused score. The process laid out by equations 5-10 through 5-13 continues until x-scores for all simulation days are selected.

On very short time series (less than 30 days), the autocorrelation step has a slight effect on the resulting D for the population (a few percent increase).

5. Assign the selected x-score (scaled rank) values to each day in the simulation, and assign corresponding diaries from the diary pool. The result of steps 1-4 is a time series of x-score values mapped to simulation days, for example,

Jan 1	Jan 2	Jan 3
0.148	0.372	0.324

The diary pool has already been defined by APEX (typically by factors including age, gender, employment, daytype, and season, and perhaps others, see Section 5.1). The pool is then sorted into rank order from lowest to highest score for the key variable, and sort order is mapped onto a corresponding x-score. The x-score reflects the behavior of an individual relative to their peer group (for example, a person with score 0.75 is above 75% of the people in the same cohort and pool, in terms of the key variable). Scores can be moved across diary pools, whereas absolute values for the key variable might not. Thus, there might be a diary with six hours of outdoor time in the Sunday pool, but no such diary in the Monday pool. But a score of 0.75 exists on all days. The use of scores also helps in ensuring that all the available diaries are collectively sampled with the correct frequency. Note that the use of scores does not destroy information. All that matters in terms of diary assembly is the ability to specify which diary should be used on a given simulation day. For this purpose, requesting the available diary nearest to score 0.38 is

no different than requesting the available diary nearest to (for example) 73 minutes of outdoor time.

APEX assigns the diary whose x-score is closest to the daily x-score value to the day. No distinction is made or needed between daytypes, seasons, etc., because that is already taken into account. Note that any diary matching criteria such as daytype, season, temperature, rainfall, workday, holiday, etc., affect the list of diaries that belong to the pool for a given day, but have no effect on the x-scores.

5.3.2 Selecting Appropriate D and A Values For a Simulated Population

The statistic D for a population of individuals is given by

$$D = \sigma_b^2 / (\sigma_b^2 + \sigma_w^2) \quad (5-14)$$

where σ_b^2 and σ_w^2 are the between- and within- person variances in the key variable. Since both variances are non-negative, it is clear that D is in the interval $[0,1]$. $D=0$ means that σ_b^2 is zero, or that each person has the same mean score. A small D means that σ_b^2 is substantially smaller than σ_w^2 , indicating that the overall variability between people in the key diary statistic is smaller than the variability observed over days within the same person. A D near one means that σ_b^2 is much larger than σ_w^2 , or that each person shows little variation over time relative to the variability between persons.

The lag-one autocorrelation A is simpler to calculate than D , because each time series can be examined independently. The first step is to determine the x-score for each day, relative to the entire time series. If there are J days in the time series, and a given day is at rank R in terms of the rank for the key variable among the J days, then the x-score for that day is $(R-1/2) / J$. The overall mean and variance in these scores for the time series is then calculated. Due to the properties of the discrete uniform distribution of the scores (neglecting tied scores), the mean must be $1/2$ and the variance is

$$\sigma^2 = \frac{1}{12} \left(1 - \frac{1}{J^2}\right) \quad (5-15)$$

which is very close to $1/12$ for large J . The lag-one covariance is calculated by

$$COV = \frac{1}{J} \sum \left(x(j) - \frac{1}{2} \right) \left(x(j+1) - \frac{1}{2} \right) \quad (5-16)$$

where $x(j)$ is the x-score on day j (see for example, Box et al., 1994). The lag-one autocorrelation for the individual time series is given by the ratio of the covariance to the variance:

$$A_i = \frac{\sigma^2}{COV} \quad (5-17)$$

This calculation is repeated for each time series, and the statistic A is the mean of these individual autocorrelations. The statistic A has a range from -1 to +1, with positive values

indicating that each day has a tendency to resemble the day before. Random selection of diaries from day to day produces *A* values near zero. Negative *A* values imply dissimilarity between consecutive days.

A study of children conducted in Southern California (Xue et al., 2004) provided about 60 days of data on each of 163 children. The time series are not continuous, as the monitoring consisted of twelve six-day periods, one per month over a year. Furthermore, only about 40 children were measured simultaneously, as the other children were sampled in different weeks. However, a sample size of 40 is sufficient to calculate reliable rankings across persons. The number of consecutive day pairs was substantially less than the number of days, due to the gaps in the time series. However, *D* and *A* statistics were calculated for three variables directly recorded on the activity diaries (outdoor time, travel time, and indoor time), and also for a fourth variable, the physical activity index or PAI (McCurdy, 2000). The analyses were performed for all children together and for two gender cohorts. The separation into two cohorts reduces the number of children measured simultaneously to fewer than 20. Further division into more cohorts is therefore not practical, as the reliability of the scores would become very uncertain. The results for these analyses are given in Table 5-1.

Table 5-1. D and A Statistics Derived from the Southern California Children’s Study

Variable	Group	<i>D</i>	<i>A</i>
Outdoor time	all	0.19	0.22
Outdoor time	boys	0.21	0.21
Outdoor time	girls	0.15	0.24
Travel time	all	0.18	0.07
Travel time	boys	0.18	0.05
Travel time	girls	0.18	0.08
Indoor time	all	0.17	0.22
Indoor time	boys	0.21	0.2
Indoor time	girls	0.17	0.24
PAI	all	0.16	0.23
PAI	boys	0.16	0.2
PAI	girls	0.16	0.25

For all variables and each group, the standard deviation between persons for autocorrelation was about 0.20, and the standard error in the mean *A* was about 0.02. The values in Table 5-1 indicates that gender differences for both *D* and *A* are small, if present at all. The variance in *A* over the population was also examined for the four diary variables. While the absolute values of *A* were different across variables, it was found the variance in individual autocorrelations was very similar (approximately 0.2) in all variables. This variance was used to derive the parameters for the target *A* distribution (eq 5-9) in the APEX algorithm, and thus the method returns diaries that reproduce this level of variance in the daily autocorrelation, no matter what diary variable is modeled or what absolute *A* value is used.

CHAPTER 6. CALCULATING POLLUTANT CONCENTRATIONS IN MICROENVIRONMENTS

APEX calculates hourly concentrations of the modeled air pollutant in all microenvironments at each hour of the simulation period for each of the simulated individuals. The microenvironmental concentrations are set in `MicroEnvModule:MicroConcs`. The input files and algorithms for these calculations are described in the following sections.

6.1 Defining Microenvironments

APEX gives the user great flexibility in defining the number and properties of the microenvironments (see step 4 in Figure 2-1). (Note that the term microenvironment is generally shortened to micro in the computer code and files.) Along with this flexibility, however, is the need for the user to specify a substantial amount of information about the microenvironments in the input files.

There are three input files that relate to microenvironments. The first is the *Microenvironment Mapping* file, which contains the mapping from the location categories used in the activity diaries to the APEX microenvironments. The second is the *Microenvironment Descriptions* file, which contains rules for calculating pollutant concentrations in each microenvironment. The third file is the *Profile Functions (Distributions)* file, in which profile (person) variables (such as the presence of air conditioning or a gas stove in the home) influencing the microenvironmental concentrations can be defined. See Volume I for a discussion of the *Profile Functions (Distributions)* file.

The *Microenvironment Mapping* file gives the user control over how many microenvironments will be modeled and what CHAD (or other activity database) locations should be grouped into each of microenvironment. The file contains one row for each CHAD location code, indicating which APEX microenvironment is to be used whenever that CHAD code is encountered. Thus, the more than 100 location codes defined in the activity (CHAD) database is mapped into a smaller subset of user-defined microenvironments amenable to modeling. Table 6-1 lists the 115 CHAD location codes and the microenvironment to which each is assigned in the Microenvironment Mapping file included with the APEX4 release.

Table 6-1. Example Mapping of CHAD Location Codes to APEX Microenvironments

CHAD Location Code	CHAD Location Description	APEX Microenv. Code	APEX Microenvironment Description
U	Uncertain of correct code	-1	Use previous microenvironment
X	No data	-1	Use previous microenvironment
30000	Residence, general	1	Indoors – Residence
30010	Your residence	1	Indoors – Residence
30020	Other residence	1	Indoors – Residence

30100	Residence, indoor	1	Indoors – Residence
30120	Your residence, indoor	1	Indoors – Residence
30121	..., kitchen	1	Indoors – Residence
30122	..., living room or family room	1	Indoors – Residence
30123	..., dining room	1	Indoors – Residence
30124	..., bathroom	1	Indoors – Residence
30125	..., bedroom	1	Indoors – Residence
30126	..., study or office	1	Indoors – Residence
30127	..., basement	1	Indoors – Residence
30128	..., utility or laundry room	1	Indoors – Residence
30129	..., other indoor	1	Indoors – Residence
30130	Other residence, indoor	1	Indoors – Residence
30131	..., kitchen	1	Indoors – Residence
30132	..., living room or family room	1	Indoors – Residence
30133	..., dining room	1	Indoors – Residence
30134	..., bathroom	1	Indoors – Residence
30135	..., bedroom	1	Indoors – Residence
30136	..., study or office	1	Indoors – Residence
30137	..., basement	1	Indoors – Residence
30138	..., utility or laundry room	1	Indoors – Residence
30139	..., other indoor	1	Indoors – Residence
30200	Residence, outdoor	10	Outdoors – Other
30210	Your residence, outdoor	10	Outdoors – Other
30211	..., pool or spa	10	Outdoors – Other
30219	..., other outdoor	10	Outdoors – Other
30220	Other residence, outdoor	10	Outdoors – Other
30221	..., pool or spa	10	Outdoors – Other
30229	..., other outdoor	10	Outdoors – Other
30300	Residential garage or carport	7	Indoors – Other
30310	..., indoor	7	Indoors – Other
30320	..., outdoor	10	Outdoors – Other
30330	Your garage or carport	1	Indoors – Residence
30331	..., indoor	1	Indoors – Residence
30332	..., outdoor	10	Outdoors – Other
30340	Other residential garage or carport	1	Indoors – Residence
30341	..., indoor	1	Indoors – Residence
30342	..., outdoor	10	Outdoors – Other
30400	Residence, none of the above	1	Indoors – Residence
31000	Travel, general	11	InVehicle – Cars and Trucks
31100	Motorized travel	11	InVehicle – Cars and Trucks
31110	Car	11	InVehicle – Cars and Trucks
31120	Truck	11	InVehicle – Cars and Trucks
31121	Truck (pickup or van)	11	InVehicle – Cars and Trucks
31122	Truck (not pickup or van)	11	InVehicle – Cars and Trucks
31130	Motorcycle or moped	8	Outdoors – Near Road

31140	Bus	12	InVehicle – Mass Transit
31150	Train or subway	12	InVehicle – Mass Transit
31160	Airplane	0	Zero concentration
31170	Boat	10	Outdoors – Other
31171	Boat, motorized	10	Outdoors – Other
31172	Boat, other	10	Outdoors – Other
31200	Non-motorized travel	10	Outdoors – Other
31210	Walk	10	Outdoors – Other
31220	Bicycle or inline skates/skateboard	10	Outdoors – Other
31230	In stroller or carried by adult	10	Outdoors – Other
31300	Waiting for travel	10	Outdoors – Other
31310	..., bus or train stop	8	Outdoors – Near Road
31320	..., indoors	7	Indoors – Other
31900	Travel, other	11	InVehicle – Cars and Trucks
31910	..., other vehicle	11	InVehicle – Cars and Trucks
32000	Non-residence indoor, general	7	Indoors – Other
32100	Office building/ bank/ post office	5	Indoors – Office
32200	Industrial/ factory/ warehouse	5	Indoors – Office
32300	Grocery store/ convenience store	6	Indoors – Shopping
32400	Shopping mall/ non-grocery store	6	Indoors – Shopping
32500	Bar/ night club/ bowling alley	2	Indoors – Bars and Restaurants
32510	Bar or night club	2	Indoors – Bars and Restaurants
32520	Bowling alley	2	Indoors – Bars and Restaurants
32600	Repair shop	7	Indoors – Other
32610	Auto repair shop/ gas station	7	Indoors – Other
32620	Other repair shop	7	Indoors – Other
32700	Indoor gym /health club	7	Indoors – Other
32800	Childcare facility	4	Indoors – Day Care Centers
32810	..., house	1	Indoors – Residence
32820	..., commercial	4	Indoors – Day Care Centers
32900	Large public building	7	Indoors – Other
32910	Auditorium/ arena/ concert hall	7	Indoors – Other
32920	Library/ courtroom/ museum/ theater	7	Indoors – Other
33100	Laundromat	7	Indoors – Other
33200	Hospital/ medical care facility	7	Indoors – Other
33300	Barber/ hair dresser/ beauty parlor	7	Indoors – Other
33400	Indoors, moving among locations	7	Indoors – Other
33500	School	3	Indoors – Schools
33600	Restaurant	2	Indoors – Bars and Restaurants
33700	Church	7	Indoors – Other
33800	Hotel/ motel	7	Indoors – Other
33900	Dry cleaners	7	Indoors – Other
34100	Indoor parking garage	7	Indoors – Other

34200	Laboratory	7	Indoors – Other
34300	Indoor, none of the above	7	Indoors – Other
35000	Non-residence outdoor, general	10	Outdoors – Other
35100	Sidewalk, street	8	Outdoors – Near Road
35110	Within 10 yards of street	8	Outdoors – Near Road
35200	Outdoor public parking lot /garage	9	Outdoors – Public Garage / Parking
35210	..., public garage	9	Outdoors – Public Garage / Parking
35220	..., parking lot	9	Outdoors – Public Garage / Parking
35300	Service station/ gas station	10	Outdoors – Other
35400	Construction site	10	Outdoors – Other
35500	Amusement park	10	Outdoors – Other
35600	Playground	10	Outdoors – Other
35610	..., school grounds	10	Outdoors – Other
35620	..., public or park	10	Outdoors – Other
35700	Stadium or amphitheater	10	Outdoors – Other
35800	Park/ golf course	10	Outdoors – Other
35810	Park	10	Outdoors – Other
35820	Golf course	10	Outdoors – Other
35900	Pool/ river/ lake	10	Outdoors – Other
36100	Outdoor restaurant/ picnic	10	Outdoors – Other
36200	Farm	10	Outdoors – Other
36300	Outdoor, none of the above	10	Outdoors – Other

All of the other properties of the microenvironments are provided in the *Microenvironment Descriptions* file. All microenvironments assigned locations in the *Microenvironment Mapping* file must be defined in the *Microenvironment Descriptions* file. More microenvironments may be described than are assigned locations, but they will not be used by APEX (since in this case simulated people will never enter the microenvironment). The total number of microenvironments described in the *Microenvironment Descriptions* file must also be indicated in the *Simulation Control* input file. (These input files are also covered in Volume I.)

Definition of the microenvironments using the *Microenvironment Descriptions* file is covered in Section 6.2.3.

6.2 Calculating Concentrations in Microenvironments

APEX calculates hourly concentrations of the air pollutant in all the microenvironments at each hour of the simulation period for each of the simulated individuals, based on the hourly ambient air quality data specific to the geographic locations visited by the individual. APEX provides two methods for calculating microenvironmental concentrations: the mass balance (MASSBAL) method and the simpler factors (FACTORS) method. The MASSBAL method starts with the previous hour's concentration in each microenvironment, which is modified over time by exchange with the ambient air. The FACTORS method uses a simple equation to relate the

concentration in each microenvironment to the current ambient concentration. Both methods require that a number of parameters including proximity, penetration and pollutant sources be specified over time, while the MASSBAL method uses some additional parameters, such as air exchange, volume, and decay rates. These methods are described in the next two subsections.

The user is required to specify the calculation methods for each of the microenvironments in the simulation in the *Microenvironment Descriptions* file (see Volume I). Microenvironments within a single simulation may use either method; mixing the methods is allowed with no restrictions.

6.2.1 Mass Balance Method

The mass balance method assumes that an enclosed microenvironment (e.g., a room in a residence) is a single well-mixed volume in which the air concentration is approximately spatially uniform. The concentration of an air pollutant in such a microenvironment is estimated using the following four processes (as illustrated in Figure 6-1):

- Inflow of air into the microenvironment;
- Outflow of air from the microenvironment;
- Removal of a pollutant from the microenvironment due to deposition, filtration, and chemical degradation; and
- Emissions from sources of a pollutant inside the microenvironment.

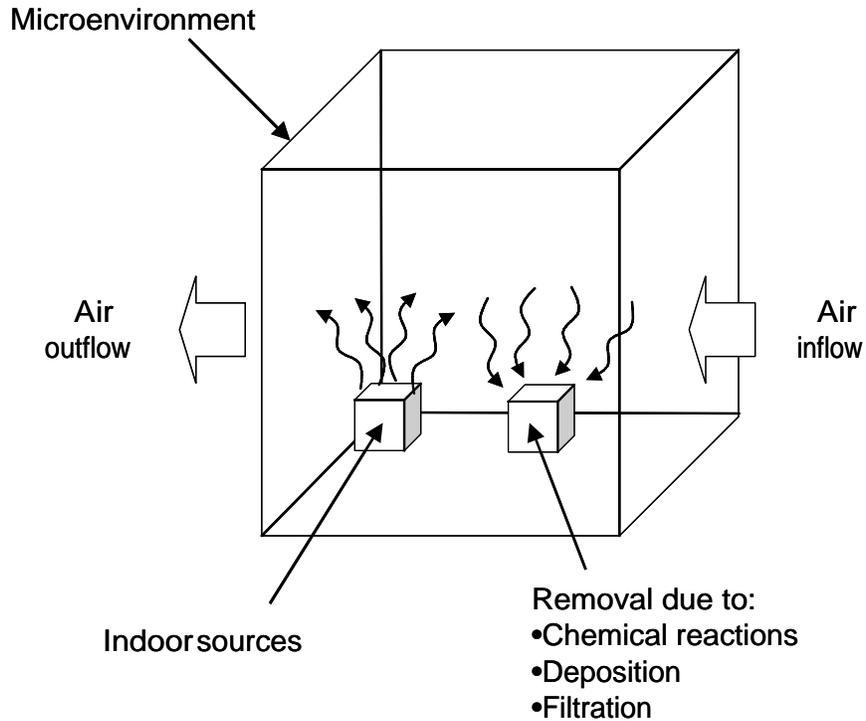


Figure 6-1. The Mass Balance (MASSBAL) Model

It is assumed that the flow of outside air into the microenvironment is equal to that flowing out of the microenvironment, and this rate is given by the air exchange rate, $R_{\text{air exchange}}$. $R_{\text{air exchange}}$ is given in units of hr^{-1} . The air exchange rate can be interpreted as the number of times per hour the entire volume of air in the microenvironment is replaced.

Considering the microenvironment as a distinct, well-mixed volume of air, the mass balance equation for a pollutant can be described by:

$$\frac{dC(t)}{dt} = \dot{C}_{in} - \dot{C}_{out} - \dot{C}_{removal} + \dot{C}_{source} \quad (6-1)$$

where:

- $C(t)$ = Concentration in the microenvironment at time t ($\mu\text{g}/\text{m}^3$)
- \dot{C}_{in} = Rate of change in $C(t)$ due to air entering the micro
- \dot{C}_{out} = Rate of change in $C(t)$ due to air leaving the micro
- $\dot{C}_{removal}$ = Rate of change in $C(t)$ due to all removal processes
- \dot{C}_{source} = Rate of change in $C(t)$ due to all source terms

(Note that concentration must be in the same units as the ambient air quality data, i.e., either ppm or $\mu\text{g}/\text{m}^3$, although throughout these equations concentration is shown only in $\mu\text{g}/\text{m}^3$ for brevity.)

The change in microenvironmental concentration due to influx of air, \dot{C}_{in} , is

$$\dot{C}_{in} = C_{ambient} \times f_{proximity} \times f_{penetration} \times R_{air\ exchange} \quad (6-2)$$

where:

$C_{ambient}$ = Ambient hourly concentration ($\mu\text{g}/\text{m}^3$)

$f_{proximity}$ = Proximity factor (unitless)

$f_{penetration}$ = Penetration factor (unitless)

The proximity factor $f_{proximity}$ is used to account for differences in ambient concentrations between the geographic location represented by the ambient air quality data (e.g., a regional fixed-site monitor) and the geographic location of the microenvironment. That is, the outdoor air at a particular location may differ systematically from the outdoor air at the center of the air quality district. For example, a house might be located next to a busy road in which case the air outside the house would have elevated levels for mobile source pollutants such as carbon monoxide. The concentration $C_{outdoor}$ in the air directly outside the microenvironment is given by the product of the ambient concentration and $f_{proximity}$:

$$C_{outdoor} = f_{proximity} C_{ambient} \quad (6-3)$$

For some pollutants (especially particulate matter), the process of infiltration may remove a fraction of the pollutant from the air. The fraction that is retained in the air is given by the penetration factor $f_{penetration}$. During exploratory analyses, the user may examine how a microenvironment affects overall exposure by setting the microenvironment's proximity or penetration factor to zero, thus effectively eliminating the microenvironment.

Change in microenvironmental concentration due to outflux of air is calculated as the concentration in the microenvironment $C(t)$ multiplied by the air exchange rate:

$$\dot{C}_{out} = R_{air\ exchange} \times C(t) \quad (6-4)$$

The third term in the MASSBAL calculation represents removal processes within the microenvironment. There are three such processes in general: chemical reaction, deposition, and filtration. Chemical reactions are significant for ozone, for example, but not for carbon monoxide. The amount lost to chemical reactions will generally be proportional to the amount present, which in the absence of any other factors would result in an exponential decay in the concentration with time. Similarly, deposition rates are usually given by the product of a (constant) deposition velocity and a (time-varying) concentration, also resulting in an exponential decay. The third removal process is filtration, usually as part of a forced air circulation or HVAC system. Filtration will normally remove particles but not gases. In any case, filtration rates are also proportional to concentration. Change in concentration due to

deposition, filtration, and chemical degradation in a microenvironment is simulated based on the first-order equation:

$$\dot{C}_{removal} = (R_{deposition} + R_{filtration} + R_{chemical})C(t) = R_{removal} \times C(t) \quad (6-5)$$

where:

$\dot{C}_{removal}$	=	Change in microenvironmental concentration due to removal processes ($\mu\text{g}/\text{m}^3/\text{hour}$)
$R_{deposition}$	=	Removal rate of a pollutant from a microenvironment due to deposition (1/hour)
$R_{filtration}$	=	Removal rate of a pollutant from a microenvironment due to filtration (1/hour)
$R_{chemical}$	=	Removal rate of a pollutant from a microenvironment due to chemical degradation (1/hour)
$R_{removal}$	=	Removal rate of a pollutant from a microenvironment due to the combined effects of deposition, filtration, and chemical degradation (1/hour)

For unreactive gases like carbon monoxide, all three removal terms could be zero, in which case $R_{removal} = 0$.

The fourth term in the MASSBAL calculation represents pollutant sources within the microenvironment. This is the most complicated term, in part because several sources may be present. APEX allows two methods of specifying source strengths: emission sources (**ESource** or **ES**) or concentration sources (**CSource** or **CS**). Either may be used for MASSBAL microenvironments, and both can be used within the same microenvironment. The source strength values are used to calculate the source term \dot{C}_{source} , which has standard units of $\mu\text{g}/\text{m}^3/\text{hr}$.

Emission sources are expressed as emission rates in units of $\mu\text{g}/\text{hr}$. To determine the source term associated with an emission source, ES must be divided by the volume V of the microenvironment in m^3 :

$$\dot{C}_{source,ES} = \frac{ES}{V} \quad (6-6)$$

Concentration sources however, are expressed in units of concentration. These must be the same units as used for the ambient concentration (e.g., $\mu\text{g}/\text{m}^3$). Concentration sources are normally used as additive terms for microenvironments using the FACTORS method. Strictly speaking, they are somewhat inconsistent with the MASSBAL method, since concentrations should not be inputs but should be consequences of the dynamics of the system. Nevertheless, a suitable meaning can be found by determining the source strength \dot{C}_{source} that would result in a mean

increase of CS in the concentration, given constant parameters and equilibrium conditions, in this way:

Assume that a microenvironment is always in contact with clean air (ambient = zero), and it contains one concentration source. Then the mean concentration over time in this microenvironment from this source should be numerically equal to CS. The mean source strength expressed in ppm/hr or $\mu\text{g}/\text{m}^3/\text{hr}$ is the rate of change in concentration $\dot{C}_{\text{source,CS}}$. In equilibrium,

$$CS = \frac{\dot{C}_{\text{source,CS}}}{R_{\text{air exchange}} + R_{\text{removal}}} \quad (6-7)$$

$\dot{C}_{\text{source,CS}}$ can be written as

$$\dot{C}_{\text{source,CS}} = CS \times R_{\text{mean}} \quad (6-8)$$

where R_{mean} is the chemical removal rate. $\dot{C}_{\text{source,CS}}$. From eq 6-7, R_{mean} is equal to the sum of the air exchange rate and the removal rate ($R_{\text{air exchange}} + R_{\text{removal}}$) under equilibrium conditions. In general, however, the microenvironment will not be in equilibrium, but in such conditions there is no clear meaning to attach to $\dot{C}_{\text{source,CS}}$ since there is no fixed emission rate that will lead to a fixed increase in concentration. The simplest solution is to use $R_{\text{mean}} = R_{\text{air exchange}} + R_{\text{removal}}$. However, the user is given the option of specifically specifying R_{mean} (see discussion of parameters below). This may be used to generate a truly constant source strength $\dot{C}_{\text{source,CS}}$ by making CS and R_{mean} both constant in time. If this is not done, then R_{mean} is simply set to the sum of ($R_{\text{air exchange}} + R_{\text{removal}}$). If these parameters change over time, then $\dot{C}_{\text{source,CS}}$ also changes. Physically, the reason for this is that in order to maintain a fixed elevation of concentration over the base conditions, then the source emission rate would have to rise if the air exchange rate were to rise.

Multiple emission and concentration sources within a single microenvironment are combined into the final total source term by combining equations 6-6 and 6-8:

$$\dot{C}_{\text{source}} = \dot{C}_{\text{source,ES}} + \dot{C}_{\text{source,CS}} = \frac{1}{V} \sum_{i=1}^{n_e} ES_i + R_{\text{mean}} \sum_{i=1}^{n_c} CS_i \quad (6-9)$$

where:

- ES_i = Emission source strength for emission source i ($\mu\text{g}/\text{hour}$)
- CS_i = Emission source strength for concentration source i ($\mu\text{g}/\text{m}^3$)
- n_e = Number of emission sources in the microenvironment
- n_c = Number of concentration sources in the microenvironment

(A note on units: The above equation is modified if the units of air quality are ppm rather than $\mu\text{g}/\text{m}^3$. Specifically, $1/V$ is replaced by f/V , where $f = 1/\text{ppmFact}$. The value of ppmFact is a user-supplied in the *Simulation Control* input file; it expresses the number of $\mu\text{g}/\text{m}^3$ that equate to 1 ppm. For the pollutant CO, ppmFact=1,145.)

Equations 6-2, 6-4, 6-5, and 6-9 can now be combined with 6-1 to form the differential equation for the microenvironmental concentration $C(t)$. Within the time period of an hour, \dot{C}_{source} and \dot{C}_{in} are assumed to be constant. Using $\dot{C}_{\text{combined}} = \dot{C}_{\text{source}} + \dot{C}_{\text{in}}$ leads to:

$$\begin{aligned} \frac{dC(t)}{dt} &= \dot{C}_{\text{combined}} - R_{\text{air exchange}} C(t) - R_{\text{removal}} C(t) \\ &= \dot{C}_{\text{combined}} - R_{\text{mean}} C(t) \end{aligned} \quad (6-10)$$

Solving this differential equation leads to:

$$C(t) = \frac{\dot{C}_{\text{combined}}}{R_{\text{mean}}} + \left(C(0) - \frac{\dot{C}_{\text{combined}}}{R_{\text{mean}}} \right) e^{-R_{\text{mean}} t} \quad (6-11)$$

where:

- $C(0)$ = Concentration of a pollutant in a microenvironment at the beginning of a hour ($\mu\text{g}/\text{m}^3$)
- $C(t)$ = Concentration of a pollutant in a microenvironment at time t within the time period of a hour ($\mu\text{g}/\text{m}^3$).

Based on Eq. (6-11), the following three concentrations in a microenvironment are calculated:

$$C_{\text{equil}} = C(t \rightarrow \infty) = \frac{\dot{C}_{\text{combined}}}{R_{\text{mean}}} = \frac{\dot{C}_{\text{source}} + \dot{C}_{\text{in}}}{R_{\text{air exchange}} + R_{\text{removal}}} \quad (6-12)$$

$$C_{\text{hourly end}} = C_{\text{equil}} - (C(0) - C_{\text{equil}}) e^{-R_{\text{mean}}} \quad (6-13)$$

$$C_{\text{hourly mean}} = \frac{\int_0^1 C(t) dt}{\int_0^1 dt} = C_{\text{equil}} + (C(0) - C_{\text{equil}}) \frac{1 - e^{-R_{\text{mean}}}}{R_{\text{mean}}} \quad (6-14)$$

where:

- C_{equil} = Concentration in a microenvironment ($\mu\text{g}/\text{m}^3$) if $t \rightarrow \infty$ (equilibrium state).

$C(0)$	=	Concentration in a microenvironment at the beginning of the hour ($\mu\text{g}/\text{m}^3$)
$C_{\text{hourly end}}$	=	Concentration in a microenvironment at the end of the hour ($\mu\text{g}/\text{m}^3$)
$C_{\text{hourly mean}}$	=	Hourly mean concentration in a microenvironment ($\mu\text{g}/\text{m}^3$)
R_{mean}	=	$R_{\text{air exchange}} + R_{\text{removal}}$ (1/hour)

At each hour time step of the simulation period, APEX uses Eqs. 6-12, 6-13, and 6-14 to calculate the hourly equilibrium, hourly ending, and hourly mean concentrations. APEX reports hourly mean concentration as hourly concentration for a specific hour. The calculation continues to the next hour by using $C_{\text{hourly end}}$ for the previous hour as $C(0)$.

The microenvironmental parameters for the MASSBAL method that can be defined by the user in the *Microenvironment Descriptions* file are summarized in the Table 6-2, with their valid ranges and their corresponding names in the file.

Table 6-2. Microenvironmental Parameters

Parameter	Definition	Units	Range	Default Value	Name ^a
$f_{\text{proximity}}$	Proximity factor	unitless	$f_{\text{proximity}} \geq 0$	1	PR
$f_{\text{penetration}}$	Penetration factor	unitless	$0 \leq f_{\text{penetration}} \leq 1$	1	PE
CS	Concentration source	$\mu\text{g}/\text{m}^3$ or ppm	$CS \geq 0$	0	CS
ES	Emission source	$\mu\text{g}/\text{hr}$	$ES \geq 0$	0	ES
R_{removal}	Removal rate due to deposition, filtration, and chemical reaction	1/hr	$R_{\text{removal}} \geq 0$	0	DE
$R_{\text{air exchange}}$	Air exchange rate	1/hr	$R_{\text{air exchange}} \geq 0$	none	AE
R_{mean}	Mean removal rate:	1/hr	$R_{\text{mean}} \geq 0$	$R_{\text{removal}} + R_{\text{air exchange}}$	MR
V	Volume of microenvironment	m^3	$V > 0$	none	V

^a Designation in Microenvironment Descriptions File

Not all of the possible parameters are always needed, and several of them have natural default values. Based on the above equations, the following generalizations can be made about the definition of the MASSBAL parameters in the *Microenvironment Descriptions* file:

- Air exchange rate is a critical parameter that is always needed in a MASSBAL calculation. It must always be defined in the file as it has no default value.
- Removal rate must also be user-defined in the file if not assumed to be zero. For some pollutants it can be assumed to have a natural default value of zero.
- The proximity and penetration factors must be defined in the file unless assumed to be unity, which is the natural default value for both factors that should be used in the absence of data to the contrary.
- If any emission source terms are present then volume must be defined. Volume has no default value.
- If any concentration source terms are present then the mean removal rate may be user-defined, but if appropriate, it may assume a default value of $(R_{\text{air exchange}} + R_{\text{removal}})$.

The details for specifying these input parameters in the *Microenvironment Descriptions* file are provided in the Volume I of this User's Guide. Further details on the options for designating these parameters are given in Section 6.2.3.

In APEX, it is assumed that the outdoor concentration and the other modeling parameters for the MASSBAL method remain constant during any clock hour. This allows the concentration in the microenvironment to be determined using a one hour time step. Of course, in many cases the MASSBAL parameters do not remain constant for an hour at a time. For example, a person may enter a microenvironment and smoke a cigarette for five or ten minutes and then leave. Or, someone might enter a kitchen and cook for a few minutes using a gas stove. Or one might alter an air exchange rate by opening or closing a window. There are two reasons why it is difficult to model such events in APEX. First, there is already a large computational burden in calculating concentrations in every microenvironment for every hour for every simulated person. This burden would be substantially larger if finer time resolution were demanded. Second, most examples of fine-scale parameter variation are driven by human actions. The CHAD activity diaries generally do not contain enough detail to determine when each cigarette is lit or each time a stove is used or a window is opened or closed. Furthermore, the diaries only follow the activities of a single person. It is quite possible for these actions to be performed by other people. For example, if the activity diary follows a child, then the child's parents may be doing these things that affect the properties of the microenvironments that the child is in. Since the diaries do not reliably report such information, it was decided that finer time resolution could not reliably be used for the calculation of concentrations.

In a MASSBAL microenvironment, the concentration during any hour depends on the concentration for the hour before. Ultimately, all hours depend on some method for establishing initial conditions. To avoid the problem of establishing new initial conditions every time the activity diary indicates that a MASSBAL microenvironment is entered, the time series is evaluated for all hours in the simulation period. An extra 24 hour period is added prior to the start of the APEX simulation period by duplicating the properties from the first day of the simulation period. It is assumed that 24 hours is sufficient so that equilibrium is approached and the initial concentration becomes irrelevant. The entire simulation period is then evaluated hour by hour without gaps, with each hour being used to determine the next.

6.2.2 Factors Method

The FACTORS method is simpler than the mass balance method. In this method, the value of the concentration in a microenvironment is not dependent on the concentration during the previous hour. Rather, the method uses the following equation to calculate hourly concentration in a microenvironment from the user-provided hourly air quality data:

$$C_{\text{hourly}} = C_{\text{ambient}} f_{\text{proximity}} f_{\text{penetration}} + \sum_{i=1}^{n_c} CS_i \quad (6-15)$$

where:

- C_{hourly} = Hourly concentration in a microenvironment ($\mu\text{g}/\text{m}^3$)
- C_{ambient} = Hourly concentration in ambient environment ($\mu\text{g}/\text{m}^3$)
- $f_{\text{proximity}}$ = Proximity factor (unitless)
- $f_{\text{penetration}}$ = Penetration factor (unitless)
- CS_i = Mean air concentration resulting from source i ($\mu\text{g}/\text{m}^3$)
- n_c = number of concentration sources in the microenvironment

The user may provide values for proximity, penetration, and any concentration source terms, or may allow them to assume default values (see Table 6-2); however, it is not mandatory that the user supply any values if the default values are suitable. An undefined proximity or penetration is assumed to be unity at all times. Missing (i.e., undefined) sources are assumed to be zero. Parameters are left undefined by simply omitting them from the *Microenvironment Descriptions* input file. If all parameters are missing, then the concentration in the microenvironment is always the same as the ambient concentration. All of the parameters in the above equation are evaluated for each hour, although these values might remain constant for several hours or even for the entire simulation. For the ambient concentration, the hourly values come from an input data file, and may be either measurements or modeled results. For the other parameters, the hourly values are the result of the calculations based on the information specified in the *Microenvironment Descriptions* input file.

6.2.3 Microenvironment Parameter Definitions

The second section of the *Microenvironment Descriptions* input file contains the rules for determining the values of the parameters used in the MASSBAL and FACTORS methods. Instructions for specifying microenvironmental input parameters (those in Table 6-2) in the *Microenvironment Descriptions* file are provided in Volume I of this User's Guide, but further details on the options for using resampling rates, conditional variables, periodic (daily, weekly, and monthly) groupings, and random seeds, are provided in this section. This includes an explanation of ways to specify CS terms as products of distributions.

Both of the concentration calculation methods require multiple user-defined input parameters. These microenvironmental parameters are defined by probability distributions defined in the *Microenvironment Descriptions* input file, with values being sampled from the distributions every hour of the simulation. The file is read in **MicroEnvModule:ReadMicroData**. Any of the following distribution types can be specified for each parameter:

- Single point
- Uniform
- Normal
- Log-normal
- Triangle
- Exponential
- Off/On
- Discrete
- Histogram

The user may provide different distribution data for the parameter for any combination of the following temporal and spatial variables:

- Hour in a day
- Day in a week
- Month in a year (i.e., season)
- Air quality district

For example, the user can define probability distributions for a parameter that vary depending on the time of day and whether the simulated hour is on a weekday or a weekend, or the user can define a distribution that changes with the season of the year and with the air quality district associated with the microenvironment being considered (recall that home and work sectors for each profile will be associated with a unique air quality district).

The distributions for the microenvironmental parameters may also depend on conditional variables that are a subset of the profile variables for an individual. A single microenvironmental parameter may depend on up to three of the above conditional variables.

The rules for determining any microenvironmental parameter (MP) are unique to each microenvironment. For example, the rules for proximity for a house may differ completely from the rules for proximity for a car. Every combination of parameter and microenvironment is distinct. The order in which the MP definitions are presented is not significant to APEX,

although it might help the user to group them by microenvironment or by MP. Note that the entire definition of an MP can be omitted if its default value is acceptable, so for example if proximity is always to be unity in some microenvironment, then no MP definition is needed for proximity in that microenvironment. The example in Exhibit 6-1 shows one possibility for the proximity parameter for microenvironment #1. The actual data are only for illustrative purposes and are not intended to properly represent this MP in any real scenario.

Micro number	=	1										
Parameter Type	=	Proximity										
Hours - Block	=	1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2 2 2 2 1 1 1 1 1										
Weekday - Daytype	=	1 1 1 1 1 1 1										
Month - Season	=	1 1 2 2 2 3 3 3 4 4 4 1										
District- Area	=	1 1 1 1 1 1										
Condition # 1	=	0										
Condition # 2	=	0										
Condition # 3	=	0										
ResampHours	=	NO										
ResampDays	=	YES										
ResampWork	=	YES										
RandomSeed	=	0										
Block	DType	Season	Area	C1	C2	C3	Shape	Min	Max	Par1	Par2	
1	1	1	1	1	1	1	Normal	0.0	4.0	1.5	1.2	
2	1	1	1	1	1	1	Point	2.0	.	.	.	
1	1	2	1	1	1	1	Lognormal	0.0	6.0	2.0	1.5	
2	1	2	1	1	1	1	Exponential	1.0	.	2.0	.	
1	1	3	1	1	1	1	Triangle	0.0	3.0	2.0	.	
2	1	3	1	1	1	1	Normal	1.0	.	2.5	1.5	
1	1	4	1	1	1	1	Uniform	0.0	3.0	.	.	
2	1	4	1	1	1	1	Lognormal	1.0	.	3.0	2.0	

Exhibit 6-1. Example of a Microenvironmental Parameter Description

The general format is the same for all MPs. The first two lines are mandatory and specify the microenvironment number and the MP, or parameter type. This combination should be unique for every MP in the input file, with the possible exception of enumerated sources (discussed later).

The parameter types are indicated using standard keywords (given in Table 6-2). Note that only the first two characters of the parameter type are checked by APEX, and the keyword is not case sensitive, so the example above could use “PR”. The user may spell out the parameter types if desired, providing greater clarity.

After the microenvironment number and parameter type, any or all of the remaining lines containing an equal sign may be omitted. These indicate the settings for various options, all of which have default values. These settings may appear in any order within the description; they are recognized via the keyword that precedes the equal sign. One option, missing in the above example since it only applies to parameter types ES and CS, is the source number. See section 6.2.3.5 for an example using this option. The other seven options are the mappings that determine the values for the seven indices that label each distribution. This is followed by three resampling options and a random seed initialization option. These options are covered in the following subsections.

After all the options are specified, the next line (starting with “Block”) indicates that the following lines contain descriptions of distributions. At least one distribution is always required;

the exact number needed depends on the settings of the seven indexing options. The shortest possible MP description (other than one completely missing) consists of four lines. Such a description would have the first two mandatory lines, the header line indicating that distributions follow, and a single distribution that applies to all hours of the simulation, as in Exhibit 6-2.

Micro number	=	1									
Parameter Type	=	Proximity									
Block	DType	Season	Area	C1	C2	C3	Shape	Min	Max	Par1	Par2
1	1	1	1	1	1	1	Normal	0.	4.	1.5	1.2

Exhibit 6-2. Example of the Shortest Possible MP Description

These rules state that the proximity in microenvironment #1 is to be drawn from a normal distribution with mean 1.5 and standard deviation 2.0. If the value drawn is below zero or above 4.0 then another value is drawn, until one is found that is within bounds. This single value is then applied to all hours of the simulation, for that particular simulated individual, for their home air quality district. A separate single value is applied to that individual for all hours in their work district. Actually, a third value, the average of the first two, is applied to all hours in the “other” (non-home, non-work) air quality district. In effect, all the microenvironments are modeled in triplicate to account for the three different places. In the above example the three values would all be the same if an extra line “ResampleWork =NO” were added after the second line. Each simulated individual is modeled independently so new values are drawn for all parameters when starting another profile.

It is necessary that all the parameter distribution data be given in the correct units (i.e. those that are compatible with the data in the *Air Quality Data* input file.)

The motivation for the rather complex programming that defines and evaluates the MP is that the various parameters that enter the MASSBAL and FACTORS equations may have widely divergent properties. For example, a parameter like house volume should have a single value that does not change over time. Another parameter such as an air exchange rate may change every hour. Some parameters like source strengths from cooking or from traffic may show strong diurnal patterns that may repeat on a daily or a weekly basis. Parameters that relate to temperature may show seasonal variation.

There are a number of possibilities for each optional rule in the MP definitions. The options fall into the following categories:

- Time and area mappings;
- Conditional variables;
- Resampling options;
- Random number seeds; and
- Source number specification.

Each of these are discussed in the following subsections, after which comes a brief subsection on the specification of distributions.

6.2.3.1 Time and Area Mappings

Each MP is evaluated for every hour of the simulation period. Normally this is done by drawing a value at random from a distribution. The user may specify that different distributions apply at different hours. Furthermore, the frequency of sampling can be controlled by the user. It is not the case that a new value must be drawn every hour, instead values drawn for other times may be reused. The primary purpose of the time and area mappings is to specify which distribution applies to each hour. The secondary purpose, in conjunction with the resampling options, is to establish periodic reuse of values on a daily, weekly, monthly, or geographical basis.

As an example, suppose some parameter should be sampled from one distribution during typical working hours and from another distribution at other times. This can be accomplished by defining two “blocks” and assigning each hour of the day to either block #1 or block #2. Perhaps hours 1-7 (midnight to 7 a.m.) and hours 19-24 (6 p.m. to midnight) belong to block #1, while hours 8-18 (7 a.m. to 6 p.m.) belong to block #2. Then distributions must be defined for block #1 and block #2. Hours that fall into block #1 will have their parameter values drawn from the distribution that applies to block #1, and so on. If, for example, the distribution for block #2 has the higher mean, then the daytime values for the parameter will generally be higher than the nighttime values, generating a diurnal pattern. Similarly, weekly and seasonal patterns may be generated.

The Hour-Block (HB) mapping indicates the block to which each hour of the day belongs. The mapping must contain 24 numbers. The first is the block number for hour 1 (midnight to 1 a.m.), and so on. All hours belonging to the same block use the same distribution. The block numbers range from 1 upwards; there can be anything from 1 to 24 blocks. The number of blocks (#blocks) is determined from this mapping itself. If the Hour-Block mapping is missing it is assumed that there is only one block, which implies that the parameter values for all 24 hours of the day are taken from the same distribution. The term “Block” might suggest that the hours belonging to a given block should be adjacent chronologically, but this is not necessary in APEX. It is also not necessary for each block to contain the same number of hours.

The Weekday-Daytype (WT) mapping is similar to the Hour-Block mapping, except that it contains seven values instead of 24. The first value is the daytype for Sunday, the second is for Monday, and so on until the last which is the daytype for Saturday. The seven days of the week are in the same order as on a standard calendar. Thus if daytype 1 is weekday and 2 is weekend, the vector should be (2 1 1 1 1 1 2), but without the parentheses. The mapping (1 2 2 2 2 2 1) would be equivalent if the distributions presented further down were appropriately renumbered. If the WT mapping is missing in the *Microenvironment Descriptions* input file, then only one daytype is assumed, that is, the default mapping is (1 1 1 1 1 1 1).

The Month-Season (MS) mapping is similar to the previous two, except that 12 numbers are needed. The first number indicates the season for January, and so on through December. Again, if this mapping is missing then a single season is assumed to apply to all months.

The District-Area (DA) mapping is similar to the others, except that the number of air quality districts is not a universal constant, but may vary from one simulation to another. If the mapping is present, the user must ensure that it contains the correct number of terms (one area assignment for each air quality district in the study area).

If the user defines 2 blocks, 2 daytypes, 4 seasons, and 3 areas, then a total of 48 distributions (that is, $2 \times 2 \times 4 \times 3$) must be specified, one for each possible combination. The number would be even larger if any conditional variables were used. To ease the burden of data requirements the number of cases should be kept to a minimum. For example, if the seasonal dependence of this parameter were weak, one could eliminate it and reduce the number of distributions from 48 to just 12. If this is too extreme, perhaps two seasons would suffice to capture the variation. The number of seasons (or blocks, daytypes, or areas) can be defined differently for each MP, even ones that belong to the same microenvironment. Each MP is evaluated for all hours in the simulation period, independently of other MP, so there is no reason why the rules for one MP should match or correspond with the rules for any other MP.

6.2.3.2 Conditional Variables

Selected profile variables may be used to influence the parameter values in the MASSBAL or FACTORS equations. These profile variables are known as *Conditional Variables*. The list of variables to use for the current simulation are set in **ProfileModule: SetCVlist**. The allowable conditional profile variables are:

- *Gender*
- *Race*
- *Employed*
- *HasGasStove*
- *HasGasPilot*
- *AC_Home*
- *AC_Car*
- *Window_Res*
- *Window_Car*
- *Speed Cat*
- *Conditional1*
- *Conditional2*

- **Conditional3**

See Chapter 4 for definition of these variables. With the exception of the first three, rules for setting these variables for each profile are defined in the *Profile Functions (Distributions)* input file. In addition to these variables, the MPs can also depend on two meteorological variables:

- **MaxTempCat**

- **AveTempCat**

TempCatM is daily maximum temperature, binned into categories. TempCatA is similar, but uses the daily average temperature. As these variables depend on the average and maximum temperature data for the simulation day rather than the person being simulated, these variables are not profile variables. However, rules for defining them are also designated in the *Profile Functions (Distributions)* input file (see Volume I).

Note that Conditional Variables must be integer, since their values are used as indices to select the distribution to be sampled. In practice, the number of categories must be fairly small (generally 2 or 3) or else the burden of defining distributions for every case becomes burdensome. It should be noted that while the concentrations in various microenvironments may depend on the profile through the conditional variables, these concentrations do not depend on the activity diaries or the event structure.

The user may select up to three Conditional Variables from the list for each MP. If one is used, it does not matter whether conditional variable #1, #2, or #3 is used. If more than one is used then the order they are designated does not matter.

The conditional variable to be applied is identified by its name. For example, if a parameter were to depend on gender then it would be indicated as follows in the input file:

```
Condition # 1 = Gender
```

Note that the word “Gender” must be spelled out in full as in the above list, but it is not case sensitive. There are two ways to indicate that a conditional variable is not used. Either the line for it can be omitted, or else the variable name can be set to anything that is not on the list. The standard practice (if the line is not simply omitted) is to set the right hand side to zero:

```
Condition # 1 = 0
```

There is a complication for the user when it comes to specifying the distributions that are applicable to conditional variables. Each distribution has seven indices (four for time and area mappings and three for Conditional Variables). But the values that any index may have must be integers. Thus, if gender is used as a Conditional Variable then the user must specify distributions for gender=1 and for gender=2. The user cannot use mnemonic devices such as “M” or “F” instead. The numerical codes for the Conditional Variable are set as constants in **GlobalModule** and are as follows:

- **Gender:** 1=Male, 2=Female

- **Race:** 1=White, 2=Black, 3=Asian, 4=Native American, 5=Other
- **Employed:** 1=YES, 2=NO
- **HasGasStove** 1=YES, 2=NO
- **HasGasPilot:** 1=YES, 2=NO
- **AC_Car:** 1=YES, 2=NO
- **Window_Res:** 1=OPEN, 2=CLOSED
- **Window_Car:** 1=OPEN, 2=CLOSED

For the other Conditional Variables, the numerical values are provided by the user in the *Profile Functions* input file, so there are no pre-assigned ranges or interpretations. The list of conditional variables to be used in defining MPs is set in **DistributionModule:SetCVList**.

6.2.3.3 Resampling Options

The time and area mappings indicate which cases are to have their parameter values drawn from the same distribution. However, they do not distinguish between cases when a single parameter value is to be drawn and applied to multiple hours and when separate values from the same distribution are to be drawn. The concept is called resampling, and the two specific cases mentioned above correspond to ResampHours=NO and ResampHours=YES.

There are three resampling options, namely for hours, days, and work air quality district. Each may be set to either YES or NO. As indicated above, if ResampHours=NO, then all hours in the same block on any given day will share the same parameter value. For each day, one parameter value is drawn for each block. Hours in different blocks have their values drawn from different distributions, so these values are never shared. If ResampHours=YES, then each hour in the same block on the same day will have its own value drawn, so 24 values will be drawn no matter how many blocks there are. In this case the blocks serve only to determine which parent distribution is used for each particular hour. The default is ResampHours=NO.

The second resampling option is ResampDays. If ResampDays=NO, then the same daily profile (set of 24 hourly values) is used on all days in the same category. If ResampDays=YES, then all days have new sets of values drawn for them. The category for days is defined by the combination of daytype, season, and conditional variables. An example might be all winter weekdays with windows open, if daytype = weekday and season = winter and condition #1 = (WindowPos==OPEN), assuming these terms have been defined appropriately. If ResampDays=NO (which is the default) then all such days in the simulation period will share the same set of hourly values.

The third resampling option is ResampWork. APEX normally generates different parameter values for home and work locations. However, there are cases when this is not logical. For example, if a car is defined to be a microenvironment and it uses the mass balance method, the volume of the car should be the same whether the car is at home or at work. If

ResampWork=YES, then home and work always draw parameter values independently. If ResampWork=NO, then the same values are used for work as for home. Since such cases are rare, ResampWork=YES is the default, meaning that the workplace will have its values sampled independently of the home.

To summarize, the default values for ResampHours and ResampDays are NO, and for ResampWork it is YES. This means that the default is to draw only two values (one for home and one for work) from each distribution listed for that MP and to apply those values whenever possible. If a default is to be used then the line may be omitted from the input file, but it does not hurt to show the lines anyway for purposes of clarity.

6.2.3.4 Random Number Seeds

One of the features of the APEX models is the ability to conduct paired runs by controlling the random number seeds. In normal use the model stochastically generates random profiles, selects diaries, and generates MP values from distributions. If multiple model runs are to be independent then the main *RandomSeed* value in the *Simulation Control* input file should be set to zero. If model runs are to be paired, then similar streams of random numbers are desired, in which case RandomSeed should be set to the same positive number in both runs.

Creating paired runs in which everything is identical will create results that are identical as well. Thus, the usual mode of operation is to have one specific difference between the two runs and then see how much effect it has on the results. The difficulty from a programming point of view is that it is not sufficient to simply start both runs with the same random number seed. In addition, multiple random number streams are required. As an example, suppose one of the paired runs contains an extra source term, and there was only one random number stream. The first profile in both runs would be the same, as would all random numbers evaluated until values are drawn for the new source. From then on the two runs will be drawing random numbers out of phase, meaning at different points in the stream. This means that the next profile will differ between the two runs.

The solution to the problem of getting out of phase is to set up multiple random number streams. Then, for example, it is possible to generate the profile variables by sampling from one stream while generating sources from another. This ensures that even if the sources differ, the same profiles will be generated in both runs, since the random numbers used for the profiles always will stay in step. The “extra” random numbers used for the additional source are drawn from a separate stream and therefore do not affect the status of any of the other streams.

All of the MP, not just sources, use random numbers to sample distributions. If one changes ResampHours=NO to ResampHours=YES on any one MP, then the number of random values to be drawn for that MP changes enormously. Yet this is a typical change that might be implemented between two paired runs. The only general solution is to construct a separate random number stream for every MP.

Each MP has an optional line for setting a RandomSeed specific to that MP. There are two choices. If RandomSeed is set to a positive value, then that sets an absolute starting point for the stream for that MP that can be set the same in another run. If RandomSeed = 0 (which is the

default) then the seed is chosen internally. This internal seed is fixed relative to the overall model seed as defined in the *Simulation Control* file, based on the order of the MP definitions. Thus, if the first MP defined in the *Microenvironment Descriptions* input file has `RandomSeed = 0`, then this stream will begin at a fixed offset from the main stream for the model run. There are two cases, depending on whether the main seed has a fixed value or is set to zero. If the main seed is fixed (as for two paired runs), then the starting seed value for any MP will be the same in both runs, provided the MP are in exactly the same order in both runs. However, this is not the case unless the run with “extra” MP has them all appear in the input file after the MP that are in common to both runs. To avoid this restriction, it is better in paired runs to set each MP to have a non-zero random seed of its own.

If an MP has `RandomSeed=0` and the *Simulation Control* file also has `RandomSeed = 0`, then the MP will have a starting seed that has a fixed offset from a randomly chosen main seed. This means that the MP will draw random numbers independently from one run to another.

In summary there are three cases. If independent, random runs are desired then set the main `RandomSeed` in the *Simulation Control* file to zero and for each MP either set the `RandomSeed` to zero or simply omit the option. If paired runs are desired and the MP are not altered between runs, then the main seed in the *Simulation Control* file should be nonzero and it does not matter whether the seeds for each MP are zero or not (although if they are not zero the seeds should be the same in both runs). If paired runs involve changes to the list of MP then all seeds should be set to positive values, matching seeds in the MP common to both runs.

6.2.3.5 Source Strength Specification

As described in the sections on the MASSBAL and FACTORS methods (Sections 6.2.1 and 6.2.2), APEX allows two types of sources to be defined. ***ESource*** terms are emission sources expressed in units of micrograms per hour. ***CSource*** terms are sources expressed in concentration units of $\mu\text{g}/\text{m}^3$ (or ppm). ***ESource*** and ***CSource*** strengths can optionally be specified as the product of two or more values drawn from different distributions.

As an example, an ***ESource*** term representing emissions from gas stoves can be constructed as the product of three terms: a binary switch for Use/Non-use for each hour, a duration of usage term, and an emission rate per minute of usage. One advantage of separating this term into three pieces is that different rules for the time and area mappings and the resampling rate can be defined for each of the three pieces.

Each source in APEX, meaning each MP of type ES or CS, may be assigned an optional source number. This is done by adding a line to the MP definition as in Exhibit 6-3:

Micro number	=	4										
Parameter Type	=	ES										
Source number	=	2										
Block	DType	Season	Area	C1	C2	C3	Shape	Min	Max	Par1	Par2	
1	1	1	1	1	1	1	Lognormal	100.	10000.	1000.	2.0	

Exhibit 6-3. Use of Source Number in MP Definition

For clarity, the source number should appear right after the parameter type. It cannot appear earlier nor can it appear after the header line starting with “Block”. It only applies to types ES or CS and is not relevant for other parameter types. If the source number is omitted then it is assumed to be zero, which is the catch-all category for additive source terms.

All MP of type ES or CS that share the same microenvironment number and source number are evaluated separately for all hours according to their own rules, then the results are multiplied together on an hourly basis. For example, if another MP has the description shown in Exhibit 6-4, then both this MP and the previous one are evaluated hourly and then the results are multiplied together, hour by hour.

Micro number	=	4																			
Parameter Type	=	ES																			
Source number	=	2																			
Hours	- Block	=	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	1	1	1	1
ResampHours	=	YES																			
ResampDays	=	YES																			
Block	DType	Season	Area	C1	C2	C3	Shape	Min	Max	Par1	Par2										
1	1	1	1	1	1	1	Normal	0.	60.	10.	10.										
2	1	1	1	1	1	1	Point	45.	.	.	.										

Exhibit 6-4. Second MP Definition with Source Number 2.

Since the first MP was not resampled, only one value is generated per person and that value remains constant over the simulation. The second MP is resampled every hour (although the hours using the Point distribution will all return the same value).

It is possible to have a large number of terms sharing the same microenvironment and source numbers, in which case all terms are evaluated separately and the hourly results are multiplied. Note that all terms sharing the same microenvironment and nonzero source numbers must also share the same parameter type; one cannot mix ES and CS types since it does not make sense to multiply them together. APEX will generate an error message if this is attempted. It is possible for some sources to be ES while others are CS, even in the same microenvironment, as long as they are not assigned the same nonzero source numbers.

Once the product is evaluated, the result is treated exactly the same as any additive sources for that microenvironment. All ESource terms are added together hour by hour, whether each resulted from a product or was a separate term by itself. The same applies to all CSource terms in the same microenvironment. In effect there is no change at all to either the MASSBAL or the FACTORS equations, there is simply a change in how the ESource and CSource terms are determined.

When defining product terms, a line must be added to the *Simulation Control* input file indicating the largest source number used in the run. This line has the keyword **#SOURCES** and it might appear as in the *Simulation Control* file excerpt shown in Exhibit 6-5.

```
#profiles = 10
#micros   = 4
#sources   = 3
start_date = 19950101
end_date   = 19951231
```

Exhibit 6-5. Use of #sources Setting in Simulation Control File.

This value reported here (3 in this case) is echoed to the *Log* file after “#microenvironments” and it is called “#Enumerated sources”. Actually, like #microenvironments, this value is only used to allocate array space, and APEX will run correctly as long as #sources is large enough to accommodate the source numbers used in the *Microenvironment Descriptions* input file. If #sources is larger than is needed, no error occurs although job execution will be slightly less efficient. This line can only be omitted from the *Simulation Control* file if no source numbers are assigned to any MP.

Not all sources need be expressed as products. These sources can either be left without source numbers or can explicitly have source number of zero, or may even have a positive source number. If there is only one MP with a given microenvironment number and source number, then it essentially constitutes a product with only one term.

6.2.3.6 Specification of Distribution Data

The number of distributions that the user must supply for each MP is the product of these numbers:

$$N_{\text{Distributions}} = N_{\text{blocks}} \times N_{\text{daytypes}} \times N_{\text{seasons}} * N_{\text{areas}} \times N_{C1} * N_{C2} * N_{C3} \quad (6-16)$$

Here N_{C1} - N_{C3} are the number of possible responses for conditional variables #1-#3. If a conditional variable is not used, then it has one possible value (its index is always equal to 1). The number of possible responses varies from one conditional variable to another. For the preset Conditional Variables, race has five values and the others have two values. For other Conditional Variables the number is determined from the definition supplied by the user in the *Profile Functions (Distributions)* input file.

Each distribution occupies one line in the *Microenvironment Descriptions* input file. Every combination of the seven indices must have a distribution defined, even if that specific combination never occurs during the simulation. For example, if a winter season exists then it must have a set of distributions defined, even if the simulation period only covers the summer. The reason is that the distributions are stored in an array with room for all possible combinations of index values, and this array is checked once for gaps (missing data) before the first profile is begun. This is more efficient than checking to see if a distribution exists every time it is called,

as a model run can contain millions or even billions of calls to distributions. The price is that distributions that ultimately are never called must still exist in the array.

The user does not need to number the distributions, this is done internally by the program. The distributions are assigned index numbers in standard Fortran order (the block index changes fastest, and Condition #3 changes slowest). Thus, distribution#1 is for (1,1,1,1,1,1,1), and if there is more than one block then distribution#2 is for (2,1,1,1,1,1,1), etc. In the input file the distributions can appear in any order, but the standard order is preferred for consistency.

Each line describing a distribution contains the following information. First, the seven indices are listed; block, daytype, season, area, c1, c2, and c3. The seven indices must all appear explicitly in the set order. Any superfluous indices must be given a value of one. Thus if a conditional variable such as c3 is not used then the c3 index number is 1 for all distributions for that MP.

After the seven indices comes the distributional shape. Possible shapes include point, uniform, normal, lognormal, triangle, exponential, and OffOn. The program actually checks only the first letter of the shape, so these can be abbreviated as P, U, N, L, T, E, and O, respectively. Finally, four parameters are listed, the minimum, maximum, and two others. Not all parameters are necessary; missing ones are represented by periods. Table 6-3 lists the required parameters of the different distribution types.

Table 6-3. Distributional Parameters

Shape	Required Parameters	Optional Parameters
Point	Min	
Uniform	Min, Max	
Normal	Par1 (Mean), Par2 (Std. Dev)	Min, Max
Lognormal	Par1 (Geo. mean), Par2 (Geo. Std.)	Min, Max
Triangle	Min, Max, Par1 (Mode)	
Exponential	Min, Par1 (decay constant)	Max
OffOn	Min (probability of zero, p0)	

Some distributions permit optional Min or Max values, which represent truncation points. If a sample value is outside the stated range then the value is resampled until a value within range is generated.

The OffOn distribution can return a value of zero or one only, nothing else. The distributional parameter listed under “Min” is the probability p0 that it returns a value of zero. The probability of returning a value of one is automatically set to (1-p0). The OffOn distribution is often used in products of source terms using different resampling options from the rest of the distribution. One application is to determine if a cigarette is smoked or not, with a new determination every hour (ResampHours=YES and ResampDays=YES). If the result is YES, then the smoking emissions are to be sampled from a lognormal but with ResampHours=NO and ResampDays=NO. This means that whenever smoking occurs the emissions are the same.

The user may define nonstandard (custom) distributional shapes as well. These distributions are defined by the user in the *Profile Functions (Distributions)* file. All such nonstandard shapes

must be given names that start with the letter “M”. A typical name might be M1AER, as an acronym for Microenvironment #1 Air Exchange Rate. Any number of these may be defined for a model run. The custom shapes are defined in the *Profile Functions (Distributions)* file using the HISTOGRAM keyword (see Volume I). The histogram has a finite number of bins, the bin cutpoints are defined by the user. Each bin has a minimum value, a maximum value, and a probability. When returning a value from these histogram distributions, the program first determines the bin randomly. Then, a value is returned by randomly sampling uniformly from the selected bin. The HISTOGRAM keyword can also be used to define a set of discrete constant values and their corresponding probabilities by defining bins having the same maximum and minimum cutpoint values. For example, a histogram defined using the cutpoints (1, 1, 4, 4, 6, 6) defines the 5 bins (1-1, 1-4, 4-4, 4-6, 6-6). If the probabilities for these bins are assigned as (0.25, 0, 0.5, 0, 0.25), then the distribution will return only the values 1,4, or 6, with the probability of each result being 25, 50, and 25 percent, respectively.

The histogram distributions may have any number of parameters, since this depends on the number of values or bins. Therefore, in the *Microenvironment Descriptions* file, the user only has to specify the seven option indices and the distribution name (provided by the user in the *Profile Functions* file) instead of a shape. No parameters need be given.

CHAPTER 7. ESTIMATING ENERGY EXPENDITURES AND VENTILATION

Ventilation rates are used in APEX for

- Calculating exertion level for use in tabulating exposure summaries for the population
- Estimating CO dose

Ventilation does not influence the exposures for a simulated person.

Ventilation is a general term for the movement of air into and out of the lungs. Minute or total ventilation is the amount of air moved in or out of the lungs per minute. Quantitatively, the amount of air breathed in per minute (V_i) is slightly greater than the amount expired per minute (V_e). Clinically, however, this difference is not important, and by convention minute ventilation is always measured on an expired sample, V_e . Alveolar ventilation (V_a) is the volume of air breathed in per minute that (1) reaches the alveoli and (2) takes part in gas exchange. The ventilation rate needed for the %COHb calculation is this ventilation rate, V_a , and is derived for use in APEX based on work by Adams (1998), Astrand and Rodahl (1977), Burmaster and Crouch (1997), Esmail et al. (1995), Galetti (1959), Johnson (1998), Joumard et al. (1981), McCurdy (2000), McCurdy et al. (2000), Schofield (1985), and many others. Only a brief description of V_A is described below; for the complete derivation, see Johnson (2002).

Ventilation is calculated on an activity event-by-activity event basis. Ventilation is derived from the energy expenditure rate (MET, given as a multiple of resting metabolic rate), associated with the diary activities. The general steps in the estimating ventilation are

- Generate the MET event time-series based on the diary activities
- Adjust the resulting MET series for fatigue and excess post-exercise oxygen consumption
- Convert the MET time-series into a ventilation rate time series

These steps are covered in the following sections.

7.1 Generating the MET Time-Series

MET—which comes from “metabolic equivalents of task”—is a dimensionless ratio of the activity-specific energy expenditure rate to the basal or resting energy expenditure rate. While different people have very different basal metabolic rates, it is generally found that the MET ratios do not exhibit as much variability. Thus, standing still might require two times the basal energy expenditure, or two MET, for most people, with relatively little variation. Since the basal rate is constant (it only has to be determined once per profile), while the activity-specific MET ratio is calculated for each of the activities reported on the composite activity diary.

Each possible diary activity code (see Volume I), is mapped to a corresponding MET distribution in the *Activity-Specific MET* input file. This file (see Volume I) gives the properties of the MET distribution for each type of activity, in some cases as a function of age or occupation. These distributions are the same as those used in CHAD, and should not be changed. This file is read into APEX in the **DiaryModule:ReadMETS**. In the subroutine **DiaryModule:METSEval**, APEX steps through the activity diary and assigns a MET value to each event by randomly selecting a value from the appropriate distribution as defined by the activity code and the profile. The result is consider the “raw” MET time-series, which is then adjusted to be physiologically realistic. The adjustments are covered in the next section.

7.2 Adjusting the MET Time-Series for Fatigue and Excess Post-Exercise Oxygen Consumption

As discussed in the previous section, APEX assigns distributions for MET level to each diary event, based on the reported event activity (and in some cases, age and occupation). However, these raw MET time-series do not consider the sequence of the events (ie. the order in which they occur). It is well known that a person’s capacity for work will diminish as they get tired, and in practice, this means that the upper bound on MET is lowered if events in the recent past have been at unusually high MET levels. Furthermore, once high activity levels have ended, people tend to breathe heavily even while resting, as they recover their accumulated oxygen deficit. This effect is called excess post-exercise oxygen consumption (EPOC), and results in raising the MET levels above the ‘raw’ values pulled from the activity-based distributions. APEX contains an algorithm for adjusting the MET time series for both of these effects. The algorithm is implemented in **ExposureDoseModule:Ventilation**.

The adjustment method is based on keeping a running total of the oxygen deficit as a simulated individual proceeds chronologically through his or her activity diary. The oxygen deficit is the amount of energy supplied to the muscles by non-aerobic systems during exercise. It reflects a need for increased post-exercise ventilation to “pay back” this energy. The oxygen deficit calculations were derived from numerous published studies (see below).

Oxygen deficit is measured as a percentage of the maximum oxygen deficit an individual can attain prior to deterioration of exercise performance. Limitations on MET levels corresponding to post-exercise diary events were based on maintaining an oxygen deficit below this maximum value. In addition, adjustments to MET were simultaneously made for EPOC. The EPOC adjustments are based in part on the modeled oxygen deficit and in part on data from published studies on EPOC, oxygen deficit, and oxygen consumption.

The methods are constructed in terms of reserve MET, which is the amount over the basal rate (MET=1). Furthermore, we defined M as the normalized reserve, so that M=0 at MET=1, and M=1 at maximum MET:

$$M = \frac{MET - 1}{MET_{max} - 1} \quad (7-1)$$

(Recall that MET_{max} is a profile variable assigned for each simulated profile; see Section 4.3). Using a normalized reserve assures that the method can be applied identically to the entire population of profiles, each having a unique MET_{max} value.

A number of terms will be used in the description of the algorithm. They are defined below:

- MET Metabolic equivalent of task (unitless)
- MET_{max} Maximum achievable metabolic equivalent for an individual (unitless)
- M Normalized MET reserve (unitless, M , bounded between 0 and 1)
- ΔM Change in M from one diary event to the next (M)
- D_{max} Absolute maximum oxygen deficit that can be obtained (M -hr)
- F Fractional oxygen deficit (percent of individual maximum, unitless)
- t_e Duration of activity diary event (hours)
- t_r Time required to recover from an F of 1 to an F of 0 at rest (recovery time, hours)
- dF_{inc} Rate of change of F due to deficit increase (F/hr , will have a positive value)
- dF_{rec} Rate of change of F due to deficit recovery (F/hr , will have a negative value)
- dF_{tot} Total rate of change of F , $dF_{inc} + dF_{rec}$ (F/hr)
- ΔF_{inc} Increase in F due to anaerobic energy expenditure (F)
- ΔF_{rec} Decrease in F due to recovery of oxygen deficit (F)
- ΔF_{tot} Change in F due to simultaneous anaerobic work and oxygen recovery, $\Delta F_{inc} + \Delta F_{rec}$ (F)
- ΔF_{fast} Total change in F during the fast recovery phase (F)
- S_{fast} Magnitude of the rate of change in M during fast component (M/hr)
- $EPOC_{fast}$ Change in M due to fast-component EPOC (M)
- $EPOC_{slow}$ Change in M due to slow-component EPOC (M)

See Isaacs et al. (2005) for a complete derivation of the method.

7.2.1 Simulation of Oxygen Deficit

This section presents the theoretical development of the equations describing the accumulation of oxygen deficit. The method was developed using a large number of studies on oxygen consumption, oxygen deficit, and EPOC. Individual studies will be referenced below. The first two subsections below describe the equations themselves, while the last section describes the determination of the values for the model parameters.

7.2.1.1 Fast Processes

There exists a component of the accumulated oxygen deficit that is due to transition from one M level to another (McArdle et al., 2001). This component derives from the anaerobic work that is required by sudden muscular motion. There is also a corresponding fast component of oxygen recovery which occurs very quickly after a change from a high M level to a lower one. In the absence of any data to the contrary, it is assumed that these fast deficit accumulation and fast recovery processes occur at the same rate. These processes are illustrated in the Figure 7-1. The adjustment to F is equal to the area of the triangle associated with either a positive or negative change in M, normalized by the maximum obtainable accumulated oxygen deficit (D_{max}). The normalized area can thus be calculated as:

$$\Delta F_{fast} = 0.5 \frac{\Delta M |\Delta M|}{S_{fast} D_{max}} \quad (7-2)$$

where $\Delta M = M_i - M_{i-1}$ and S_{fast} is the slope of the change in M (in M/hr). Note that this change in F will be positive if ΔM is positive, and negative otherwise.

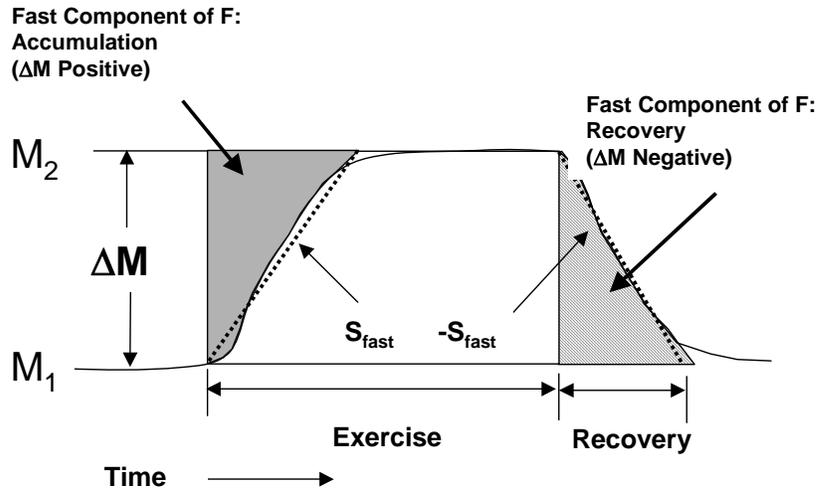


Figure 7-1. Fast Components of Oxygen Deficit and Recovery

7.2.1.2 Slow Processes

The slow component of the increase in oxygen deficit corresponds to the accumulation of deficit over a period of heavier exercise (rather than that associated with an increase in activity level). The method was derived from the analysis of a number of studies on exercise and EPOC including Bahr (1992), Bahr et al. (1987), Sedlock (1991a and 1991b), Bielinski et al. (1985), Brockman et al. (1993), Gillette et al. (1994), Gore and Withers (1990), Hagberg et al. (1980), Maehlum et al. (1986), Harris et al. (1962), Kaminsky and Whaley (1993), and Katch et al. (1972). The following data were considered: the time it took for subjects to reach exhaustion, their accumulated oxygen deficit, their MET_{max} , the MET value at which they exercised, and the corresponding normalized reserve MET (M). (Note that the MET and MET_{max} quantities were derived from the published VO_2 and VO_{2max} measurements). The data indicated that oxygen deficit accumulates at a much faster rate when M is high. For example, an M value near 0.5 requires about 5 times longer to reach exhaustion than an M value near 0.75 (on average), indicating that F is nonlinear in M .

Let the rate of increase in F be given by dF_{inc} . The relationship between dF_{inc} and M is a power law:

$$dF_{inc} = aM^b \quad (7-3)$$

where a and b were estimated from available data. The slow recovery of oxygen deficit must also be accounted for, as it occurs simultaneously with debt accumulation. A slow, but continual, process for recovering oxygen deficit is modeled, independent of the MET level. EPOC recovery as modeled constant over time until the oxygen deficit is erased. Assuming this takes t_r hours, the slow recovery of oxygen deficit occurs at a rate

$$dF_{rec} = -\frac{1}{t_r} \quad (7-4)$$

The total net rate of change in F from slow processes during an event with duration t_e is given by

$$dF_{slow} = dF_{inc} + dF_{rec} \quad (7-5)$$

and the associated change in F is

$$\Delta F_{slow} = \left(aM_i^b - \frac{1}{t_r} \right) t_e \quad (7-6)$$

For an individual starting with an F of 0 and exercising to exhaustion (neglecting the transitory effects), the change in ΔF is 1.0. In this case, rearranging and taking the logarithm gives

$$\log\left(\frac{1}{t} + \frac{1}{t_r}\right) = \log(a) + b \log(M) \quad (7-7)$$

This equation can be used to fit data to estimate the parameters a and b (this will be discussed in the next subsection).

The starting normalized oxygen deficit for the next event ($i + 1$), taking into account both the fast and slow changes in F, is then

$$F_{i+1} = F_i + \Delta F_{slow} + \Delta F_{Fast} \quad (7-8)$$

7.2.1.3 Derivation of Appropriate Values for the Model Parameters

The values of the model parameters t_r , a, and b, were derived from summaries of published data on EPOC and oxygen debt (see references listed in Section 7.2.1.2). Several of these studies reported t_r values, however, due to variability in measurement and protocol differences, these recovery times varied from 0.5 hours to 24 hours. From a modeling viewpoint, it would be unacceptable to allow recovery to significantly carry over from one day to the next. To do so could lead to a perpetual delay in recovering an oxygen deficit, for example, by repeatedly encountering new exercise events before recovery is complete. In APEX, t_r , which is a profile variable, is selected from a uniform distribution having a minimum of 8 and a maximum of 16 hours.

In APEX, a and b are modeled as a function of t_r :

$$a = 5.20 - \left(\frac{1.54}{t_r} \right) + \left(\frac{3.92}{t_r^2} \right) \quad (7-9)$$

$$b = 3.93 - \left(\frac{3.57}{t_r} \right) + \left(\frac{3.66}{t_r^2} \right) \quad (7-10)$$

These expressions were derived from the experimental data.

Appropriate distributions for maximum oxygen debt (MOD) in ml/kg were derived from data from a number of studies in adults (Gastin et al., 1995, Gastin and Lawson, 1994, Weber and Schneider, 2000, Doherty et al., 2000, Renoux et al., 1999, Roberts et al., 2003, Maxwell and Nimmo, 1996, Buck and McNaughton, 1999, Hill et al., 1998, Demarle et al., 2001, Bickham et al., 2002, Faina et al., 1997, Billat et al., 1996, Olesen, 1992) adolescents (Naughton et al., 1998) and children (Naughton and Carlson, 1993, Berthoin et al., 1996). The studies covered multiple types of exercise protocols, some having more than one protocol per study. Normal distributions for MOD were defined for all three age groups, based on average mean and standard deviation values from the studies:

- adults (>17 yrs): 54.95±14.46 (ml/kg)
- adolescents (12-17 yrs): 63.95±21.12 (ml/kg)
- children (<12 yrs): 34.74±13.10 (ml/kg)

(These mean and standard deviations are read in from the *Physiology* file; see Section 4.3.) Values are selected from normal distributions with these characteristics. These values are constant for an individual over the simulation period. The bounds of these distributions are selected as two standard deviations from the mean; these ranges were found to be reasonable when compared to reported ranges (Olesen 1992). These values are transformed to D_{max} , via a units conversion factor and the normalization needed for use with reserve MET:

$$D_{max} (M-hr) = \left(\frac{MOD}{60 METStoO_2} \right) (METs_{max} - 1)^{-1} \quad (7-12)$$

where METtoO₂ is the conversion factor for mlO₂ to MET-min, 3.5 [(mlO₂/min)/kg]/MET. Note that the variability in this factor is not addressed here.

A number of studies on EPOC (Knuttggen 1970, Harms et al., 1995, Trost et al., 1997, Dawson et al., 1996, Short and Sedlock, 1997, Pivarnik and Wilkerson, 1988, Almuzaini et al., 1998, Frey et al., 1993, Kaminsky et al., 1990, Maresh et al., 1992) were used to derive S_{fast} . These were all studies in which oxygen consumption was measured relatively soon (within a few minutes) after the end of exercise and at a frequency high enough to capture the kinetics of the change in oxygen consumption. The data were found to be relatively uniform from the minimum (0.6 MET/min) to the maximum (3.7 MET/min) slope values, and so values were selected from a uniform distribution having these bounds. Converting units and normalizing to M, one obtains:

$$S_{fast} (M/hr) = \frac{60 \text{ Uniform } (0.6, 3.7)}{(METs_{max} - 1)} \quad (7-13)$$

7.2.2 Adjustments to M for Fatigue

The equations provided in the previous section describe a method for keeping a running total of the fractional oxygen deficit (F) for each diary event for an individual. These event F values are

used to limit M for each event to appropriate values. Basically, the maximum M value that can be maintained for an entire event is the value that would result in an F_{i+1} (eq. 7-8) equal to 1 (i.e., the maximum value) at the end of the diary event. The approach used in APEX is to set M for each event equal to the raw MET value, and test if $F_{i+1} > 1$. If it is, then the M_i value is reduced by a predetermined amount (currently 0.01) and F_{i+1} is recalculated. The process continues until an appropriate value of M_i , called $M_{max,i}$ is found. As the exposure model marches through the events of the activity diary, the M values associated with each event are adjusted if necessary:

$$M_i = \min(M_i, M_{max,i}) \quad (7-14)$$

7.2.3 Adjustments to M for EPOC

As noted above, it has been observed in many studies that EPOC is characterized by both slow and fast components. The fast increase in oxygen consumption occurs within minutes of exercise, while the slow component may persist for many hours. Both fast and slow EPOC components were modeled.

7.2.3.1 Fast Processes

The fast EPOC component, which takes place in the first few minutes after exercise, is also characterized by the slope S_{fast} . The energy recovered during those first few minutes corresponds to the recovery triangle in Figure 7-1. Fast Components of Oxygen Deficit and Recovery and this increase in the rate of energy expenditure for a post-exercise event is modeled as the area of the triangle divided by the event duration:

$$EPOC_{fast} = 0.5 \frac{(\Delta M)^2}{S_{fast} t_e} \quad (7-15)$$

$EPOC_{fast}$ will thus have units of M (normalized reserve MET). The M level for the post-exercise events will be incremented by $EPOC_{fast}$.

7.2.3.2 Slow Processes

The increase in M associated with the slow EPOC component is estimated as the amount required to maintain the slow recovery of F. Since the deficit D_{max} is recovered in full in the recovery time t_r , the time-averaged adjustment to MET for the slow recovery process must be

$$EPOC_{slow} = \frac{D_{max}}{t_r} \quad (7-16)$$

Every diary event with the full rate of slow recovery will have its M value adjusted upward by $EPOC_{slow}$. An appropriate fraction of EPOC slow is used if only partial recovery is needed to eliminate the deficit (i.e., return F to 0). The final adjusted M value for the diary event is thus

$$M_{adj} = M + EPOC_{fast} + EPOC_{slow} \quad (7-17)$$

and the new MET value for the event is

$$METS_{adj} = M_{adj} (METS_{max} - 1) + 1 \quad (7-18)$$

7.3 Calculating PAI and the Ventilation Rates

APEX calculates three different ventilation rates from the adjusted MET time series. These are the expired ventilation rate (V_e) the alveolar ventilation rate (V_a), and the effective ventilation rate (EVR). All three are reported for each hour in the simulation in the APEX output files. V_a is used in the CO dose calculations, and EVR is used in compiling summary exposure tables for different populations during different levels of exertion.

In addition, the final MET time-series is used to calculate a physical activity index (PAI) for each individual. Finally, an intermediate rate, oxygen consumption (VO_2), is also calculated. The equations for calculating these rates from the MET time series are given below. All of these calculations are implemented in **ExposureDoseModule:Ventilation**.

7.3.1 Calculating PAI and Energy Expenditure

Once the final MET time series is calculated, the hourly physical activity index (PAI) for each hour in the simulation for the simulated individual is calculated as the time-weighted average of MET:

$$PAI_{hour} = \frac{\sum_{i=1}^{N_{events}} (METS_i)(t_i)}{60} \quad (7-19)$$

where $METS_i$ is the MET value for event i and t_i is the event duration in minutes. The daily PAI value is simply the average of the 24 hourly values. Finally, a median daily PAI value is calculated for each profile. The daily and median daily PAI values are saved as a profile variables (see Section 4.3). The median daily PAI value is used in the characterization of persons as “active” when creating the output exposure summary tables (see Volume I and Section 8.2).

The hourly energy expenditure (kcal/min) is

$$EE = PAI_{hour} \times RMR \quad (7-20)$$

where RMR is the profile resting metabolic rate in kcal per minute. The hourly EE is written to the *Hourly Energy Expenditure* output file.

7.3.2 Calculating Oxygen Consumption and Ventilation Rates

The oxygen consumption rate in ml/min/kg (McCurdy, 2000), normalized to body mass, is given by

$$VO_2 = \frac{METS \times ECF \times RMR}{BM} \quad (7-21)$$

where ECF is the profile energy conversion factor in liters of oxygen per kcal and BM is the profile body mass. The alveolar ventilation rate is also calculated from MET using:

$$V_a = METS \times 19630 \times ECF \times RMR \quad (7-22)$$

where the constant 19630 is the oxygen to air conversion factor (19,630 ml of air/l of O₂).

The calculation of V_e is based on the VeSlope, VeResid, and VeInter profile variables (see Section 4.3). The calculation of those variables and the following equations for V_e comprise the V_e regression equations derived by Graham and McCurdy (2005). V_e is calculated as

$$V_e = BM(e^X) \quad (7-23)$$

where BM is the profile body mass and the exponent term X is given by

$$X = VeInter + VeSlope(VO_2) + Z(VeResid) \quad (7-24)$$

where Z is a random number pulled from a normal distribution every event. EVR is then

$$EVR = \frac{V_e}{BSA} \quad (7-25)$$

where BSA is the profile body surface area.

Using the above equations, APEX generates an event time-series for Ve and Va and EVR. Ve and Va are output on the *Events* output file. Hourly values (time-weighted hourly averages of the event values) for EVR, Va, Ve, are calculated and written to the corresponding hourly output files (see Volume I).

CHAPTER 8. CALCULATING EXPOSURES

Below is a description of how the microenvironment concentrations and other information are used by APEX to estimate exposure (see step 6 in Figure 2-1a. Overview of APEX, Part 1), and how the model then presents and summarizes the exposure results. Exposures are calculated in **ExposureDoseModule:ExposureDose**.

8.1 Estimating Exposure

For inhaled pollutants such as the ones APEX models, exposure is defined as the time integrated concentration of the pollutant in the breathing zone of a person. We refer to the concentration to which a person is exposed as the *exposure concentration*. This concentration is assumed to be approximately spatially uniform within each microenvironment and also approximately temporally uniform for the duration of any one activity event (at most one hour). A time series of exposure concentrations can be constructed by following the sequence of microenvironments visited according to the composite activity diary assembled for the target profile.

As an example, assume the activity diary indicates that the first 40 minutes of the simulation are spent in microenvironment #3, the next 20 minutes in microenvironment #2, and the next 60 minutes in microenvironment #5, and so on. Then the exposure time series has its first 40 minutes at the concentration for hour 1 in microenvironment #3, the next 20 minutes at the concentration for hour 1 in microenvironment #2, and the next 60 minutes at the concentration for hour 2 in microenvironment #5, and so on. The exposure itself depends neither on the activities that the person is performing nor on any personal physiological properties.

The user may select the units for reporting the exposure output. Either ppm or $\mu\text{g}/\text{m}^3$ may be chosen. This applies both to concentration and to exposure. It also applies to the levels used as cutpoints in the various exposure tables. The parameter **OutputUnits** in the *Simulation Control* file controls this; if set to PPM (actually, to anything beginning with “P”) then parts per million (ppm) are used, otherwise micrograms per cubic meter ($\mu\text{g}/\text{m}^3$) are used.

APEX calculates exposure as a time series of exposure concentrations that a simulated individual experiences during the simulation period. APEX calculates the exposure by identifying the concentrations in the microenvironments visited by the person according to the composite activity diary. In this manner, a time-series of event exposures are found. Then, the hourly exposure concentration at any clock hour during the simulation period is calculated using the following equation:

$$C_i = \frac{\sum_{j=1}^N (C_{\text{hourly}(j)} t_{(j)})}{T} \quad (8-1)$$

where:

C_i = Hourly exposure concentration at clock hour i of the simulation period ($\mu\text{g}/\text{m}^3$ or ppm)

N	=	Number of events (i.e., microenvironments visited) in clock hour i of the simulation period.
$C_{\text{hourly } (j)}$	=	Hourly concentration in microenvironment j ($\mu\text{g}/\text{m}^3$ or ppm)
$t_{(j)}$	=	Time spent in microenvironment j (minutes)
T	=	60 minutes

From the hourly exposures, APEX calculates time series of 8-hour and daily average exposure concentrations that a simulated individual would experience during the simulation period. APEX then statistically summarizes and tabulates the hourly, 8-hour, and daily exposures.

8.2 Exposure Summary Statistics

The exposure time series provides a wealth of detail on the exposure experienced by each profile. However, it is difficult to analyze since the number of events differs for each profile and even the number of events on any given calendar day is unpredictable. Also, a model run may consist of thousands of profiles, so it is not practical to retain the exposure time series for all profiles in memory. For output tables and for analysis, summaries of the exposure time series are required.

The first step in summarizing exposure is to calculate the time series of event-level and hourly average exposures for the profile. The event exposures are written to the *Events* output file (if the *Simulation Control* file setting **EventsOut** = YES), while the hourly values are written to the *Hourly Exposure* output file (if the *Simulation Control* file setting **HourlyExp** = YES). The hourly values are used to derive most of the other exposure summary statistics.

There is one other exposure time series reported on an hourly basis, namely the series of running eight hour averages. This is stored in another vector. For the first seven hours of the simulation the averages are taken over fewer than eight values, otherwise it is always the current hour and the previous seven hours. These hours may cross day, month, or even yearly boundaries.

There are three exposure statistics tabulated on a daily basis. The first is the daily average exposure or **DAvgExp**. This is the arithmetic mean of the 24 values of hourly exposures that fall on a given calendar day. Note that all days contain 24 hours in APEX; the effect of Daylight Savings Time is removed from the model. The daily average exposure is then binned into levels according to the cutpoints provided by the user in the *Simulation Control* file. For example, the input line

DAvgExp = 2, 5, 8, 12, 20

indicates that the first bin for daily average exposure extends from 0.0 to 2.0 (ppm or $\mu\text{g}/\text{m}^3$), and the second bin from 2.0 to 5.0, et cetera. The final or sixth bin in this example contains all values over 20.0. The number of days at each level is recorded for each profile.

The second daily exposure statistic is the maximum 1-hour average for each calendar day, or **DMIHExp** in the code (for Daily Maximum 1-Hour Exposure). It is the highest of the 24 hourly values on each day. Like DAvgExp, these are also converted to bins or levels using cutpoints from the *Simulation Control* input file. The number of days at each level is recorded for each profile.

The final daily summary statistic for exposure is ***DM8HExp*** which is the Daily Maximum 8-Hour Exposure. It is the largest of the 24 8-hour running averages for each calendar day. As for the other daily statistics, it is also binned into levels and recorded for each profile.

The average exposure over the entire simulation period is also calculated. As for the daily summary statistics, the average exposure is binned using the cutpoints designated in the *Simulation Control* input file by ***SAvgExp***.

In addition to the exposure statistics described above, there are a few others that are derived directly from the event-based exposure time series. The variable ***TimeExp*** represents the number of minutes spent in each bin in each micro, based not on hourly averages but on the original event exposures. Again, the cutpoints for the *TimeExp* bins are provided by the user in the *Simulation Control* input file.

The user can also set a threshold exposure level in the *Simulation Control* file. This variable is called ***AlertThresh***. If the exposure time series exceeds *AlertThresh* for any event then the following three things occur. First, the count of high exposure events for this profile is incremented by one. Second, the total duration over the threshold exposure is incremented by the duration of this event. Third, the exposure is checked to see if it exceeds the maximum exposure previously experienced by this profile. These results are reported in the *Log* file for the model run for each profile that exceeds the threshold.

8.3 Exposure Summary Tables

APEX writes out up to 76 different exposure summary tables for the statistics described above. The content and interpretation of these tables (including examples) are covered in Volume I. There are 8 basic types of tables; the tables are written to the *Tables* file (and optionally the *Log* file) in **ExposureDoseModule:Output**:

1. Minutes in each Exposure Interval by Microenvironment (***TimeExp***)
2. Minutes at or above each Exposure Level by Microenvironment (***TimeExp***)
3. Person-Days at or above each Daily Maximum 1-Hour Exposure Level (***DMIHExp***)
4. Person-Days at or above each Daily Maximum 8-Hour Exposure Level (***DM8HExp***)
5. Number of Simulated Persons with Multiple Exposures at or above each Daily Maximum 1-Hour Exposure Level (***DMIHExp***)
6. Number of Simulated Persons with Multiple Exposures at or above each Daily Maximum 8-Hour Exposure Level (***DM8HExp***)
7. Person-Days at or above each Daily Average Exposure Level (***DAvgExp***)
8. Persons at or above each Overall Average Exposure Level (***SAvgExp***)

The levels written to each table are given by the *Simulation Control* file settings in parentheses. The definition of terms in the titles of these tables are as follows:

- **Person-day**: A single simulated day for one simulated individual. A 100-day simulation of 10 persons contains 1000 person-days, as does a single-day simulation of 1000 persons. APEX in general counts exposures in Person-days. Multiple exposures (at a single level) during single day are counted as one Person-day of exposure.

- **Multiple Exposures:** Multiple exposures for the same person on different simulation days. This term refers to multiple person-days of exposure in a simulation corresponding to the same profile.

Table types 1-2 and 7-8 are generated only once, for the entire population. Tables 3-6 are generated for six population subgroups, under three exertion levels. The six population subgroups are as follows:

1. **All Persons.** The table statistics are based on the entire population.
2. **Children.** The table statistics are based on the population of children, as defined by the age range given by the *Control* file settings **ChildMin** and **ChildMax**.
3. **Active Persons.** The table statistics are based on the population of people having a median Physical Activity Index (PAI, mean METS) over the whole simulation period that exceeds the value designated by the *Control* file setting **ActivePAI**.
4. **Active Children.** The table statistics are based on the population of active children, as determined by the *Control* file settings **ChildMin**, **ChildMax**, and **ActivePAI**.
5. **Ill Persons.** The table statistics are based on the population of ill people. The population is determined by the probabilities given in the *Prevalence* file. This population is only considered if the input variable **Disease** is set in the *Control* file.
6. **Ill Children.** The table statistics are based on the population of ill people. The population is determined by the probabilities given in the *Prevalence* file and the *Control* file settings **ChildMin** and **ChildMax**. This population is only considered if the input variable **Disease** is set in the *Control* file.

The three exertion levels are:

1. **All Exertion Conditions.** The table statistics are based on exposures experienced by the population subgroup under any ventilatory conditions.
2. **Moderate Exertion.** The table statistics are based on exposures experienced by the population subgroup only during periods in which their average equivalent ventilation rate (EVR) is in the “moderate” range. The period of time during which EVR is averaged is either 1 hours or 8 hours, based on the table being generated. The “moderate” EVR ranges are defined by the *Simulation Control* file settings **ModEVR1** and **HeavyEVR1** (for 1-hour exposures) and **ModEVR8** and **HeavyEVR8** (for 8-hour exposures). An individual’s EVR is in the moderate range if it is greater than or equal to the **ModEVR#** setting and less than the **HeavyEVR#** setting for the exposure period.
3. **Heavy Exertion.** The table statistics are based on exposures experienced by the population subgroup only during periods in which their average equivalent ventilation rate (EVR) is in the “heavy” range. The period of time during which EVR is averaged is either 1 hours or 8 hours, based on the table being generated. The “heavy” EVR ranges are defined by the *Simulation Control* file settings **HeavyEVR1** (for 1-hour exposures) and **HeavyEVR8** (for 8-hour

exposures). An individual's EVR is in the heavy range if it is greater than or equal to the **HeavyEVR#** setting for the exposure period.

The exertion level statistics are calculated in the following manner: For each day in the simulation, the mean EVR level during every one hour and running eight hour time period is calculated. If the mean 1-hour or 8-hour EVR is higher than the EVR levels indicated (in the *Simulation Control* file) for moderate or heavy exertion, then the exposure during the same time period is compared with the levels given in the *Simulation Control* file, and the statistics and tables are updated if the exposure exceeds the level.

NOTE: Many of the tables can include statistics at the 0.0 exposure level, if it is indicated on the *Simulation Control* file. This can be used to obtain some useful statistics (such as total final study area of the subpopulation population), since all persons will have exposures equal to or exceeding 0.0 level exposures on all person-days. However, use caution in examining these "0.0" level statistics in the case of the exertion-level tables. If a simulated person has no 1-hour or 8-hour periods at Moderate or Heavy EVR, then they will NOT have an exposure in that table for the 0.0 level, and the 0.0 level statistics will not correspond to the entire subpopulation.

CHAPTER 9. CALCULATING CARBON MONOXIDE (CO) DOSE

APEX4 contains algorithms for estimating dose of the pollutant CO. The term “dose” refers to some measure of the amount of pollutant in the body of the target person. The situation is not as clear as for exposure since there are numerous specific definitions of dose that are used in various contexts. For an airborne pollutant, dose could refer to the amount inhaled, or the amount currently in the lungs, or the amount crossing from the lungs to the body, or the total amount in the body, or the total in some specific target organ, or a number of other things. For some pollutants, such as CO, the toxicokinetics are sufficiently understood such that dose can be modeled in addition to the exposure concentration. Dose may be more useful or accurate than exposure for evaluating the effects of air pollutants because it accounts better for differences in pollutant uptake resulting from (1) the variation in physiology and activities across populations and (2) the variation in physiological responses to activities within an individual. In APEX dose is only defined for carbon monoxide (CO), and it refers to the percent of carboxyhemoglobin (%COHb) in the blood. Carboxyhemoglobin is hemoglobin that has carbon monoxide instead of the normal oxygen bound to it. When the APEX model is extended to other pollutants, it will likely require the development of specific dose algorithms for each new pollutant, or at least for each class of pollutant.

The calculation of dose is complex. It starts with the exposure time series, which indicates the pollutant concentration in the inhaled air at each moment in time. It also requires the ventilation rate which is activity dependent, knowledge of a number of physiological parameters, and the %COHb level depends not only on current conditions but on recent history as well. The discussion of physiological parameters is in the chapter on personal profiles. The ventilation algorithm is discussed in the next section, followed by the algorithm for the %COHb calculation. The final topic relating to dose is the explanation of the summary statistics for reporting dose.

In APEX, dose is the delivered dose of CO as measured by the biotransformation product carboxyhemoglobin (COHb)—specifically %COHb—in the blood. The estimated %COHb, in addition to being a more refined measure of exposure compared to exposure concentration, is useful for comparing to health-based benchmarks of %COHb. A normal carboxyhemoglobin level is less than two percent for non-smokers. Overt signs of toxic effects usually appear at carboxyhemoglobin levels of 15 to 20 percent, and a level of 25 percent is an index of severe poisoning, which may lead to sudden loss of consciousness.

Conceptually, APEX uses a number of factors, in particular a time series estimate of alveolar ventilation rate V_a (which is activity and physiology dependent) and a time-series estimate of exposure (which indicates the pollutant concentration in the inhaled air for specific moments in time), to calculate %COHb. The ventilation rate algorithm is discussed in Section 7.3 and the %COHb algorithm is discussed in the following subsections. For other factors and additional detail, see Johnson (2002).

9.1 Carboxyhemoglobin (COHb) Calculation

The %COHb calculation in APEX uses the time series for exposure (CO concentration in the air) and the time series for alveolar ventilation rate, V_A , as inputs (among other factors). The dose calculation is based on the solution to the non-linear Coburn, Forster, Kane (CFK) equation, as detailed in Johnson (2002). As pointed out by that report, the CFK equation does not have an explicit solution, so an iterative solution or approximation is needed to calculate the %COHb. An iterative solution, however, was determined to be unsuitable because of the model execution time necessary (a typical model run of one calendar year represents roughly 14,000 events per person and several thousand people, or tens of millions of diary events). Therefore, the CFK equation is solved using a modified Taylor's series method in which the event duration is restricted in time (if necessary) to ensure convergence with only a few terms. This method avoids the dangers of non-convergence that arise in some other methods.

As the mathematical derivation in the above report is very detailed, only the main results are presented here. First, it should be noted that the literature discusses two forms of the CFK equation, namely a linear and a non-linear form. The linear form itself is an approximation that allows an explicit solution, but is not accurate under all conditions. The non-linear form is considered to be more correct and is the one being discussed here.

Restricting %COHb(t) to between 0 and 100 (percent), the CFK equation takes the form of the following differential equation:

$$\%COHb'(t) = C_0 - C_1 \times \frac{\%COHb(t)}{100 - \%COHb(t)} \quad (9-1)$$

where C_0 and C_1 are constants over the duration of one event that depend on physical and physiological parameters, including V_a and the CO concentration in the air. C_0 is given by

$$C_0 = \frac{Endgn + P_{CO}/B}{RHB_0 + Blood} \quad (9-2)$$

where Endgn and Blood are physiological profile variables (Section 4.3). P_{CO} is the partial pressure of CO (torr)

$$P_{CO} = P_{gases} \times Exposure \times 10^{-6} \quad (9-3)$$

where Exposure is the event CO exposure concentration and P_{gases} is the partial pressure (torr) of dry gases at the study altitude (EPA, 1978):

$$P_{gases} = 760e^{-0.0000386Altitude} - 47 \quad (9-4)$$

where altitude is in feet. The variable RHB_0 is the total reduced blood hemoglobin level (ml O₂ or ml CO per ml blood), adjusted for altitude (as in EPA, 1978)

$$RHB_0 = 1.39 \times 0.01 \times 0.995 \times Hmg1b \left(1 + \frac{2.76e^{0.0001429 \text{Altitude}}}{100} \right) \quad (9-5)$$

where Hmg1b is the profile variable for hemoglobin density. The factor B is given by

$$B = \frac{1}{DIFF} + \frac{P_{gases}}{V_a} \quad (9-6)$$

V_a is the event alveolar ventilation (see Section 7.3.2) and DIFF is lung CO diffusivity (ml/min/torr) adjusted for ventilation rate

$$DIFF = Diff + 0.000845V_a - 5.7 \quad (9-7)$$

where Diff is the CO diffusivity profile variable (which corresponds to a baseline ventilation).

The constant C_1 is given by

$$C_1 = \frac{1 + 0.32 \times PO_2}{69.76 \times RHB_0 \times Blood} \quad (9-8)$$

where PO_2 is the partial pressure of oxygen in the lungs (torr)

$$PO_2 = 0.209P_{gases} - 49 \quad (9-9)$$

See Johnson et al. (2002) for a detailed derivation of the above equations for C_1 and C_2 .

Time zero represents the start of the current event. The concentration $\%COHb(0)$ (at time zero) is assumed to be known. The first derivative, $\%COHb'(0)$, can easily be found from the above equation. The solution $\%COHb(t)$ is a smoothly varying function of time without sudden discontinuities or changes in slope. It therefore can be expanded in a Taylor's series about $t = 0$, which should converge fairly rapidly. One simplification is to rescale the time variable to the unitless parameter z :

$$z = \frac{(C_0 + C_1) \times t}{(100 \times D_0 \times D_0)} \quad (9-10)$$

where

$$D_0 = \frac{1 - \%COHb(0)}{100} \quad (9-11)$$

The Taylor's series up to the fourth order term is:

$$T_4(z) = \%COHb(0) + 100 \times D_0 \times Dz - \frac{100 \times A_1 \times D_0 \times Dz^2}{2} +$$

$$\frac{100 \times A_1 \times D_0 \times D \times (A_1 - 2D) \times z^3}{6} +$$

$$\frac{100 \times A_1 \times D_0 \times D \times (A_1^2 - 8DA_1 + 6D^2) \times z^4}{24} \quad (9-12)$$

where

$$A_1 = \frac{C_1}{C_0 + C_1} \quad (9-13)$$

$$D = D_0 - A_1 \quad (9-14)$$

For typical values for the constants C_0 , C_1 , and %COHb(0), convergence occurs for $z < 1$. For z values below this limit but still close to one, the convergence is slow, so the terms beyond fourth order would be needed if high accuracy were desired. It is found that $z < 1$ generally corresponds to %COHb(0) values below 40 to 50% for one-hour events.

The z value is proportional to t . In APEX, an event can have a duration of no more than one hour. For one hour events there are conditions where z is close to one and convergence of the Taylor's series may require more than four terms. However, it is not necessary to evaluate the entire hour in one step. By dividing the event into shorter subevents, each will have a smaller z value. For example, if a one-hour activity diary event has initial conditions that correspond to $z=0.9$, then by dividing this into three 20 minute subevents, each will have a z value around 0.3. Actually, the first subevent will have exactly $z=0.3$. The others will be slightly different as the initial conditions for those subevents will have changed slightly. In practice, a dimensionless subevent duration is used, and all the subevents have equivalent length. An accumulated dose is calculated as the running sum of the average %COHb level over the subevents. At the end of all subevents, the average dose is this accumulated dose divided by the number of subevents while the final value of the dose is simply the final value of COHb itself. These values are saved and the next diary event is processed.

9.2 Definition of Dose Summary Statistics

The dose in APEX is only defined for carbon monoxide, in which case it refers to the %COHb level. If APEX is run for some other pollutant, no dose calculation is available. Since it would be meaningless to calculate %COHb in that case, a flag called **DODOSE** is available in the *Simulation Control* file. The default is DODOSE = YES. If DODOSE = NO then the dose calculation in APEX is skipped.

If the dose calculation is performed, the initial result is the dose or %COHb level for each event in the simulation. Unlike exposure, there are actually three doses calculated per event. The first is the time-average dose over the event. The second is the running 8-hour average of event doses. The third is the final instantaneous dose at the end of the event. The final dose is found directly using the series $T_4(z)$ given in the previous section. The average dose is easily found since $T_4(z)$ is a polynomial in time and therefore can be integrated without difficulty.

Most of the summary statistics for dose are analogous to those for exposure. The average dose values over an event and the instantaneous dose at the end of the event are written to *Events* output file (if it exists). Hourly-average dose time series is created by taking duration-weighted averages of dose over the events in each clock hour. This is written to the *Hourly Dose* output file. A vector of instantaneous dose at the end of each hour (FDose) is also saved, for the calculation of a daily statistic for maximum end-of-hour dose (see next section). This is not an average, but simply a subset of the values of the event-end dose corresponding to the events that end on a clock hour.

There are four daily summary statistics for dose. The first is ***DAvgDose*** (Daily Average Dose) which is the average of the 24 hourly average dose values that fall on the same calendar day. The result for each day is binned according to the levels defined by the cutpoints set in the *Simulation Control* file. The second summary statistic is ***DMIHDose*** (Daily Maximum 1-Hour Dose) which is the largest of the 24 hourly dose values for a day. The third is ***DM8HDose*** (Daily Maximum 8-Hour Dose) which is the largest of the 24 8-hour running dose averages. The fourth is ***DMEHDose*** (Daily Maximum End-of-Hour Dose), which is the largest of the 24 values of the instantaneous dose level at the end of each clock hour on a day. All four daily summaries are binned according to the appropriate set of cutpoints in the *Simulation Control* file. Finally, there is the average dose over the entire simulation period, ***SAvgDose***. It too is binned and tabulated according to cutpoints set in the *Simulation Control* file.

REFERENCES

- Adams WC. 1998. Letter to Tom McCurdy, National Exposure Research Laboratory, U.S. Environmental Protection Agency, Research Triangle Park, North Carolina. August 21.
- Almuzaini KS, Potteiger JA, and Green SB. 1998. Effects of split exercise sessions on excess postexercise oxygen consumption and resting metabolic rate. *Can J Appl Physiol.* 23(5):433-43.
- Astrand PO and Rodahl K. 1977. *Textbook of Work Physiology.* 2nd ed. McGraw-Hill, New York, New York.
- Bahr R, Ingnes I, Vaage O, Sejersted OM, and Newsholme EA. 1987. Effect of duration of exercise on excess postexercise O₂ consumption. *J Appl Physiol.* 62(2):485-90.
- Bahr R. 1992. Excess postexercise oxygen consumption--magnitude, mechanisms and practical implications. *Acta Physiol. Scand Suppl.* 605:1-70.
- Berthoin S, Baquet G, Dupont G, Blondel N, and Mucci P. 1996. Critical velocity and anaerobic distance capacity in prepubertal children. *Can J Appl Physiol.* 28(4):561-75.
- Bickham D, Le Rossignol P, Gibbons C, and Russell AP. 2002. Re-assessing accumulated oxygen deficit in middle-distance runners. *J Sci Med Sport.* 5(4):372-82.
- Bielinski R, Schutz Y, and Jequier E. 1985. Energy metabolism during the postexercise recovery in man. *Am J Clin Nutr.* 42(1):69-82.
- Billat V, Beillot J, Jan J, Rochcongar P, and Carre F. 1996. Gender effect on the relationship of time limit at 100% VO₂max with other bioenergetic characteristics. *Med Sci Sports Exerc.* 28(8):1049-55.
- Biller WF, Feagans TB, Johnson TR, Duggan GM, Paul RA, McCurdy T, and Thomas HC. 1981. A general model for estimating exposure associated with alternative NAAQS. Paper No. 81-18.4 in *Proceedings of the 74th Annual Meeting of the Air Pollution Control Association, Philadelphia, Pa.*
- Box G, Jenkins G, and Reinsel G. 1994. *Time Series Analysis: Forecasting and Control,* Prentice Hall, Englewood Cliffs, NJ.
- Brockman L, Berg K, and Latin R. 1993. Oxygen uptake during recovery from intense intermittent running and prolonged walking. *J Sports Med Phys Fitness.* 33(4):330-6.
- Buck D and McNaughton L. 1999. Maximum accumulated oxygen debt must be calculated using 10 min time periods. *Med Sci Sports Exerc.* 31(9):1346-1349.
- Burmester DE and Crouch EAC. 1997. Lognormal distributions of body weight as a function of age for males and females in the United States, 1976 – 1980. *Risk Analysis* 17(4).
- Burmester DE. 1998. LogNormal distributions for skin area as a function of body weight. *Risk Analysis.* 18(1):27-32.

- Carlson JS and Naughton GA. 1993. An examination of the anaerobic capacity of children using maximum accumulated oxygen debt. *Pediatr Exerc Sci.* 5:60-71.
- Dawson B, Straton S, and Randall N. 1996. Oxygen consumption during recovery from prolonged submaximum cycling below the anaerobic threshold. *J Sports Med Phys Fitness.* 36:77-84.
- Demarle AP, Slawinski JJ, Laffite LP, Bocquet VG, Koralsztein JP, and Billat VL. 2001. Decrease of O₂ deficit is a potential factor in increased time to exhaustion after specific endurance training. *J Appl Physiol.* 90(3):947-53.
- Doherty M, Smith PM, and Schroder K. 2000. Reproducibility of the maximum accumulated oxygen deficit and run time to exhaustion during short-distance running. *J Sports Sci.* 18(5):331-8.
- EPA 1978. Altitude as a Factor in Air Pollution. Environmental Criteria and Assessment Office. EPA-600/9-78-015.
- EPA 1999. Total Risk Integrated Methodology. Website: <http://www.epa.gov/ttnatw01/urban/trim/trimp.html>.
- EPA. 2002. Consolidated Human Activities Database. Website: <http://www.epa.gov/chadnet1/>.
- Esmail S, Bhambhani Y, and Brintnell S. 1995. Gender differences in work performance on the Baltimore therapeutic equipment work simulator. *Amer. J. Occup. Therapy.* 49: 405 - 411.
- Faina M, Billat V, Squadrone R, De Angelis M, Koralsztein JP, and Dal Monte A. 1997. Anaerobic contribution to the time to exhaustion at the minimal exercise intensity at which maximum oxygen uptake occurs in elite cyclists, kayakists and swimmers. *Eur J Appl Physiol. Occup Physiol.* 76(1):13-20.
- Frey GC, Byrnes WC, and Mazzeo RS. 1993. Factors influencing excess postexercise oxygen consumption in trained and untrained women. *Metabolism.* 42(7):822-828.
- Galetti, P. M. 1959. Respiratory exchanges during muscular effort. *Helv. Physiol. Acta.* 17: 34 - 61.
- Gastin PB, Costill DL, Lawson DL, Krzeminski K, and McConell GK. 1995. Accumulated oxygen deficit during supramaximum all-out and constant intensity exercise. *Med Sci Sports Exerc.* 27(2):255-63.
- Gastin PB and Lawson DL. 1994. Variable resistance all-out test to generate accumulated oxygen deficit and predict anaerobic capacity. *Eur J Appl Physiol. Occup Physiol.* 69(4):331-6.
- Gillette CA, Bullough RC and Melby CL. 1994. Postexercise energy expenditure in response to acute aerobic or resistive exercise. *Int J Sport Nutr.* 4(4):347-60.

Glen G and Smith L. 2005. A New Method of Longitudinal Diary Assembly. Memorandum submitted to the U.S. Environmental Protection Agency under EPA Contract No. 68-D-00-206. Alion Science & Technology, Inc.

Gore CJ and Withers RT. 1990. Effect of exercise intensity and duration on postexercise metabolism. *J Appl Physiol.* 68(6):2362-8.

Graham S and McCurdy T. 2005. Revised Ventilation Rate (V_e) Equations for Use in Inhalation-Oriented Exposure Models, A NERL Internal Research Report.

Hagberg JM, Hickson RC, Ehsani AA, and Holloszy JO. 1980. Faster adjustment to and recovery from submaximum exercise in the trained state. *J Appl Physiol.* 48(2):218-24.

Harms CA, Cordain L, Stager JM, Sockler JM, and Harris M. 1995. Body fat mass affects postexercise oxygen metabolism in males of similar lean body mass. *Med Exer Nutr Health.* 4:33-39.

Harris JM, Hobson EA, and Hollingsworth DF. 1962. Individual variations in energy expenditure and intake. *Proc Nutr Soc.* 21: 157-169.

Hill DW, Ferguson CS, and Ehler KL. 1998. An alternative method to determine maximum accumulated O₂ deficit in runners. *Eur J Appl Physiol. Occup Physiol.* 79(1):114-7.

Isaacs K and Smith L. 2005. New Values for Physiological Parameters for the Exposure Model Input File Physiology.txt. Memorandum submitted to the U.S. Environmental Protection Agency under EPA Contract EP-D-05-065. NERL WA 10. Alion Science and Technology.

Isaacs K, Glen G, and Smith L. 2005. Theoretical Development of a Unified Algorithm for Adjusting METS Values in Human Exposure Modeling for Fatigue and EPOC. Memorandum submitted to the U.S. Environmental Protection Agency under EPA Contract No. 68-D-00-206. Alion Science and Technology.

Johnson T, Mihlan G, LaPointe J, Fletcher K, Capel J, Rosenbaum A, Cohen J, Stiefer P. 2000. Estimation of carbon monoxide exposures and associated carboxyhemoglobin levels for residents of Denver and Los Angeles using pNEM/CO. Appendices. EPA contract 68-D6-0064.

Johnson T. 1998. Analysis of Clinical Data Provided by Dr. William Adams and Revisions to Proposed Probabilistic Algorithm for Estimating Ventilation Rate in the 1998 Version of pNEM/CO. Memorandum submitted to the U.S. Environmental Protection Agency under EPA Contract No. 68-D6-0064. TRJ Environmental, Inc.

Johnson T. 2002. A Guide to Selected Algorithms, Distributions, and Databases Used in Exposure Models Developed By the Office of Air Quality Planning and Standards. Revised Draft. Prepared for U.S. Environmental Protection Agency under EPA Grant No. CR827033.

Johnson T, Capel J, Mozier J, and McCoy M. 1996b. Estimation of Ozone Exposures Experienced by Outdoor Children in Nine Urban Areas Using a Probabilistic Version of NEM. Report prepared for the Air Quality Management Division under Contract No. 68-DO-30094, April.

- Johnson T., Capel J, McCoy M and Mozier J. 1996c. Estimation of Ozone Exposures Experienced by Outdoor Workers in Nine Urban Areas Using a Probabilistic Version of NEM. Report prepared for the Air Quality Management Division under Contract No. 68-DO-30094, April.
- Johnson T, Capel J, and McCoy M. 1996a. Estimation of Ozone Exposures Experienced by Urban Residents Using a Probabilistic Version of NEM and 1990 Population Data. Report prepared by IT Air Quality Services for the Office of Air Quality Planning and Standards, U.S. Environmental Protection Agency, Research Triangle Park, North Carolina.
- Johnson T, Capel J, Olaguer E, Wijnberg L. 1992. Estimation of Ozone Exposures Experienced by Residents of ROMNET Domain Using a Probabilistic Version of NEM. Report prepared by IT Air Quality Services for the Office of Air Quality Planning and Standards, U. S. Environmental Protection Agency, Research Triangle Park, North Carolina.
- Johnson TR and Paul RA. 1983. The NAAQS Exposure Model (NEM) Applied to Carbon Monoxide. EPA-450/5-83-003. Prepared for the U.S. Environmental Agency by PEDCo Environmental Inc., Durham, N.C. under Contract No. 68-02-3390. U.S. Environmental Protection Agency, Research Triangle Park, N.C.
- Joumard R, Chiron M, Vidon R, Maurin M, and Rouzioux J-M. 1981. Mathematical models of the uptake of carbon monoxide on hemoglobin at low carbon monoxide levels. *Environmental Health Perspectives*. 41: 277 - 289.
- Kaminsky LA, and Whaley MH. 1993. Effect of interval-type exercise on excess post-exercise oxygen consumption in obese and normal-weight women. *Med Exer Nutr Health*. 2:106-111.
- Kaminsky LA, Padjen S, and LaHam-Saeger. 1990. J Effect of split exercise sessions on excess post-exercise oxygen consumption. *Br J Sports Med*. 24(2):95-8.
- Katch FI, Girandola RN, and Henry FM. 1972. The influence of the estimated oxygen cost of ventilation on oxygen deficit and recovery oxygen intake for moderately heavy bicycle ergometer exercise. *Med Sci Sports*. 4:71-76.
- Klepeis N, Tsang A, and Behar JV. 1995. Analysis of the National Human Activity Pattern Survey (NHAPS) respondents from a standpoint of exposure assessment. National Exposure Research Laboratory, U.S. Environmental Protection Agency, Las Vegas, NV.
- Knuttgen HG. 1970. Oxygen debt after submaximum physical exercise. *J Appl Physiol*. 29(5):651-657.
- Maehlum S, Grandmontagne M, Newsholme EA, and Sejersted OM. 1986. Magnitude and duration of excess postexercise oxygen consumption in healthy young subjects. *Metabolism*. 35(5):425-9.
- Maresh CM, Abraham A, De Souza MJ, Deschenes MR, Kraemer WJ, Armstrong LE, Maguire MS, Gabaree CL, and Hoffman JR. 1992. Oxygen consumption following exercise of moderate intensity and duration. *Eur J Appl Physiol. Occup Physiol*. 65(5):421-6.

- Maxwell NS and Nimmo MA. 1996. Anaerobic capacity: a maximum anaerobic running test versus the maximum accumulated oxygen deficit. *Can J Appl Physiol.* 21(1):35-47.
- McArdle WD, Katch FI, and Katch VL. 2001. *Exercise Physiology: Energy, Nutrition, and Human Performance*, Fifth Edition. Lippincott, Williams, and Wilkins, Philadelphia.
- McCurdy T. 2000a. Conceptual Basis for Multi-Route Intake Dose Modeling Using an Energy Expenditure Approach. *Journal of Exposure Analysis and Environmental Epidemiology.* 10:1 - 12.
- McCurdy T, Glen G, Smith L, and Lakkadi Y. 2000b. The National Exposure Research Laboratory's Consolidated Human Activity Database, *Journal of Exposure Analysis and Environmental Epidemiology* 10: 566-578.
- Naughton GA, Carlson JS, Buttifant DC, Selig SE, Meldrum K, McKenna MJ, and Snow RJ. 1998 Accumulated oxygen deficit measurements during and after high-intensity exercise in trained male and female adolescents. *Eur J Appl Physiol. Occup Physiol.* 76(6):525-31.
- Olesen HL. 1992. Accumulated oxygen deficit increases with inclination of uphill running. *J Appl Physiol.* 73(3):1130-4.
- Pivarnik JM and Wilkerson JE. 1988. Recovery metabolism and thermoregulation of endurance trained and heat acclimatized men. *Sports Med Phys Fitness* 28(4):375-80.
- Renoux JC, Petit B, Billat V, and Koralsztein JP. 1999. Oxygen deficit is related to the exercise time to exhaustion at maximum aerobic speed in middle distance runners. 1: *Arch Physiol. Biochem.* 107(4):280-5.
- Roberts AD, Clark SA, Townsend NE, Anderson ME, Gore CJ, and Hahn AG. 2003. Changes in performance, maximum oxygen uptake and maximum accumulated oxygen deficit after 5, 10 and 15 days of live high:train low altitude exposure. *Eur J Appl Physiol.* 88(4-5):390-395.
- Roddin, MF, Ellis HT, and Siddiquee WM. 1979. *Background Data for Human Activity Patterns*, Vols. 1, 2. Draft Final Report prepared for Strategies and Air Standards Division, Office of Air Quality Planning and Standards, U.S. Environmental Protection Agency, Research Triangle Park, N.C.
- Schofield, WN. 1985. Predicting basal metabolic rate, new standards, and review of previous work. *Hum Nutr Clin Nutr*, 39C(Supplement 1):5 - 41.
- Sedlock DA. 1991a. Effect of exercise intensity on postexercise energy expenditure in women. *Br J Sports Med.* 25(1):38-40.
- Sedlock DA. 1991b. Postexercise energy expenditure following upper body exercise. *Res Q Exerc Sport.* 62(2):213-6.
- Short KR and Sedlock DA. 1997. Excess postexercise oxygen consumption and recovery rate in trained and untrained subjects. *J Appl Physiol*, 83(1):153-159.

Trost S, Wilcox A, and Gillis D. 1997. The effect of substrate utilization, manipulated by nicotinic acid, on excess postexercise oxygen consumption. *Int J Sports Med* 18(2):83-88.

Weber CL and Schneider DA. 2000. Maximum accumulated oxygen deficit expressed relative to the active muscle mass for cycling in untrained male and female subjects. *Eur J Appl Physiol.* 82(4):255-61.

Xue J, McCurdy T, Spengler O, Özkaynak, H. 2004. Understanding variability in the time spent in selected locations for 7-12 year old children. *J Exposure Anal Environ Epidemiol* 14(3) : 222-233.